

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1046	-58.5	9.791	-27.0	134.5	4.5	1894	36.0	46.97	67.5	4.583
-88.5	0.1397	-57.0	10.75	-25.5	171.4	6.0	1755	37.5	42.75	69.0	3.832
-87.0	0.2271	-55.5	12.02	-24.0	213.4	7.5	1613	39.0	39.71	70.5	3.108
-85.5	0.2793	-54.0	13.86	-22.5	258.9	9.0	1467	40.5	35.86	72.0	2.557
-84.0	0.3492	-52.5	15.85	-21.0	309.5	10.5	1318	42.0	33.28	73.5	1.972
-82.5	0.4190	-51.0	18.06	-19.5	375.8	12.0	1162	43.5	30.87	75.0	1.386
-81.0	0.4897	-49.5	20.03	-18.0	461.2	13.5	979.5	45.0	28.75	76.5	0.9441
-79.5	0.5752	-48.0	22.22	-16.5	580.1	15.0	808.3	46.5	26.63	78.0	0.7028
-78.0	0.6317	-46.5	25.10	-15.0	735.4	16.5	663.1	48.0	23.78	79.5	0.6502
-76.5	0.9507	-45.0	26.48	-13.5	911.4	18.0	536.8	49.5	21.33	81.0	0.5628
-75.0	1.408	-43.5	29.55	-12.0	1093	19.5	432.6	51.0	18.91	82.5	0.4579
-73.5	2.021	-42.0	31.69	-10.5	1262	21.0	362.7	52.5	16.72	84.0	0.3880
-72.0	2.578	-40.5	34.83	-9.0	1416	22.5	307.7	54.0	14.58	85.5	0.3312
-70.5	3.140	-39.0	38.34	-7.5	1582	24.0	259.0	55.5	12.77	87.0	0.2789
-69.0	3.856	-37.5	41.15	-6.0	1736	25.5	213.0	57.0	11.39	88.5	0.1762
-67.5	4.559	-36.0	44.85	-4.5	1869	27.0	170.3	58.5	10.24	90.0	0.1237
-66.0	5.313	-34.5	49.75	-3.0	2004	28.5	132.6	60.0	9.225		
-64.5	6.156	-33.0	56.91	-1.5	2074	30.0	100.9	61.5	8.185		
-63.0	6.973	-31.5	65.87	0.0	2094	31.5	78.17	63.0	7.137		
-61.5	7.331	-30.0	80.24	1.5	2085	33.0	62.97	64.5	6.272		
-60.0	8.835	-28.5	104.1	3.0	2025	34.5	53.16	66.0	5.363		

Electricity Parameter:

Current I: 0.1080A Power: 8.921W
Voltage V: 121.4V PF: 0.679


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 35.2deg @ (50%): 25.2deg @ (75%): 15.4deg @ (50%): 25.2deg
Diffuse angle: @ (25%): 35.2deg @ (50%): 25.2deg @ (75%): 15.4deg @ (50%): 25.2deg
Imax=2098cd (C=0.0deg,G=0.5deg) C0-180Plane Imax= 2098cd(G=0.5deg)
C0-180Plane I0= 2094cd

Lamp Type:8LED MR16
Tester:
Temperature:25.3deg
Manufacturer:

Luminaires Type:8LED MR16
Test Date:2014-09-02
Humidity:65%
Remarks:

Average Illuminance Figure

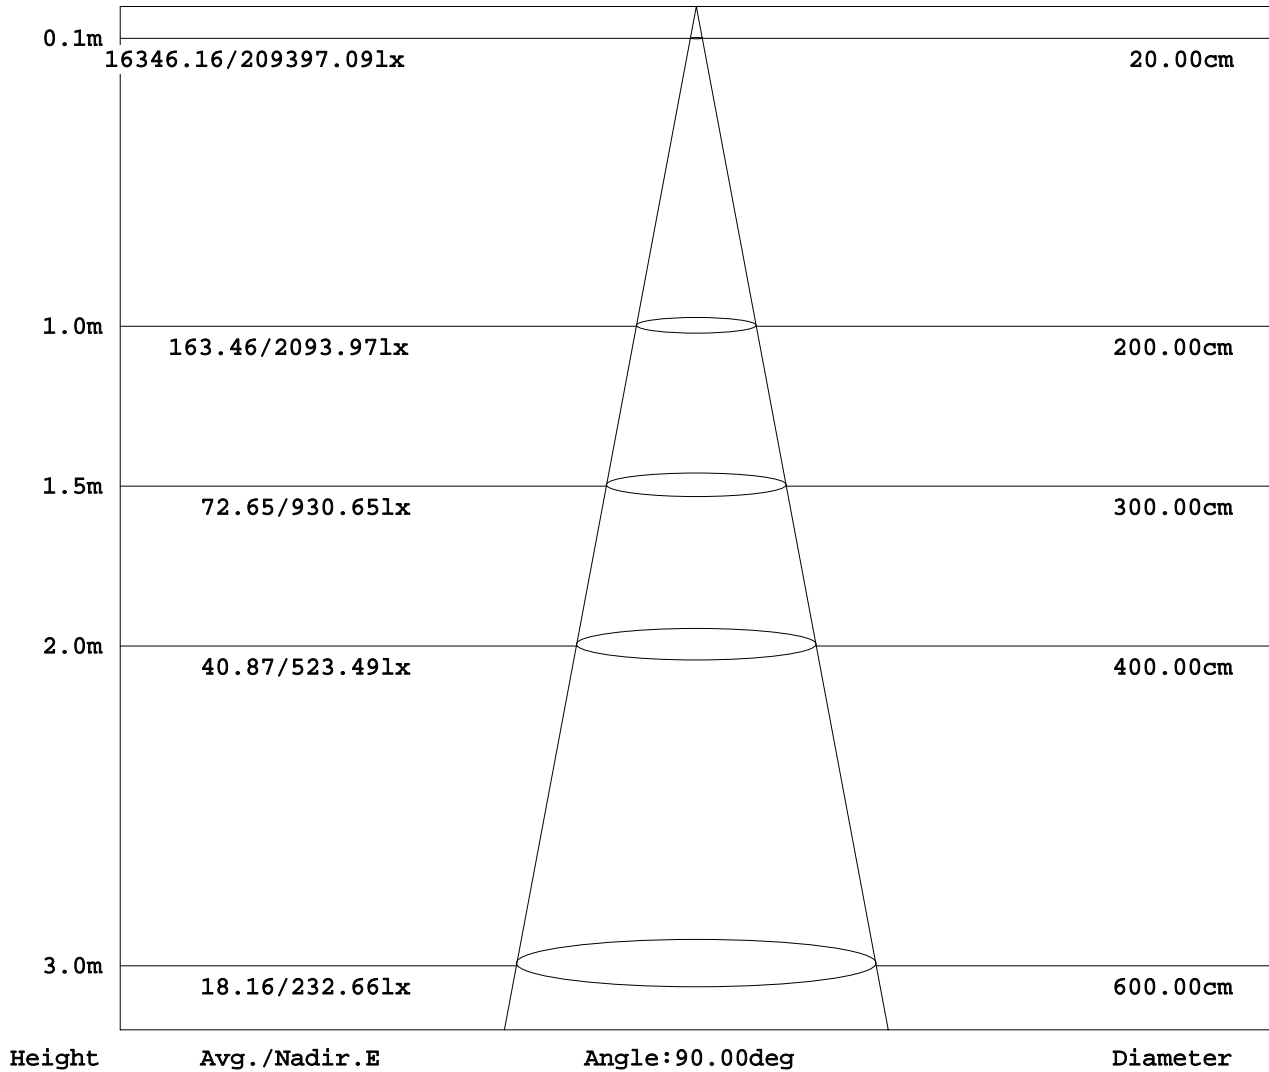

Lamp Type: 8LED MR16
 Tester:
 Temperature: 25.3deg
 Manufacturer:

Luminaires Type: 8LED MR16
 Test Date: 2014-09-02
 Humidity: 65%
 Remarks: