

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.9872	-58.0	20.79	-26.0	295.9	6.0	883.5	38.0	63.02	70.0	9.943
-88.0	1.931	-56.0	23.13	-24.0	358.9	8.0	831.1	40.0	53.35	72.0	8.852
-86.0	2.938	-54.0	25.87	-22.0	436.3	10.0	771.2	42.0	45.75	74.0	7.719
-84.0	3.924	-52.0	29.05	-20.0	520.7	12.0	703.8	44.0	39.72	76.0	6.683
-82.0	4.910	-50.0	32.81	-18.0	606.8	14.0	627.7	46.0	34.73	78.0	5.630
-80.0	6.021	-48.0	37.26	-16.0	690.6	16.0	547.2	48.0	30.63	80.0	4.623
-78.0	7.175	-46.0	42.55	-14.0	768.5	18.0	469.7	50.0	27.21	82.0	3.595
-76.0	8.287	-44.0	49.07	-12.0	836.2	20.0	394.9	52.0	24.25	84.0	2.609
-74.0	9.357	-42.0	57.18	-10.0	894.2	22.0	325.4	54.0	21.68	86.0	1.602
-72.0	10.46	-40.0	67.66	-8.0	939.3	24.0	264.6	56.0	19.53	88.0	0.6605
-70.0	11.53	-38.0	81.29	-6.0	971.4	26.0	213.8	58.0	17.64	90.0	0.3061
-68.0	12.77	-36.0	99.18	-4.0	989.4	28.0	171.8	60.0	16.00		
-66.0	14.05	-34.0	122.3	-2.0	992.9	30.0	138.3	62.0	14.60		
-64.0	15.43	-32.0	152.3	0.0	982.9	32.0	111.9	64.0	13.29		
-62.0	17.02	-30.0	190.3	2.0	960.5	34.0	91.28	66.0	12.10		
-60.0	18.82	-28.0	237.6	4.0	927.0	36.0	75.31	68.0	11.00		

**Electricity Parameter:**

Current I: 0.0240A Power: 4.300W  
Voltage V: 230.0V PF: 0.749


**Optical Parameter (Distance=3.000m):**

Diffuse angle: @ (25%): 52.2deg @ (50%): 37.8deg @ (75%): 25.4deg @ (50%): 37.8deg  
Diffuse angle: @ (25%): 52.3deg @ (50%): 38.0deg @ (75%): 25.8deg @ (50%): 38.0deg  
I<sub>max</sub>=992.9cd (C=0.0deg,G=-3.0deg) C0-180Plane I<sub>max</sub>= 992.9cd(G=-3.0deg)  
C0-180Plane I<sub>0</sub>= 982.9cd

Lamp Type:  
Tester:Damin  
Temperature:25.3deg  
Manufacturer:EVERFINE

Luminaires Type:  
Test Date:2013-11-07  
Humidity:65%  
Remarks:

**Average Illuminance Figure**

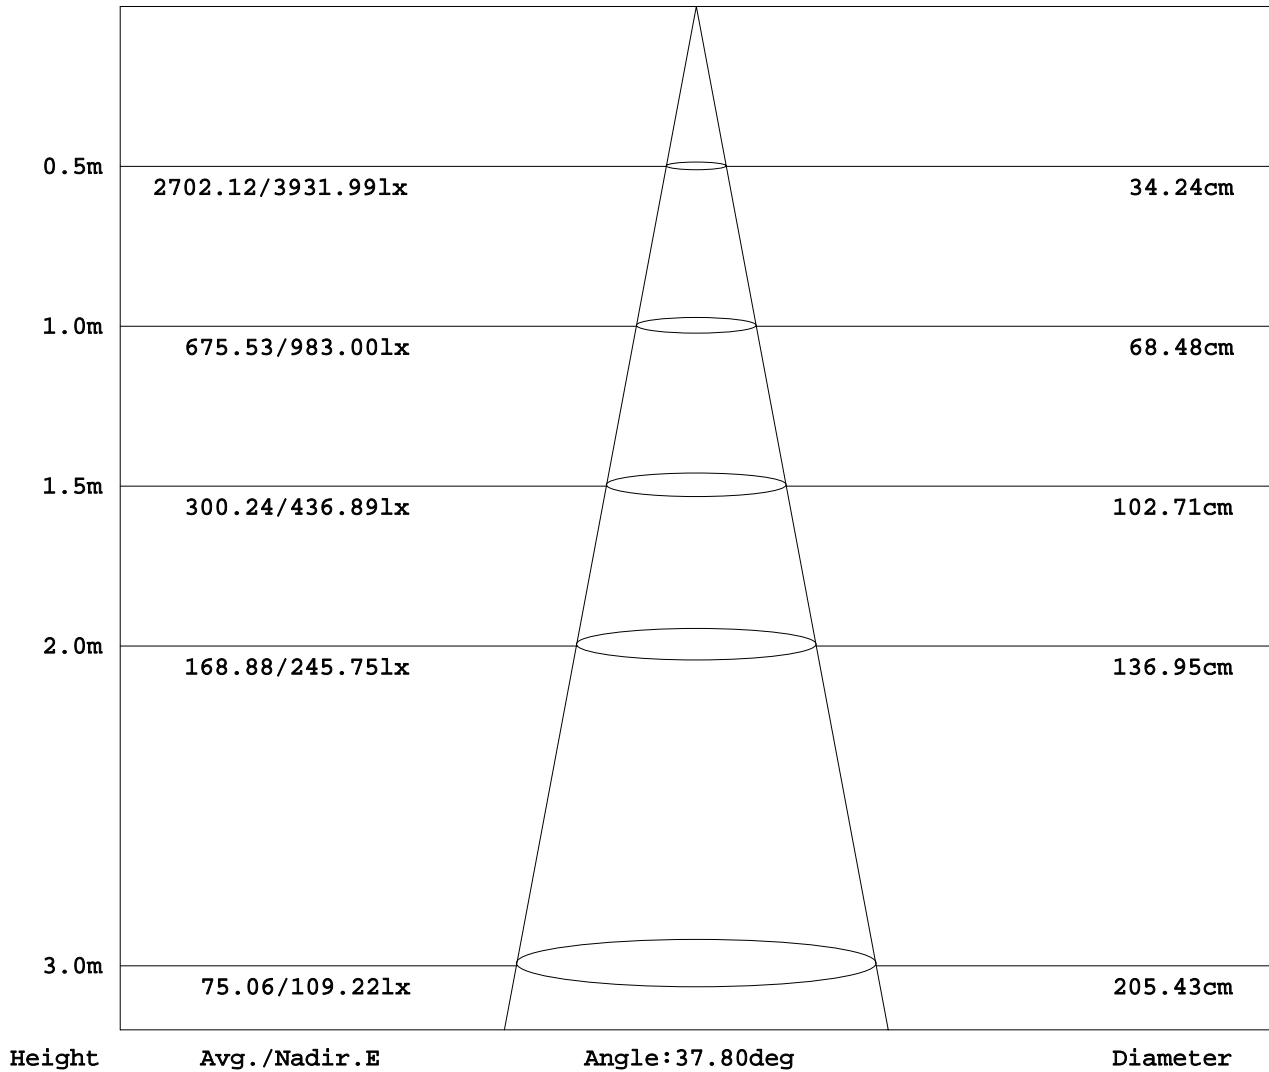

Lamp Type:  
Tester:Damin  
Temperature:25.3deg  
Manufacturer:EVERFINE

Luminaires Type:  
Test Date:2013-11-07  
Humidity:65%  
Remarks: