

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.2941	-58.0	12.83	-26.0	117.0	6.0	1753	38.0	38.61	70.0	7.301
-88.0	0.5668	-56.0	14.27	-24.0	159.4	8.0	1508	40.0	35.50	72.0	6.550
-86.0	1.195	-54.0	15.94	-22.0	221.9	10.0	1262	42.0	32.38	74.0	5.912
-84.0	2.013	-52.0	18.05	-20.0	306.8	12.0	1030	44.0	29.37	76.0	5.282
-82.0	2.789	-50.0	20.52	-18.0	421.6	14.0	821.0	46.0	26.42	78.0	4.490
-80.0	3.565	-48.0	23.10	-16.0	564.9	16.0	636.2	48.0	23.64	80.0	3.877
-78.0	4.300	-46.0	26.08	-14.0	734.9	18.0	467.9	50.0	21.13	82.0	3.030
-76.0	5.034	-44.0	29.37	-12.0	933.1	20.0	338.6	52.0	18.85	84.0	2.139
-74.0	5.686	-42.0	33.18	-10.0	1156	22.0	237.1	54.0	16.75	86.0	1.280
-72.0	6.398	-40.0	37.42	-8.0	1401	24.0	165.0	56.0	14.94	88.0	0.4855
-70.0	7.112	-38.0	41.88	-6.0	1653	26.0	117.3	58.0	13.43	90.0	0.0099
-68.0	7.824	-36.0	46.87	-4.0	1877	28.0	86.62	60.0	11.96		
-66.0	8.725	-34.0	52.49	-2.0	2043	30.0	67.36	62.0	10.78		
-64.0	9.564	-32.0	60.01	0.0	2120	32.0	55.39	64.0	9.802		
-62.0	10.65	-30.0	71.36	2.0	2091	34.0	47.57	66.0	8.870		
-60.0	11.70	-28.0	89.14	4.0	1962	36.0	42.28	68.0	7.968		

Electricity Parameter:

Current I: 0.0350A Power: 6.098W
Voltage V: 120.0V PF: 0.730


Optical Parameter (Distance=3.000m) :

Diffuse angle: @ (25%): 33.5deg @ (50%): 22.4deg @ (75%): 13.7deg @ (50%): 22.4deg
Diffuse angle: @ (25%): 33.5deg @ (50%): 22.5deg @ (75%): 13.8deg @ (50%): 22.5deg
Imax=2129cd (C=0.0deg,G=1.0deg) C0-180Plane Imax= 2129cd(G=1.0deg)
C0-180Plane I0= 2120cd

Lamp Type:
Tester:Damin
Temperature:25.3deg
Manufacturer:EVERFINE

Luminaires Type:
Test Date:2014-03-19
Humidity:65%
Remarks:

Average Illuminance Figure

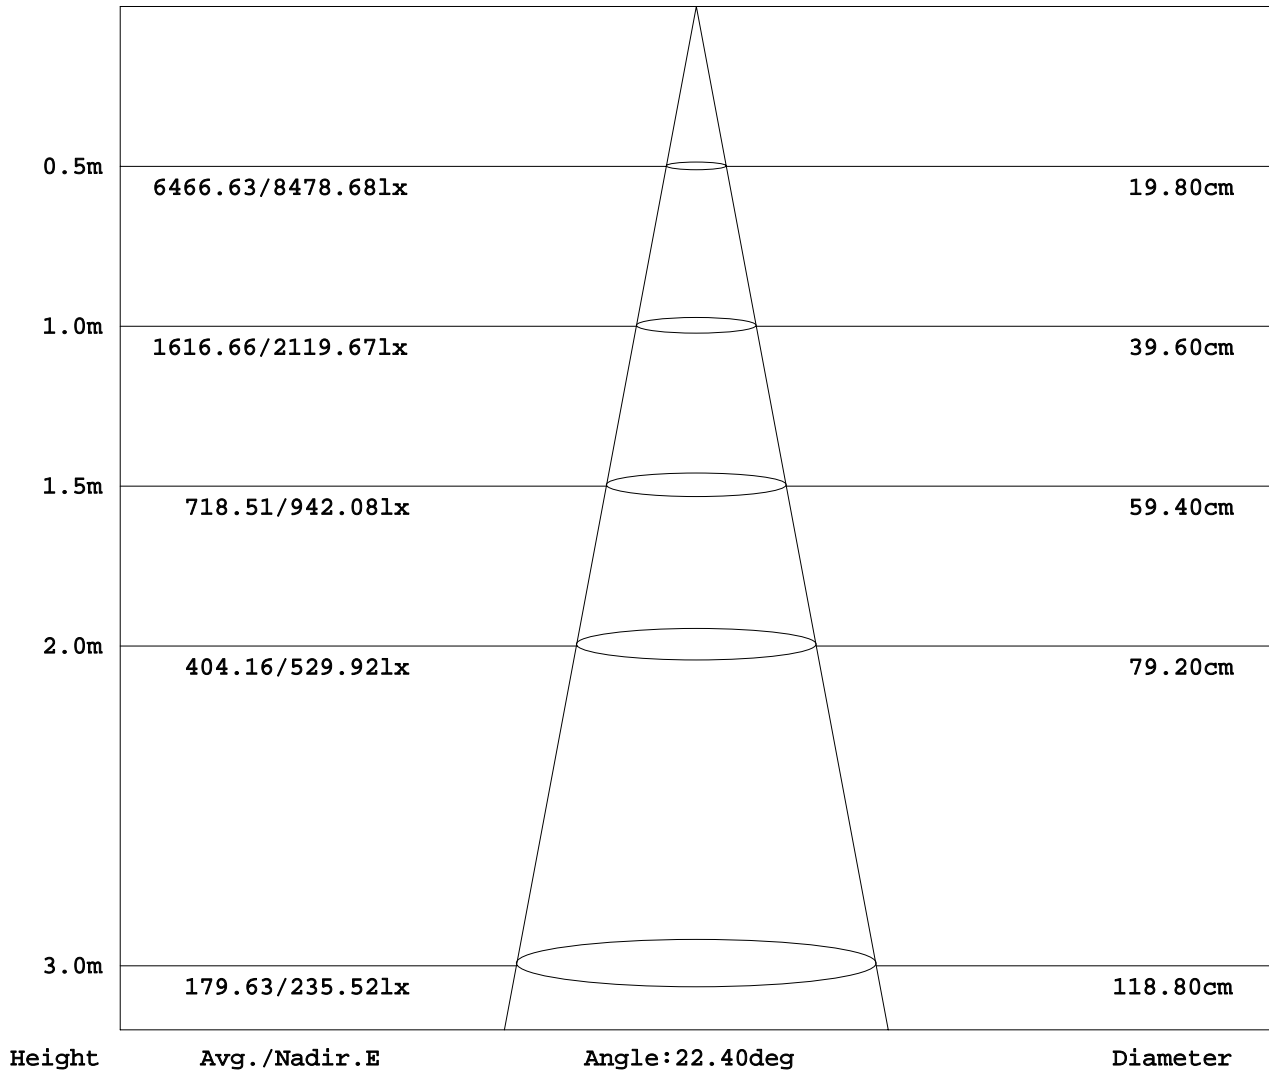

Lamp Type:
Tester: Damin
Temperature: 25.3deg
Manufacturer: EVERFINE

Luminaires Type:
Test Date: 2014-03-19
Humidity: 65%
Remarks: