

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1105	-58.5	8.761	-27.0	193.8	4.5	1691	36.0	33.67	67.5	3.568
-88.5	0.2212	-57.0	9.653	-25.5	232.6	6.0	1572	37.5	30.09	69.0	3.054
-87.0	0.2584	-55.5	10.83	-24.0	274.9	7.5	1433	39.0	27.39	70.5	2.559
-85.5	0.3504	-54.0	12.19	-22.5	317.5	9.0	1275	40.5	24.33	72.0	2.060
-84.0	0.4242	-52.5	13.72	-21.0	375.6	10.5	1106	42.0	22.72	73.5	1.577
-82.5	0.5164	-51.0	15.43	-19.5	446.8	12.0	948.2	43.5	20.99	75.0	1.124
-81.0	0.6086	-49.5	16.85	-18.0	537.5	13.5	781.0	45.0	19.99	76.5	0.8072
-79.5	0.6815	-48.0	18.43	-16.5	654.4	15.0	635.1	46.5	17.70	78.0	0.6844
-78.0	0.8160	-46.5	20.89	-15.0	795.2	16.5	506.1	48.0	15.96	79.5	0.5793
-76.5	1.209	-45.0	22.32	-13.5	945.0	18.0	414.9	49.5	14.43	81.0	0.4999
-75.0	1.708	-43.5	24.23	-12.0	1091	19.5	345.6	51.0	12.94	82.5	0.4286
-73.5	2.283	-42.0	26.23	-10.5	1248	21.0	289.3	52.5	11.55	84.0	0.3362
-72.0	2.817	-40.5	29.74	-9.0	1415	22.5	242.6	54.0	10.15	85.5	0.2417
-70.5	3.331	-39.0	34.16	-7.5	1559	24.0	200.5	55.5	9.082	87.0	0.2026
-69.0	3.944	-37.5	39.43	-6.0	1698	25.5	162.1	57.0	8.240	88.5	0.1124
-67.5	4.664	-36.0	47.91	-4.5	1825	27.0	128.8	58.5	7.584	90.0	0.1289
-66.0	5.278	-34.5	60.32	-3.0	1918	28.5	100.3	60.0	6.878		
-64.5	5.940	-33.0	77.38	-1.5	1956	30.0	77.79	61.5	6.135		
-63.0	6.663	-31.5	97.60	0.0	1945	31.5	61.85	63.0	5.462		
-61.5	7.396	-30.0	125.0	1.5	1914	33.0	48.38	64.5	4.830		
-60.0	8.048	-28.5	158.1	3.0	1825	34.5	39.32	66.0	4.192		

Electricity Parameter:

Current I: 0.0790A Power: 9.073W
Voltage V: 122.6V PF: 0.929


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 35.4deg @ (50%): 24.8deg @ (75%): 15.5deg @ (50%): 24.8deg
Diffuse angle: @ (25%): 35.5deg @ (50%): 24.9deg @ (75%): 15.7deg @ (50%): 24.9deg
Imax=1960cd (C=0.0deg,G=-2.0deg) C0-180Plane Imax= 1960cd(G=-2.0deg)
C0-180Plane I0= 1945cd

Lamp Type:CCT304 15W 24DU
Tester:
Temperature:25.3deg
Manufacturer:

Luminaires Type:CCT304 15W 24DU
Test Date:2015-03-10
Humidity:65%
Remarks:

Average Illuminance Figure

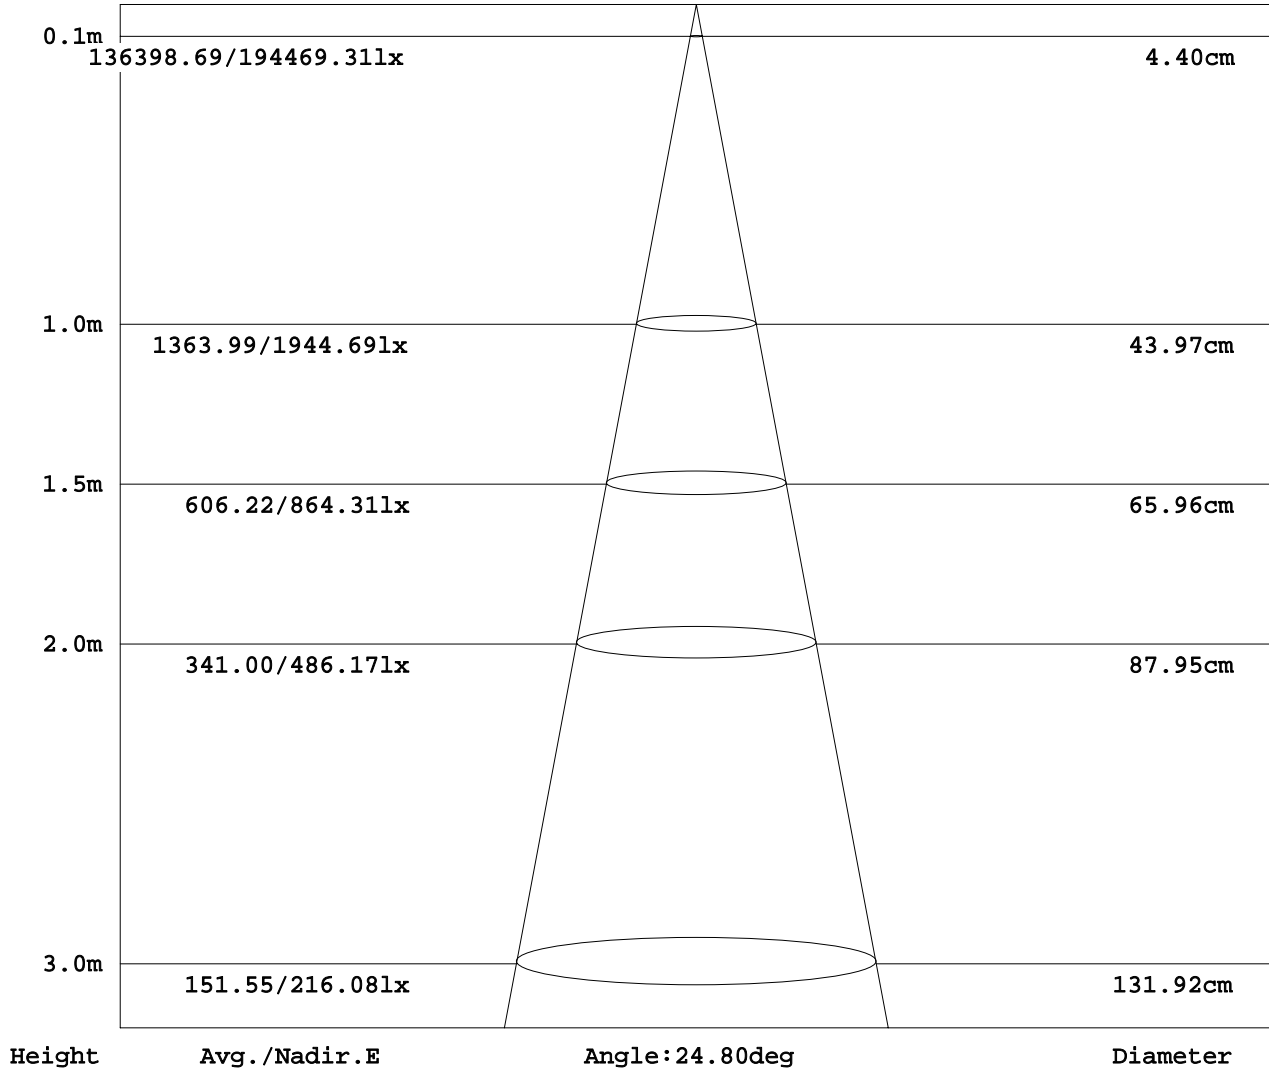

Lamp Type:CCT304 15W 24DU
 Tester:
 Temperature:25.3deg
 Manufacturer:

Luminaires Type:CCT304 15W 24DU
 Test Date:2015-03-10
 Humidity:65%
 Remarks: