

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.0737	-58.5	10.94	-27.0	192.0	4.5	1295	36.0	35.00	67.5	4.673
-88.5	0.1475	-57.0	12.14	-25.5	249.0	6.0	1239	37.5	32.22	69.0	3.813
-87.0	0.2032	-55.5	13.55	-24.0	312.3	7.5	1177	39.0	32.10	70.5	3.152
-85.5	0.2771	-54.0	14.87	-22.5	387.0	9.0	1107	40.5	32.07	72.0	2.513
-84.0	0.3516	-52.5	16.51	-21.0	473.5	10.5	1035	42.0	30.84	73.5	1.900
-82.5	0.4434	-51.0	18.58	-19.5	570.6	12.0	959.6	43.5	28.44	75.0	1.357
-81.0	0.5366	-49.5	20.29	-18.0	660.5	13.5	881.4	45.0	26.04	76.5	0.8716
-79.5	0.6825	-48.0	22.06	-16.5	743.8	15.0	796.0	46.5	23.60	78.0	0.6689
-78.0	0.8355	-46.5	24.27	-15.0	829.7	16.5	709.0	48.0	21.16	79.5	0.5609
-76.5	1.301	-45.0	26.23	-13.5	911.0	18.0	622.1	49.5	19.13	81.0	0.4631
-75.0	1.896	-43.5	29.07	-12.0	994.8	19.5	512.5	51.0	17.03	82.5	0.4052
-73.5	2.558	-42.0	30.36	-10.5	1080	21.0	419.3	52.5	15.22	84.0	0.3315
-72.0	3.149	-40.5	30.98	-9.0	1150	22.5	333.6	54.0	13.76	85.5	0.2601
-70.5	3.837	-39.0	31.73	-7.5	1215	24.0	257.3	55.5	12.22	87.0	0.2026
-69.0	4.633	-37.5	34.66	-6.0	1273	25.5	192.8	57.0	10.90	88.5	0.1842
-67.5	5.464	-36.0	39.32	-4.5	1320	27.0	140.2	58.5	9.919	90.0	0.1658
-66.0	6.472	-34.5	46.80	-3.0	1349	28.5	102.0	60.0	9.356		
-64.5	7.596	-33.0	59.85	-1.5	1364	30.0	74.53	61.5	8.639		
-63.0	8.622	-31.5	79.10	0.0	1363	31.5	56.27	63.0	7.651		
-61.5	9.440	-30.0	107.2	1.5	1361	33.0	45.27	64.5	6.547		
-60.0	10.04	-28.5	144.7	3.0	1344	34.5	38.67	66.0	5.505		

Electricity Parameter:

Current I: 0.0780A Power: 8.758W
Voltage V: 120.6V PF: 0.929


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 45.6deg @ (50%): 34.2deg @ (75%): 21.8deg @ (50%): 34.2deg
Diffuse angle: @ (25%): 45.7deg @ (50%): 34.5deg @ (75%): 22.1deg @ (50%): 34.5deg
Imax=1374cd (C=0.0deg,G=0.5deg) C0-180Plane Imax= 1374cd(G=0.5deg)
C0-180Plane I0= 1363cd

Lamp Type: 泛光灯
Tester:
Temperature: 25.3deg
Manufacturer:

Luminaires Type:
Test Date: 2015-03-20
Humidity: 65%
Remarks:

Average Illuminance Figure

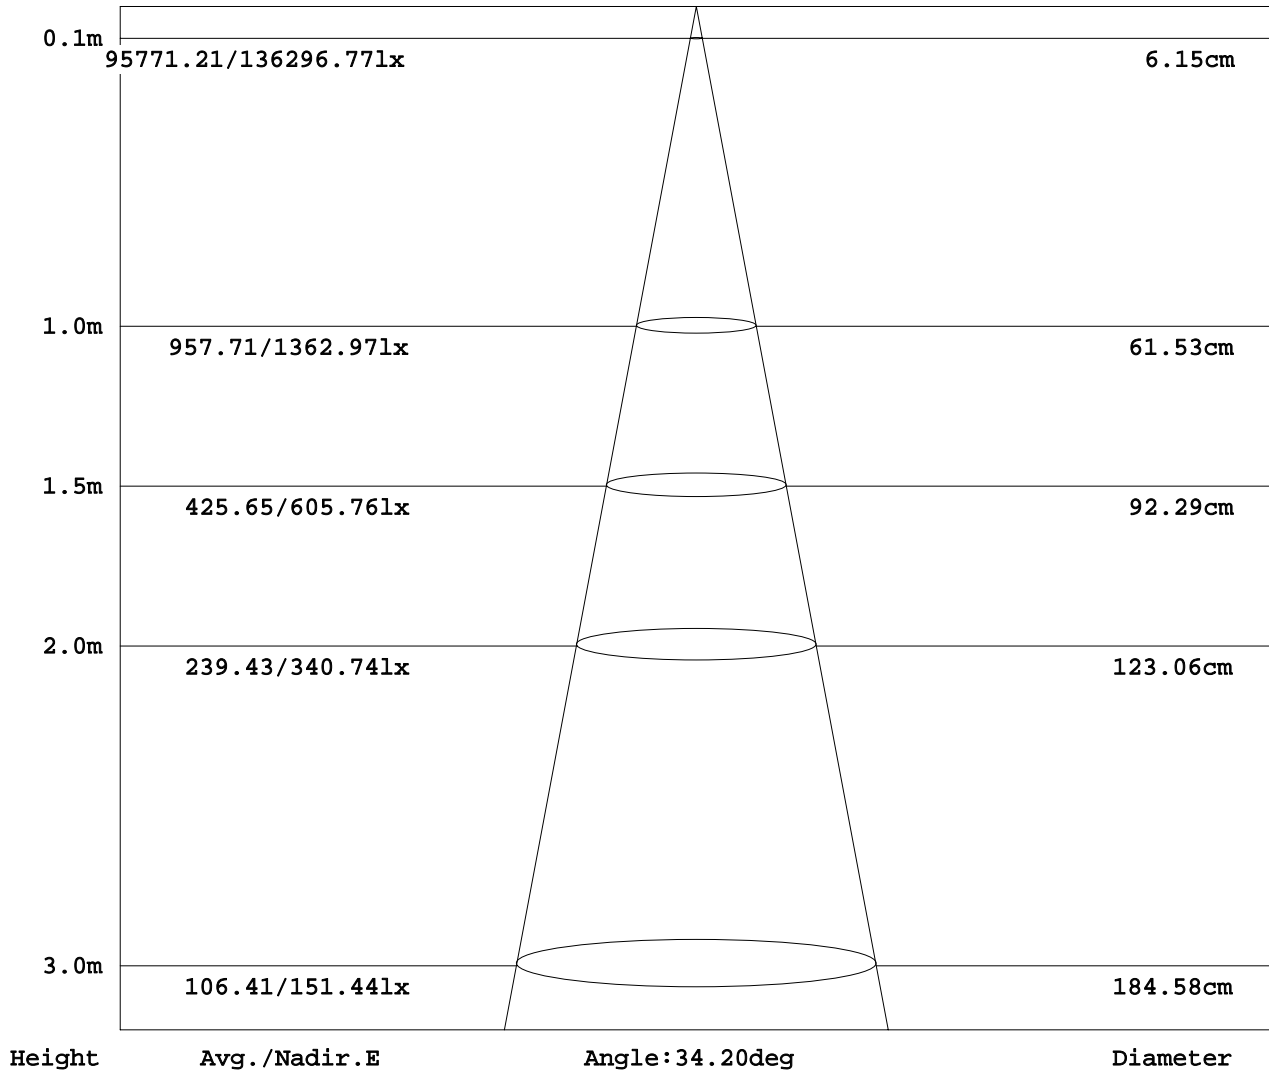

Lamp Type: 泛光灯
 Tester:
 Temperature: 25.3deg
 Manufacturer:

Luminaires Type:
 Test Date: 2015-03-20
 Humidity: 65%
 Remarks: