

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1842	-58.5	12.23	-27.0	232.0	4.5	1702	36.0	44.64	67.5	4.331
-88.5	0.3133	-57.0	13.61	-25.5	283.2	6.0	1575	37.5	40.79	69.0	3.592
-87.0	0.4058	-55.5	15.51	-24.0	336.0	7.5	1439	39.0	36.50	70.5	2.946
-85.5	0.5530	-54.0	17.68	-22.5	402.2	9.0	1314	40.5	33.92	72.0	2.303
-84.0	0.6642	-52.5	20.20	-21.0	491.9	10.5	1163	42.0	30.89	73.5	1.657
-82.5	0.8118	-51.0	22.71	-19.5	611.5	12.0	993.3	43.5	29.40	75.0	1.164
-81.0	0.9594	-49.5	25.05	-18.0	749.5	13.5	841.5	45.0	26.29	76.5	0.9669
-79.5	1.070	-48.0	27.69	-16.5	899.1	15.0	697.7	46.5	24.09	78.0	0.8773
-78.0	1.280	-46.5	29.84	-15.0	1056	16.5	561.7	48.0	21.79	79.5	0.7635
-76.5	1.838	-45.0	31.79	-13.5	1223	18.0	451.9	49.5	19.08	81.0	0.6157
-75.0	2.539	-43.5	34.30	-12.0	1389	19.5	379.0	51.0	16.57	82.5	0.5207
-73.5	3.186	-42.0	36.68	-10.5	1532	21.0	321.3	52.5	14.51	84.0	0.4076
-72.0	3.835	-40.5	40.23	-9.0	1633	22.5	270.1	54.0	12.76	85.5	0.3315
-70.5	4.646	-39.0	44.04	-7.5	1737	24.0	225.3	55.5	11.47	87.0	0.2394
-69.0	5.403	-37.5	49.22	-6.0	1840	25.5	182.6	57.0	10.43	88.5	0.1658
-67.5	6.217	-36.0	57.09	-4.5	1926	27.0	144.4	58.5	9.353	90.0	0.1640
-66.0	7.073	-34.5	69.42	-3.0	1987	28.5	114.7	60.0	8.416		
-64.5	8.010	-33.0	87.76	-1.5	2033	30.0	91.02	61.5	7.479		
-63.0	9.001	-31.5	112.6	0.0	2003	31.5	72.23	63.0	6.611		
-61.5	10.03	-30.0	145.4	1.5	1907	33.0	58.70	64.5	5.808		
-60.0	11.05	-28.5	185.6	3.0	1823	34.5	50.13	66.0	5.066		

Electricity Parameter:

Current I: 0.0810A Power: 9.028W
Voltage V: 120.4V PF: 0.922


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 37.7deg @ (50%): 27.0deg @ (75%): 17.0deg @ (50%): 27.0deg
Diffuse angle: @ (25%): 38.0deg @ (50%): 27.4deg @ (75%): 17.5deg @ (50%): 27.4deg
Imax=2038cd (C=0.0deg,G=-1.0deg) C0-180Plane Imax= 2038cd(G=-1.0deg)
C0-180Plane I0= 2003cd

Lamp Type: 泛光灯
Tester:
Temperature: 25.3deg
Manufacturer:

Luminaires Type:
Test Date: 2015-03-20
Humidity: 65%
Remarks:

Average Illuminance Figure

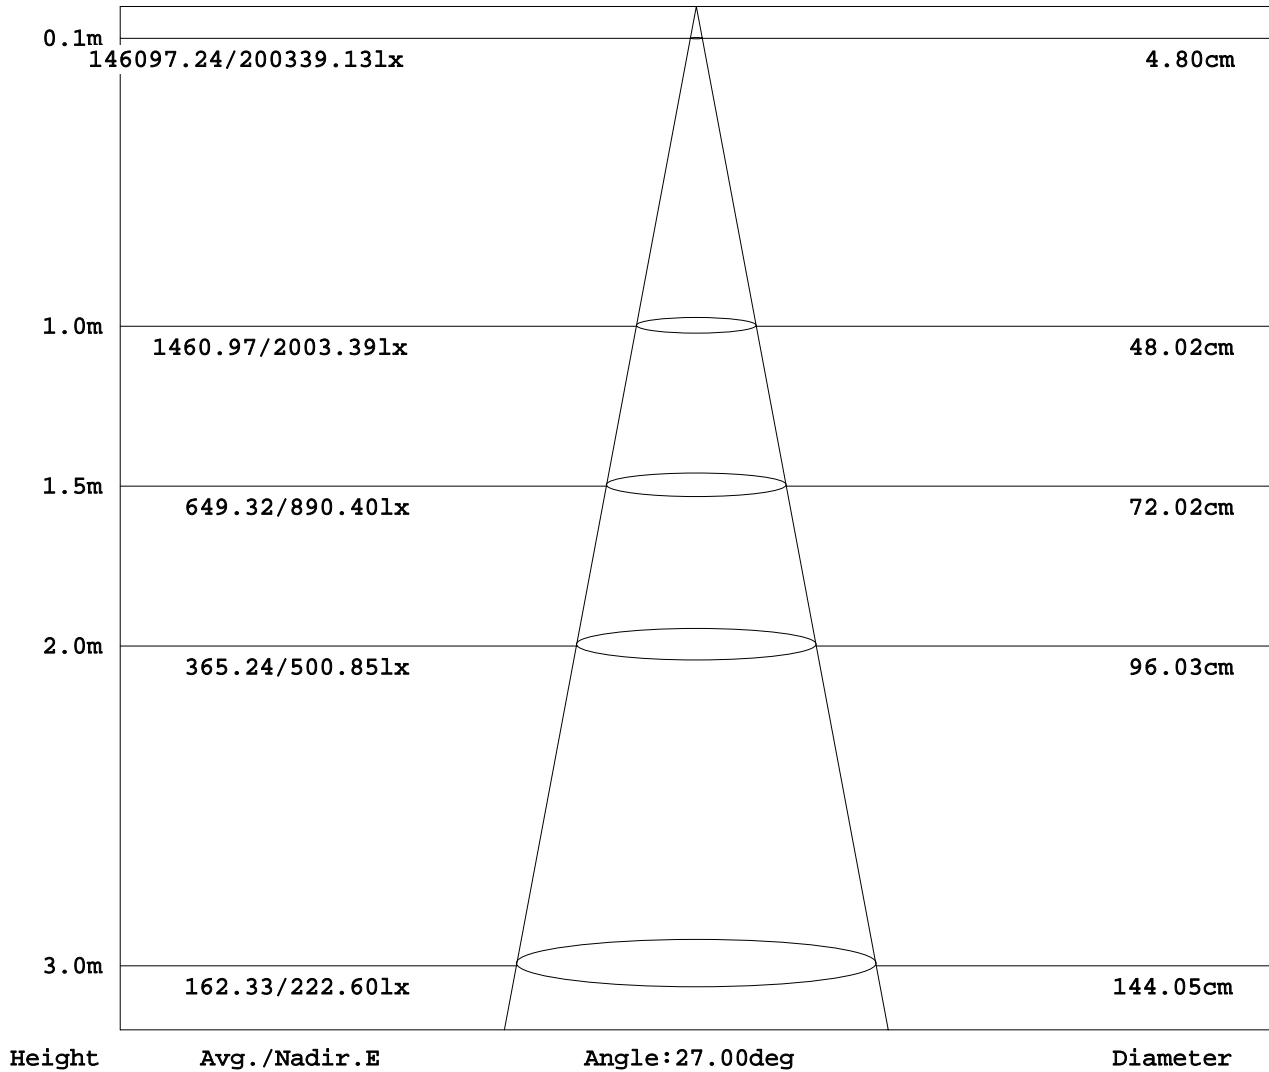

Lamp Type: 泛光灯
 Tester:
 Temperature: 25.3deg
 Manufacturer:

Luminaires Type:
 Test Date: 2015-03-20
 Humidity: 65%
 Remarks: