

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1473	-58.5	11.88	-27.0	241.5	4.5	1209	36.0	41.33	67.5	4.504
-88.5	0.2396	-57.0	13.30	-25.5	295.3	6.0	1142	37.5	39.56	69.0	3.662
-87.0	0.3315	-55.5	14.78	-24.0	363.4	7.5	1066	39.0	37.06	70.5	3.008
-85.5	0.4052	-54.0	16.24	-22.5	437.6	9.0	1004	40.5	33.61	72.0	2.347
-84.0	0.4979	-52.5	18.04	-21.0	516.4	10.5	941.9	42.0	30.25	73.5	1.638
-82.5	0.5724	-51.0	19.91	-19.5	601.6	12.0	871.4	43.5	27.97	75.0	1.075
-81.0	0.7007	-49.5	21.97	-18.0	687.8	13.5	800.6	45.0	24.44	76.5	0.8564
-79.5	0.8317	-48.0	24.76	-16.5	774.9	15.0	719.8	46.5	21.99	78.0	0.7552
-78.0	1.022	-46.5	27.88	-15.0	847.2	16.5	642.2	48.0	20.05	79.5	0.6133
-76.5	1.563	-45.0	30.48	-13.5	919.8	18.0	562.2	49.5	18.05	81.0	0.5210
-75.0	2.209	-43.5	33.27	-12.0	992.4	19.5	471.2	51.0	16.50	82.5	0.4286
-73.5	2.853	-42.0	35.97	-10.5	1057	21.0	397.4	52.5	15.16	84.0	0.3202
-72.0	3.504	-40.5	38.82	-9.0	1119	22.5	329.8	54.0	13.75	85.5	0.2439
-70.5	4.338	-39.0	40.08	-7.5	1172	24.0	267.9	55.5	12.39	87.0	0.1658
-69.0	5.206	-37.5	44.17	-6.0	1232	25.5	212.7	57.0	11.17	88.5	0.0940
-67.5	6.135	-36.0	51.94	-4.5	1280	27.0	163.7	58.5	10.02	90.0	0.0571
-66.0	7.223	-34.5	64.71	-3.0	1318	28.5	122.9	60.0	9.277		
-64.5	8.249	-33.0	84.75	-1.5	1339	30.0	91.42	61.5	8.506		
-63.0	8.960	-31.5	113.5	0.0	1322	31.5	69.61	63.0	7.508		
-61.5	9.580	-30.0	151.8	1.5	1296	33.0	54.16	64.5	6.367		
-60.0	10.58	-28.5	191.4	3.0	1262	34.5	45.28	66.0	5.387		

Electricity Parameter:

Current I: 0.0780A Power: 8.401W
Voltage V: 119.1V PF: 0.902


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 46.9deg @ (50%): 34.2deg @ (75%): 20.5deg @ (50%): 34.2deg
Diffuse angle: @ (25%): 47.1deg @ (50%): 34.5deg @ (75%): 21.3deg @ (50%): 34.5deg
Imax=1341cd (C=0.0deg,G=-1.0deg) C0-180Plane Imax= 1341cd(G=-1.0deg)
C0-180Plane I0= 1322cd

Lamp Type: 泛光灯
Tester:
Temperature: 25.3deg
Manufacturer:

Luminaires Type:
Test Date: 2015-03-20
Humidity: 65%
Remarks:

Average Illuminance Figure

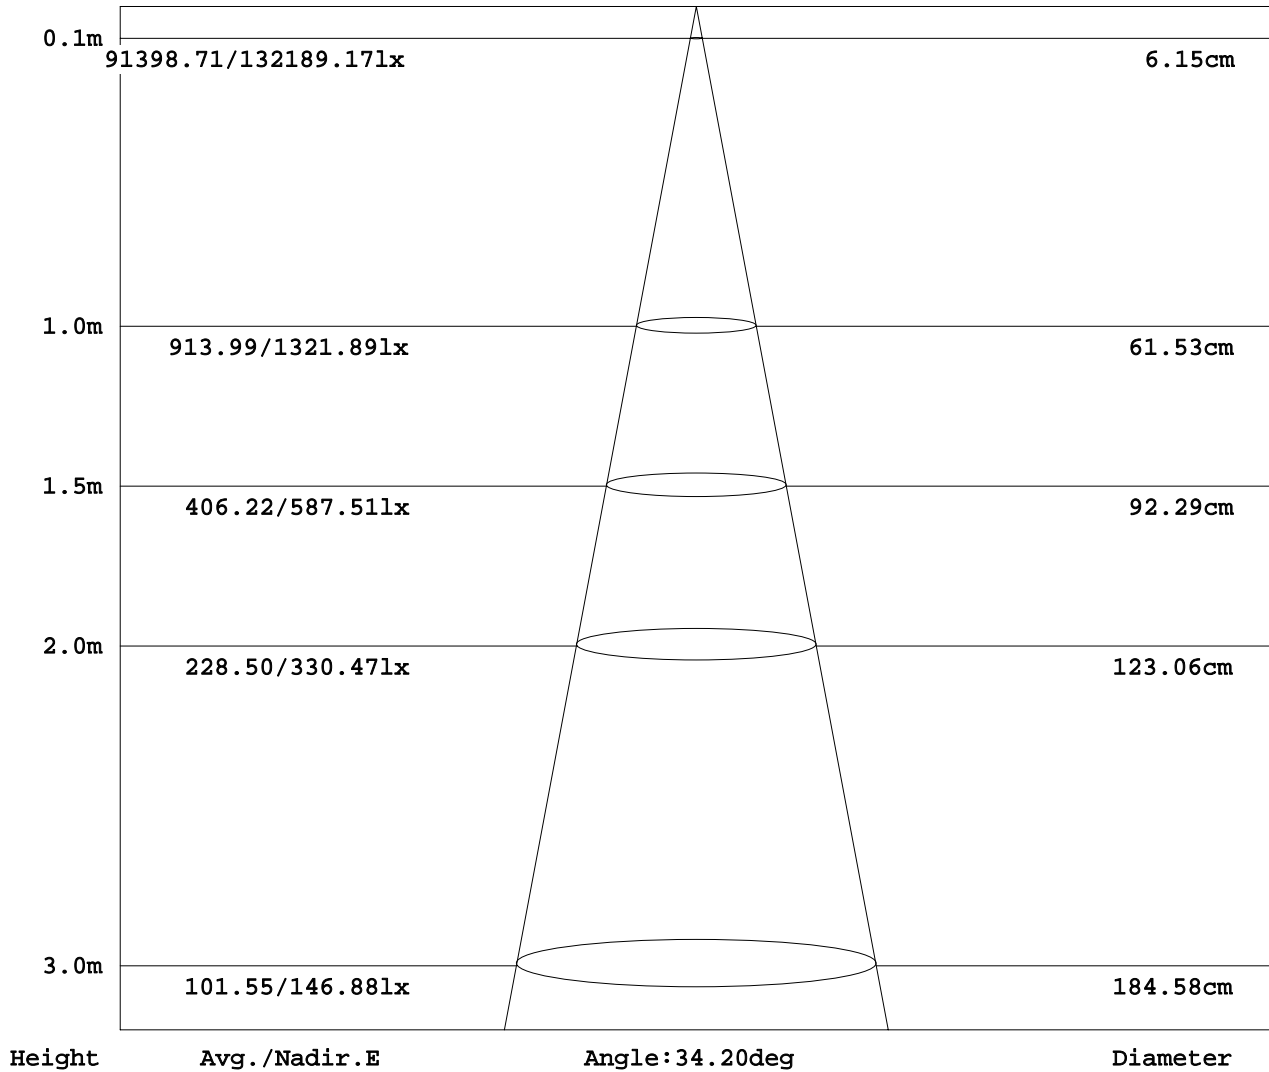

Lamp Type: 泛光灯
 Tester:
 Temperature: 25.3deg
 Manufacturer:

Luminaires Type:
 Test Date: 2015-03-20
 Humidity: 65%
 Remarks: