

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1105	-58.5	11.90	-27.0	282.6	4.5	1276	36.0	39.81	67.5	3.933
-88.5	0.1843	-57.0	13.53	-25.5	348.0	6.0	1201	37.5	38.18	69.0	3.209
-87.0	0.2397	-55.5	15.30	-24.0	424.7	7.5	1116	39.0	36.64	70.5	2.566
-85.5	0.3139	-54.0	17.31	-22.5	511.3	9.0	1034	40.5	34.52	72.0	1.901
-84.0	0.3873	-52.5	19.87	-21.0	607.8	10.5	955.4	42.0	32.09	73.5	1.322
-82.5	0.4612	-51.0	22.73	-19.5	700.4	12.0	881.9	43.5	29.94	75.0	0.8479
-81.0	0.5542	-49.5	25.65	-18.0	779.3	13.5	807.6	45.0	26.63	76.5	0.6139
-79.5	0.6844	-48.0	29.22	-16.5	860.0	15.0	727.5	46.5	23.07	78.0	0.5002
-78.0	1.004	-46.5	32.07	-15.0	936.1	16.5	642.0	48.0	20.37	79.5	0.4264
-76.5	1.541	-45.0	34.59	-13.5	1013	18.0	547.2	49.5	17.96	81.0	0.3526
-75.0	2.153	-43.5	36.91	-12.0	1092	19.5	454.8	51.0	15.64	82.5	0.2813
-73.5	2.814	-42.0	38.46	-10.5	1168	21.0	372.8	52.5	14.00	84.0	0.2257
-72.0	3.445	-40.5	39.96	-9.0	1238	22.5	299.5	54.0	12.41	85.5	0.1842
-70.5	4.211	-39.0	42.39	-7.5	1298	24.0	237.1	55.5	10.99	87.0	0.1105
-69.0	5.096	-37.5	48.47	-6.0	1349	25.5	185.1	57.0	9.941	88.5	0.0717
-67.5	6.027	-36.0	57.97	-4.5	1382	27.0	141.1	58.5	9.205	90.0	0.0386
-66.0	7.190	-34.5	73.57	-3.0	1401	28.5	105.2	60.0	8.679		
-64.5	8.178	-33.0	97.63	-1.5	1392	30.0	79.17	61.5	7.935		
-63.0	8.923	-31.5	131.7	0.0	1400	31.5	62.09	63.0	6.909		
-61.5	9.556	-30.0	173.5	1.5	1371	33.0	50.82	64.5	5.770		
-60.0	10.49	-28.5	223.7	3.0	1329	34.5	43.97	66.0	4.820		

**Electricity Parameter:**

Current I: 0.0810A Power: 9.011W  
Voltage V: 119.3V PF: 0.930


**Optical Parameter (Distance=2.900m) :**

Diffuse angle: @ (25%): 46.8deg @ (50%): 34.9deg @ (75%): 21.4deg @ (50%): 34.9deg  
Diffuse angle: @ (25%): 46.8deg @ (50%): 35.0deg @ (75%): 21.5deg @ (50%): 35.0deg  
Imax=1402cd (C=0.0deg,G=-0.5deg) C0-180Plane Imax= 1402cd(G=-0.5deg)  
C0-180Plane I0= 1400cd

Lamp Type: 泛光灯  
Tester:  
Temperature: 25.3deg  
Manufacturer:

Luminaires Type:  
Test Date: 2015-03-20  
Humidity: 65%  
Remarks:

**Average Illuminance Figure**

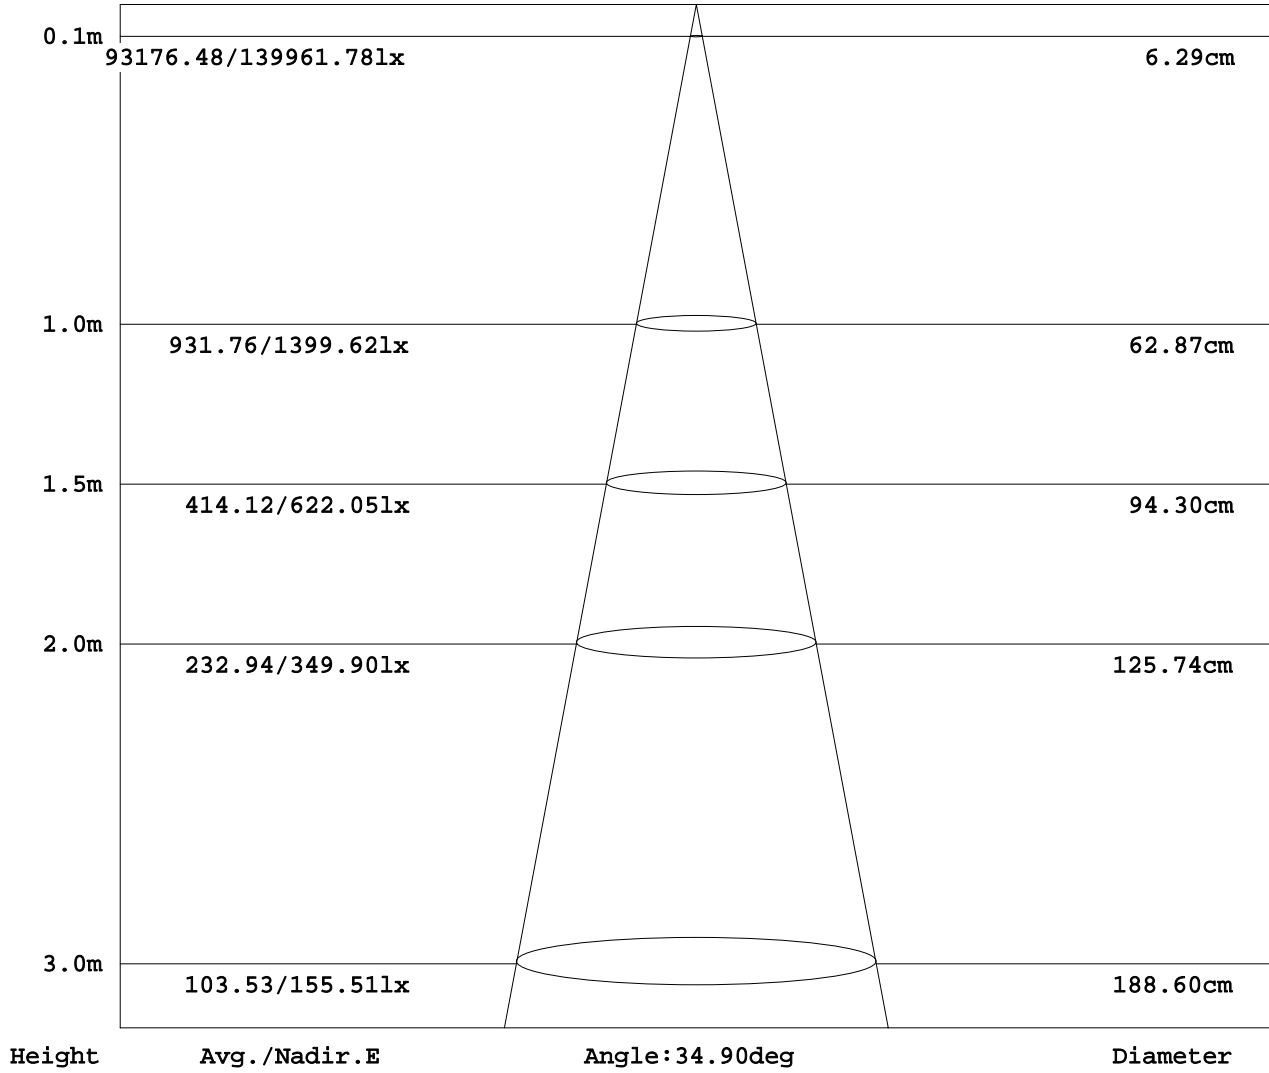

Lamp Type: 泛光灯  
 Tester:  
 Temperature: 25.3deg  
 Manufacturer:

Luminaires Type:  
 Test Date: 2015-03-20  
 Humidity: 65%  
 Remarks: