

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.7844	-58.5	54.20	-27.0	373.6	4.5	2023	36.0	137.7	67.5	34.73
-88.5	2.724	-57.0	57.33	-25.5	454.0	6.0	1950	37.5	125.4	69.0	32.22
-87.0	5.084	-55.5	60.65	-24.0	560.6	7.5	1860	39.0	114.7	70.5	29.79
-85.5	7.707	-54.0	64.43	-22.5	697.4	9.0	1756	40.5	105.6	72.0	27.37
-84.0	10.47	-52.5	68.41	-21.0	860.0	10.5	1640	42.0	97.71	73.5	24.86
-82.5	13.33	-51.0	72.82	-19.5	1035	12.0	1515	43.5	90.63	75.0	22.30
-81.0	16.13	-49.5	77.71	-18.0	1210	13.5	1377	45.0	84.46	76.5	19.64
-79.5	18.92	-48.0	83.16	-16.5	1375	15.0	1225	46.5	79.08	78.0	16.90
-78.0	21.65	-46.5	89.31	-15.0	1523	16.5	1062	48.0	74.27	79.5	14.11
-76.5	24.29	-45.0	96.15	-13.5	1657	18.0	893.4	49.5	69.89	81.0	11.35
-75.0	26.80	-43.5	103.8	-12.0	1778	19.5	734.8	51.0	65.95	82.5	8.534
-73.5	29.28	-42.0	112.5	-10.5	1887	21.0	598.4	52.5	62.34	84.0	5.883
-72.0	31.72	-40.5	122.5	-9.0	1978	22.5	480.9	54.0	58.82	85.5	3.423
-70.5	34.19	-39.0	133.8	-7.5	2049	24.0	396.4	55.5	55.66	87.0	1.374
-69.0	36.61	-37.5	147.2	-6.0	2099	25.5	333.8	57.0	52.66	88.5	0.0936
-67.5	38.95	-36.0	162.9	-4.5	2132	27.0	284.9	58.5	49.88	90.0	0.0366
-66.0	41.28	-34.5	181.8	-3.0	2149	28.5	246.2	60.0	47.18		
-64.5	43.64	-33.0	205.0	-1.5	2152	30.0	215.2	61.5	44.59		
-63.0	46.11	-31.5	233.7	0.0	2141	31.5	190.1	63.0	42.07		
-61.5	48.65	-30.0	270.5	1.5	2117	33.0	169.4	64.5	39.63		
-60.0	51.36	-28.5	314.1	3.0	2078	34.5	152.3	66.0	37.19		

**Electricity Parameter:**

Current I: 0.1840A Power: 17.81W  
Voltage V: 114.0V PF: 0.847


**Optical Parameter (Distance=2.900m) :**

Diffuse angle: @ (25%): 45.9deg @ (50%): 35.4deg @ (75%): 24.7deg @ (50%): 35.4deg  
Diffuse angle: @ (25%): 46.1deg @ (50%): 35.6deg @ (75%): 24.9deg @ (50%): 35.6deg  
Imax=2152cd (C=0.0deg,G=-2.0deg) C0-180Plane Imax= 2152cd(G=-2.0deg)  
C0-180Plane I0= 2141cd

Lamp Type:8LED MR16  
Tester:  
Temperature:25.3deg  
Manufacturer:

Luminaires Type:8LED MR16  
Test Date:2014-08-01  
Humidity:65%  
Remarks:

**Average Illuminance Figure**

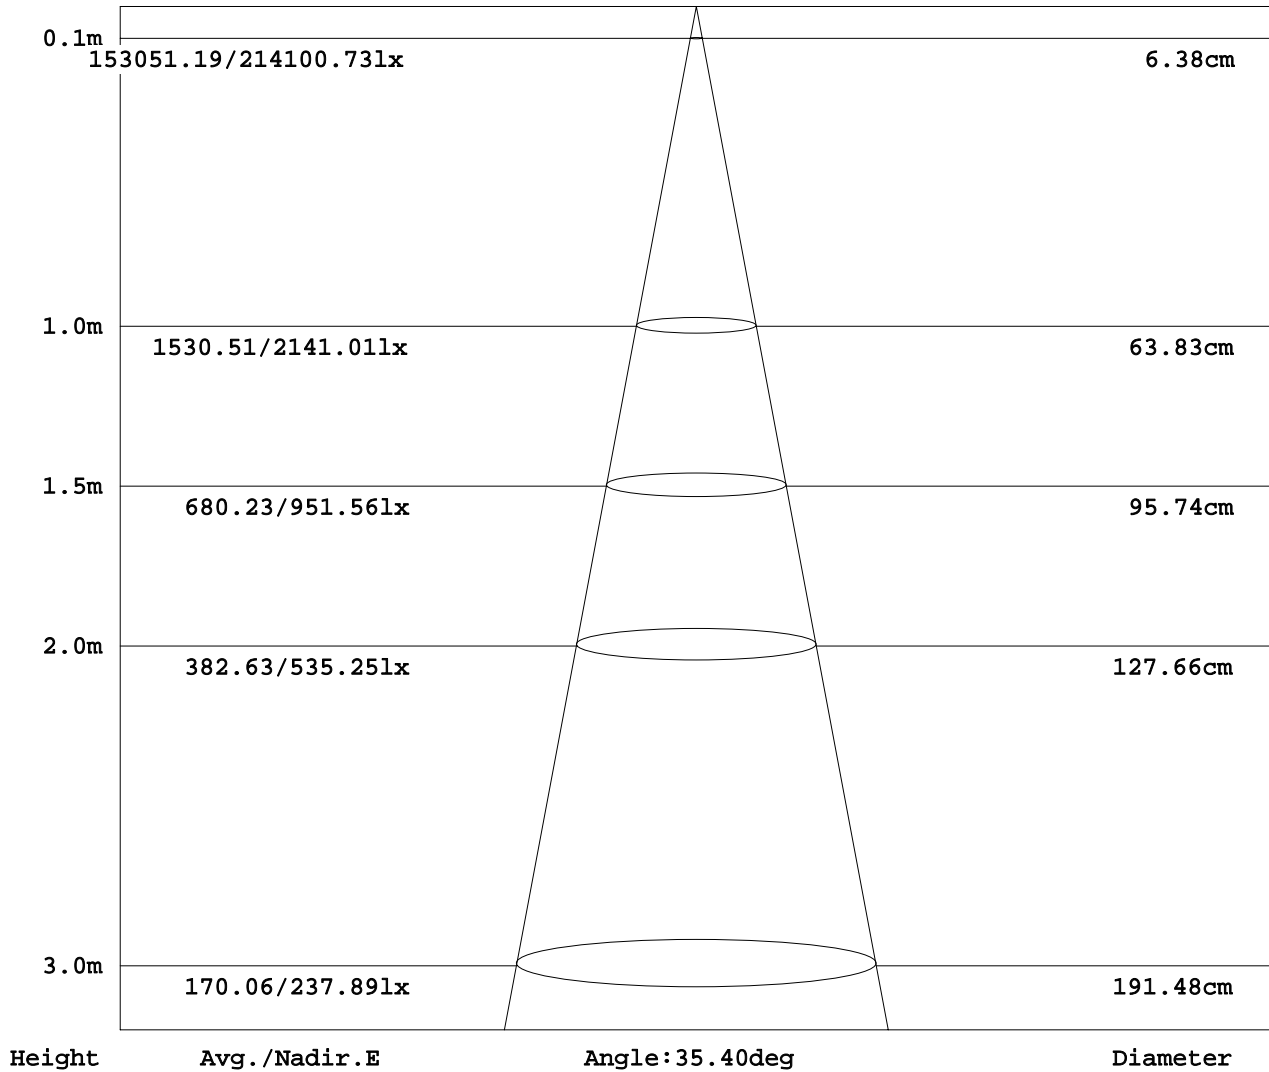

Lamp Type: 8LED MR16  
 Tester:  
 Temperature: 25.3deg  
 Manufacturer:

Luminaires Type: 8LED MR16  
 Test Date: 2014-08-01  
 Humidity: 65%  
 Remarks: