

# Architectural 6W LED Diffuse C37 500LM Dimmable CIVILIGHT®




## Features

- Ra93,R9=80
- FLORA heat sink design
- 60W incandescent equivalent
- 85% energy saving
- Smooth dimming
- UL and RoHS compliant

## Applications

- Home, apartment and other residential buildings
- Hotels, restaurants, bars

Part No.	DC37 K2F40Q6-12309	DC37 K2F40Q6-11269
Wattage (W)	6	6
Incandescent Equivalent (W)	60W	60W
Dimmable	Yes	Yes
Socket	E12	E12
Lumens (lm)	500	500
Luminous Efficiency (lm/W)	80	80
PF	>0.7	>0.7
CCT (K)	2500K	2700K
CRI (Ra)	93	90
Voltage (V)	AC120	AC120
Current (mA)	0.073	0.073
Frequency (Hz)	60	60
Lifespan (hrs)	25000	25000
Working Temperature (°C)	-20 ~ 40	-20 ~ 40
Storage Temperature (°C)	-20 ~ 85	-20 ~ 85
Weight (ounces)	1.94	1.94

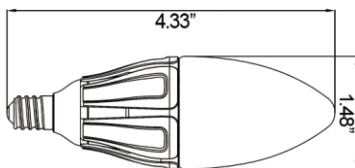

At \$0.11 per kWh, this 6W LED candle estimates energy cost \$0.72 per year, using \$16.5 of electricity over its 25000 hour lifetime. This is a \$148.5 savings when compared to the \$165 required to run a 60W incandescent over the same period. Actual savings will vary depending on cost per kWh. 22.8 years means rated average life based on engineering testing and probability analysis where the lamp is used 3 hours per day, 7 days a week.

\* Note: Data is subject to change without prior notice. Please visit [www.civilight-na.com](http://www.civilight-na.com) for further information.

## Cautions

- Power off before replacing
- Don't touch lamp when lit



**CIVILIGHT NORTH AMERICA CORP**

Address: 522 Buxton Grant Drive, Cary, NC 27519  
TEL: 919-234-0853 / WEB: [www.civilight-na.com](http://www.civilight-na.com)