

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.1569	-58.5	5.828	-27.0	19.83	4.5	18.44	36.0	35.39	67.5	34.91
-88.5	0.2616	-57.0	6.568	-25.5	19.76	6.0	18.94	37.5	36.30	69.0	33.81
-87.0	0.3492	-55.5	7.151	-24.0	19.64	7.5	19.06	39.0	37.06	70.5	32.88
-85.5	0.4013	-54.0	7.832	-22.5	19.45	9.0	19.39	40.5	37.47	72.0	32.01
-84.0	0.4543	-52.5	8.531	-21.0	19.16	10.5	19.92	42.0	37.99	73.5	32.77
-82.5	0.5055	-51.0	9.324	-19.5	18.87	12.0	20.66	43.5	38.46	75.0	32.18
-81.0	0.5229	-49.5	10.12	-18.0	18.44	13.5	21.87	45.0	38.53	76.5	33.20
-79.5	0.5752	-48.0	10.98	-16.5	17.89	15.0	23.07	46.5	39.16	78.0	31.33
-78.0	0.6112	-46.5	11.77	-15.0	17.40	16.5	23.54	48.0	39.01	79.5	29.56
-76.5	0.7321	-45.0	12.57	-13.5	16.94	18.0	23.49	49.5	38.82	81.0	27.46
-75.0	0.8420	-43.5	13.37	-12.0	16.46	19.5	23.90	51.0	38.72	82.5	26.29
-73.5	0.9994	-42.0	14.21	-10.5	16.12	21.0	24.81	52.5	38.17	84.0	26.17
-72.0	1.342	-40.5	15.02	-9.0	15.95	22.5	25.71	54.0	36.99	85.5	25.89
-70.5	1.753	-39.0	15.76	-7.5	15.94	24.0	26.49	55.5	35.82	87.0	26.90
-69.0	2.137	-37.5	16.52	-6.0	16.02	25.5	27.69	57.0	34.46	88.5	27.95
-67.5	2.525	-36.0	17.34	-4.5	16.15	27.0	29.01	58.5	34.00	90.0	30.56
-66.0	3.034	-34.5	18.07	-3.0	16.37	28.5	30.00	60.0	34.06		
-64.5	3.567	-33.0	18.70	-1.5	16.66	30.0	30.84	61.5	34.55		
-63.0	4.187	-31.5	19.27	0.0	16.94	31.5	31.89	63.0	35.87		
-61.5	4.659	-30.0	19.63	1.5	17.26	33.0	33.21	64.5	36.26		
-60.0	5.173	-28.5	19.80	3.0	17.79	34.5	34.28	66.0	35.49		

Electricity Parameter:

Current I: 0.0350A Power: 3.039W
Voltage V: 121.0V PF: 0.702


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 140.0deg @ (50%): 120.1deg @ (75%): 62.4deg @ (50%): 120.1deg
Diffuse angle: @ (25%): 152.8deg @ (50%): 142.6deg @ (75%): 134.7deg @ (50%): 142.6deg
Imax=39.22cd (C=0.0deg,G=47.0deg) C0-180Plane Imax= 39.22cd(G=47.0deg)
C0-180Plane I0= 16.94cd

Lamp Type:DB11 KF25Q3
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-08-11
Humidity:65%
Remarks:

Average Illuminance Figure

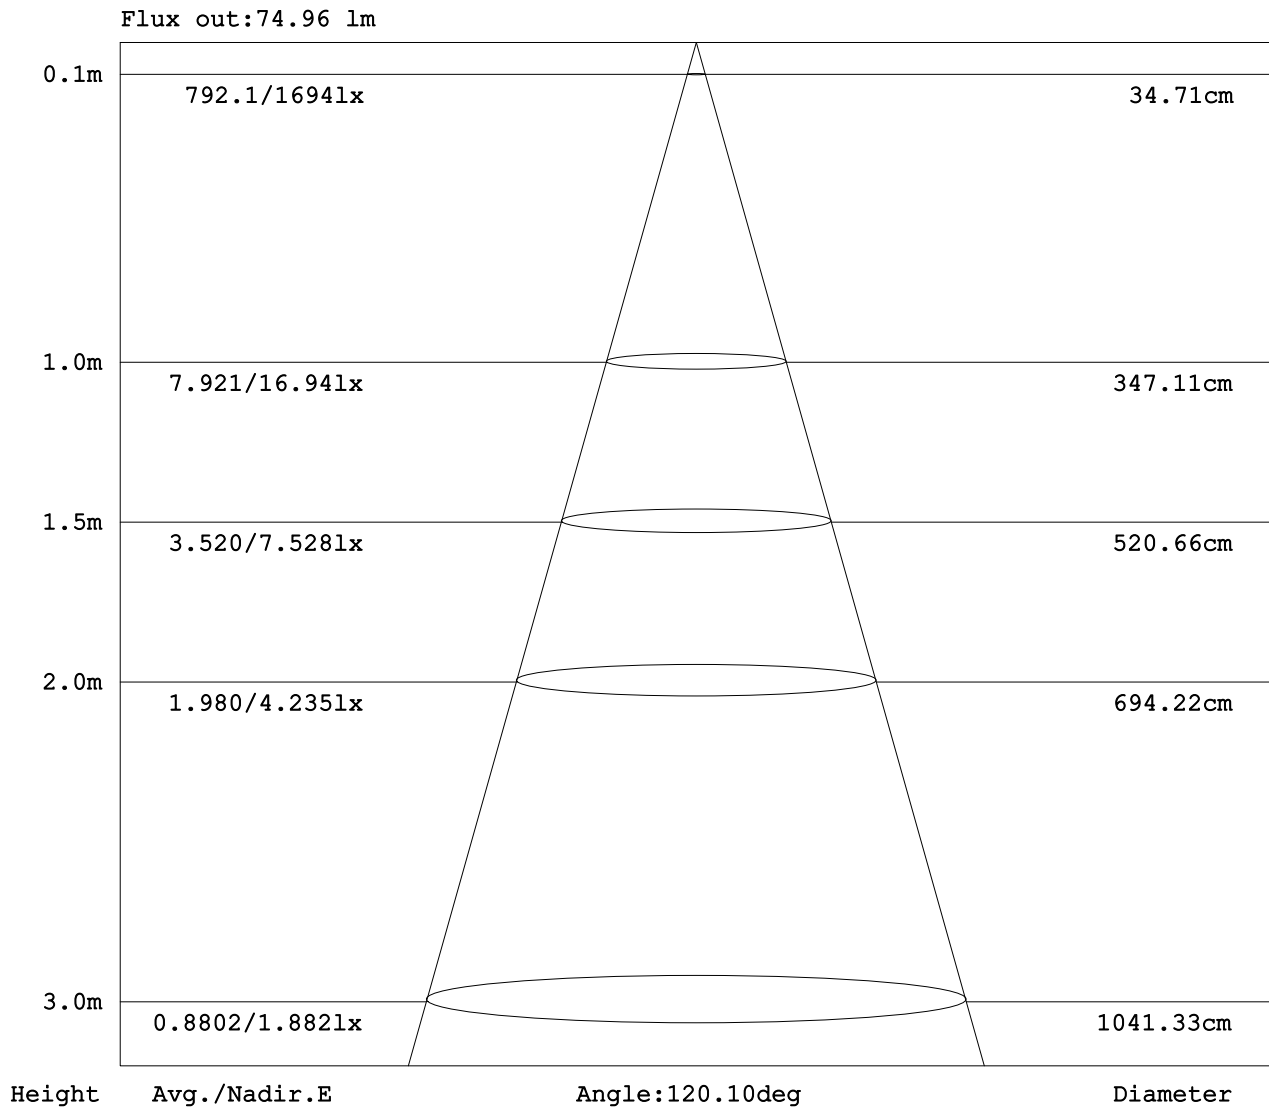

Lamp Type:DB11 KF25Q3
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-08-11
 Humidity:65%
 Remarks: