

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.5404	-58.0	20.89	-26.0	100.4	6.0	2887	38.0	33.99	70.0	11.27
-88.0	1.619	-56.0	22.09	-24.0	133.2	8.0	2180	40.0	31.95	72.0	9.916
-86.0	2.890	-54.0	23.09	-22.0	190.9	10.0	1650	42.0	30.32	74.0	8.815
-84.0	4.282	-52.0	24.03	-20.0	318.3	12.0	1223	44.0	28.66	76.0	7.896
-82.0	5.866	-50.0	25.46	-18.0	552.4	14.0	862.4	46.0	26.60	78.0	6.498
-80.0	7.416	-48.0	27.26	-16.0	908.4	16.0	476.7	48.0	24.70	80.0	4.897
-78.0	8.639	-46.0	29.12	-14.0	1293	18.0	254.4	50.0	23.40	82.0	3.434
-76.0	9.648	-44.0	32.09	-12.0	1762	20.0	163.6	52.0	22.38	84.0	2.172
-74.0	10.93	-42.0	33.63	-10.0	2313	22.0	115.9	54.0	21.28	86.0	1.048
-72.0	12.44	-40.0	36.54	-8.0	3086	24.0	88.48	56.0	19.94	88.0	0.2111
-70.0	13.92	-38.0	39.98	-6.0	4088	26.0	71.44	58.0	18.76	90.0	0.0950
-68.0	15.30	-36.0	44.36	-4.0	5182	28.0	59.74	60.0	17.73		
-66.0	16.45	-34.0	49.55	-2.0	5796	30.0	51.17	62.0	16.57		
-64.0	17.81	-32.0	56.84	0.0	5776	32.0	45.00	64.0	15.29		
-62.0	18.94	-30.0	66.92	2.0	5055	34.0	40.21	66.0	14.06		
-60.0	19.82	-28.0	80.24	4.0	3962	36.0	36.67	68.0	12.74		

Electricity Parameter:

Current I: 0.1330A Power: 14.00W
Voltage V: 118.4V PF: 0.887


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 703.7lm$ Efficiency: $Eff=50.26lm/W$
Diffuse angle: @ (25%): 24.0deg @ (50%): 14.2deg @ (75%): 8.6deg @ (50%): 14.2deg
Diffuse angle: @ (25%): 24.0deg @ (50%): 14.3deg @ (75%): 8.8deg @ (50%): 14.3deg
Imax=5851cd (C=0.0deg, G=-1.0deg) C0-180Plane Imax= 5851cd(G=-1.0deg)
C0-180Plane I0= 5776cd

Lamp Type: 低压V-LED DPAR30
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-02-19
Humidity: 65%
Remarks:

Average Illuminance Figure

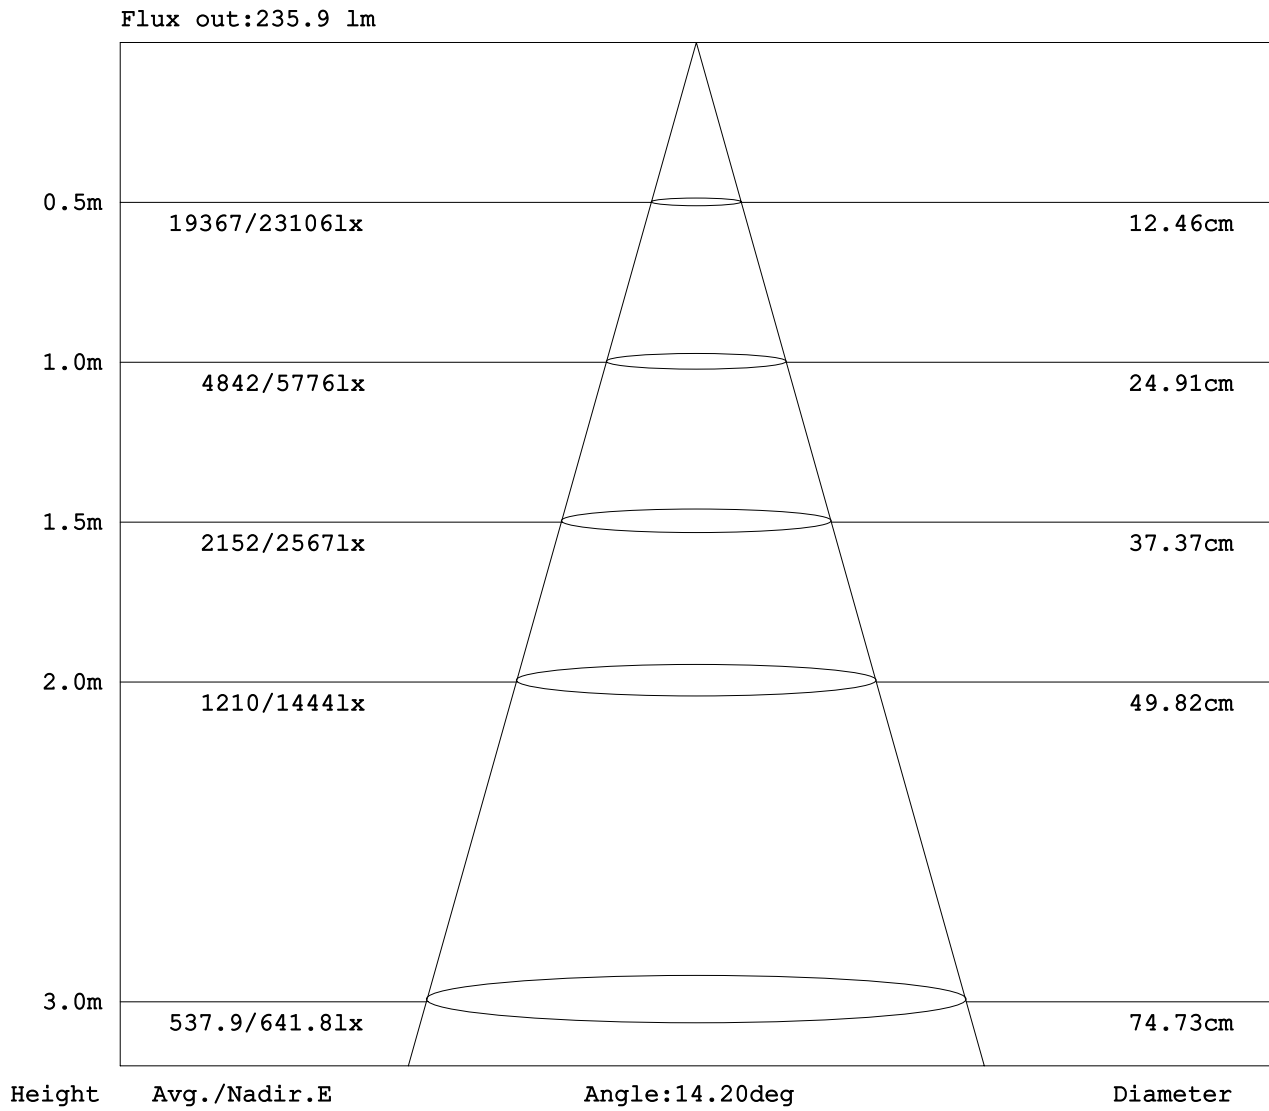

Lamp Type: 低压V-LED DPAR30
 Tester:
 Temperature: 25.3deg
 Manufactory: CIVILIGHT

Luminaires Type:
 Test Date: 2014-02-19
 Humidity: 65%
 Remarks: