

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.2092	-58.5	19.90	-27.0	78.23	4.5	3026	36.0	39.64	67.5	13.20
-88.5	0.9960	-57.0	20.67	-25.5	98.29	6.0	2819	37.5	37.07	69.0	12.08
-87.0	1.781	-55.5	21.43	-24.0	133.4	7.5	2611	39.0	34.80	70.5	10.98
-85.5	2.551	-54.0	22.17	-22.5	194.4	9.0	2375	40.5	32.78	72.0	9.984
-84.0	3.372	-52.5	22.82	-21.0	287.9	10.5	2090	42.0	31.04	73.5	8.981
-82.5	4.177	-51.0	23.59	-19.5	415.6	12.0	1756	43.5	29.54	75.0	7.971
-81.0	5.192	-49.5	24.48	-18.0	594.5	13.5	1399	45.0	28.23	76.5	7.515
-79.5	6.230	-48.0	25.31	-16.5	822.4	15.0	1062	46.5	26.97	78.0	6.500
-78.0	7.394	-46.5	26.39	-15.0	1109	16.5	779.7	48.0	26.00	79.5	5.421
-76.5	7.722	-45.0	27.53	-13.5	1449	18.0	549.4	49.5	25.01	81.0	4.335
-75.0	8.637	-43.5	28.86	-12.0	1814	19.5	360.8	51.0	24.22	82.5	3.501
-73.5	9.629	-42.0	30.39	-10.5	2158	21.0	237.9	52.5	23.34	84.0	2.702
-72.0	10.59	-40.5	32.22	-9.0	2452	22.5	159.1	54.0	22.60	85.5	1.894
-70.5	11.59	-39.0	34.26	-7.5	2688	24.0	113.1	55.5	21.83	87.0	1.100
-69.0	12.63	-37.5	36.63	-6.0	2895	25.5	87.34	57.0	20.90	88.5	0.2578
-67.5	13.88	-36.0	39.45	-4.5	3107	27.0	72.21	58.5	20.00	90.0	0.0714
-66.0	14.94	-34.5	42.71	-3.0	3322	28.5	62.58	60.0	19.00		
-64.5	16.11	-33.0	46.92	-1.5	3486	30.0	55.94	61.5	18.02		
-63.0	17.06	-31.5	51.71	0.0	3527	31.5	50.59	63.0	16.80		
-61.5	18.18	-30.0	57.73	1.5	3428	33.0	46.23	64.5	15.65		
-60.0	19.02	-28.5	65.88	3.0	3239	34.5	42.65	66.0	14.48		

Electricity Parameter:

Current I: 0.1240A Power: 13.93W
Voltage V: 123.0V PF: 0.910


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 714.9lm$ Efficiency: $Eff=51.30lm/W$
Diffuse angle: @ (25%): 32.0deg @ (50%): 24.1deg @ (75%): 14.9deg @ (50%): 24.1deg
Diffuse angle: @ (25%): 32.0deg @ (50%): 24.1deg @ (75%): 14.9deg @ (50%): 24.1deg
 $I_{max}=3530cd$ (C=0.0deg,G=-0.5deg) C0-180Plane $I_{max}= 3530cd$ (G=-0.5deg)
C0-180Plane $I_{0}= 3527cd$

Lamp Type: 低压V-LED DPAR30
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2013-11-28
Humidity: 65%
Remarks:

Average Illuminance Figure

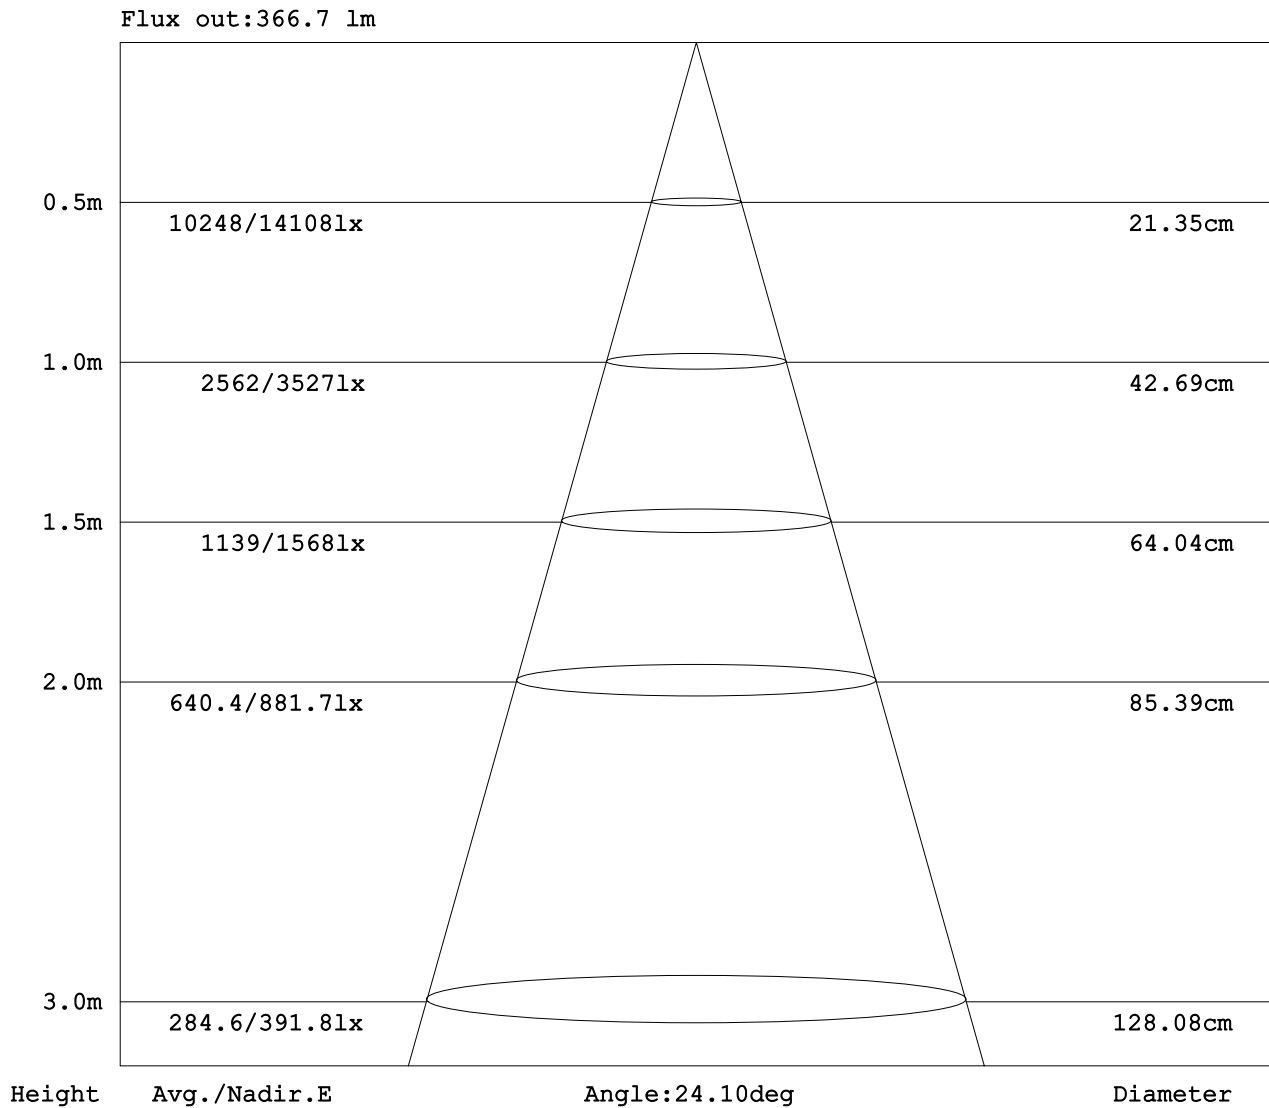

Lamp Type: 低压V-LED DPAR30
 Tester:
 Temperature:25.3deg
 Manufactory:CIVILIGHT

Luminaires Type:
 Test Date:2013-11-28
 Humidity:65%
 Remarks: