

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.2092	-58.5	22.08	-27.0	74.64	4.5	5018	36.0	39.80	67.5	13.40
-88.5	1.047	-57.0	23.02	-25.5	90.20	6.0	3962	37.5	37.11	69.0	12.24
-87.0	1.904	-55.5	23.94	-24.0	115.9	7.5	3152	39.0	34.90	70.5	11.08
-85.5	2.760	-54.0	24.65	-22.5	156.6	9.0	2560	40.5	32.96	72.0	9.931
-84.0	3.688	-52.5	25.25	-21.0	226.6	10.5	2066	42.0	31.27	73.5	8.954
-82.5	4.862	-51.0	25.93	-19.5	359.1	12.0	1632	43.5	29.84	75.0	8.748
-81.0	6.171	-49.5	26.74	-18.0	619.3	13.5	1250	45.0	28.67	76.5	7.817
-79.5	7.339	-48.0	27.74	-16.5	973.1	15.0	891.2	46.5	27.55	78.0	6.736
-78.0	8.372	-46.5	28.69	-15.0	1351	16.5	565.7	48.0	26.67	79.5	5.449
-76.5	8.864	-45.0	30.28	-13.5	1742	18.0	316.3	49.5	26.02	81.0	4.153
-75.0	9.664	-43.5	32.50	-12.0	2193	19.5	198.3	51.0	25.43	82.5	3.100
-73.5	10.73	-42.0	34.73	-10.5	2730	21.0	140.4	52.5	24.58	84.0	2.249
-72.0	11.96	-40.5	36.60	-9.0	3406	22.5	107.1	54.0	23.46	85.5	1.364
-70.5	13.21	-39.0	39.12	-7.5	4279	24.0	85.72	55.5	22.31	87.0	0.5350
-69.0	14.43	-37.5	41.37	-6.0	5379	25.5	72.64	57.0	21.24	88.5	0.0541
-67.5	15.55	-36.0	43.96	-4.5	6517	27.0	64.58	58.5	20.25	90.0	0.0017
-66.0	16.76	-34.5	46.72	-3.0	7438	28.5	59.00	60.0	19.21		
-64.5	17.86	-33.0	50.57	-1.5	7926	30.0	53.69	61.5	17.94		
-63.0	19.02	-31.5	54.93	0.0	7841	31.5	49.02	63.0	16.78		
-61.5	19.99	-30.0	59.04	1.5	7205	33.0	45.44	64.5	15.53		
-60.0	21.04	-28.5	65.04	3.0	6170	34.5	42.48	66.0	14.45		

Electricity Parameter:

Current I: 0.0A Power: 0.0W
Voltage V: 120.0V PF: 0.000


Optical Parameter (Distance=2.900m) :

Diffuse angle: @(25%): 23.3deg @(50%): 13.8deg @(75%): 8.4deg @50%: 13.8deg
Diffuse angle: @(25%): 23.5deg @(50%): 14.0deg @(75%): 8.6deg @50%: 14.0deg
Imax=7974cd (C=0.0deg,G=-1.0deg) C0-180Plane Imax= 7974cd(G=-1.0deg)
C0-180Plane I0= 7841cd

Lamp Type:DPAR30L NP01Q14
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-07-30
Humidity:65%
Remarks:

Average Illuminance Figure

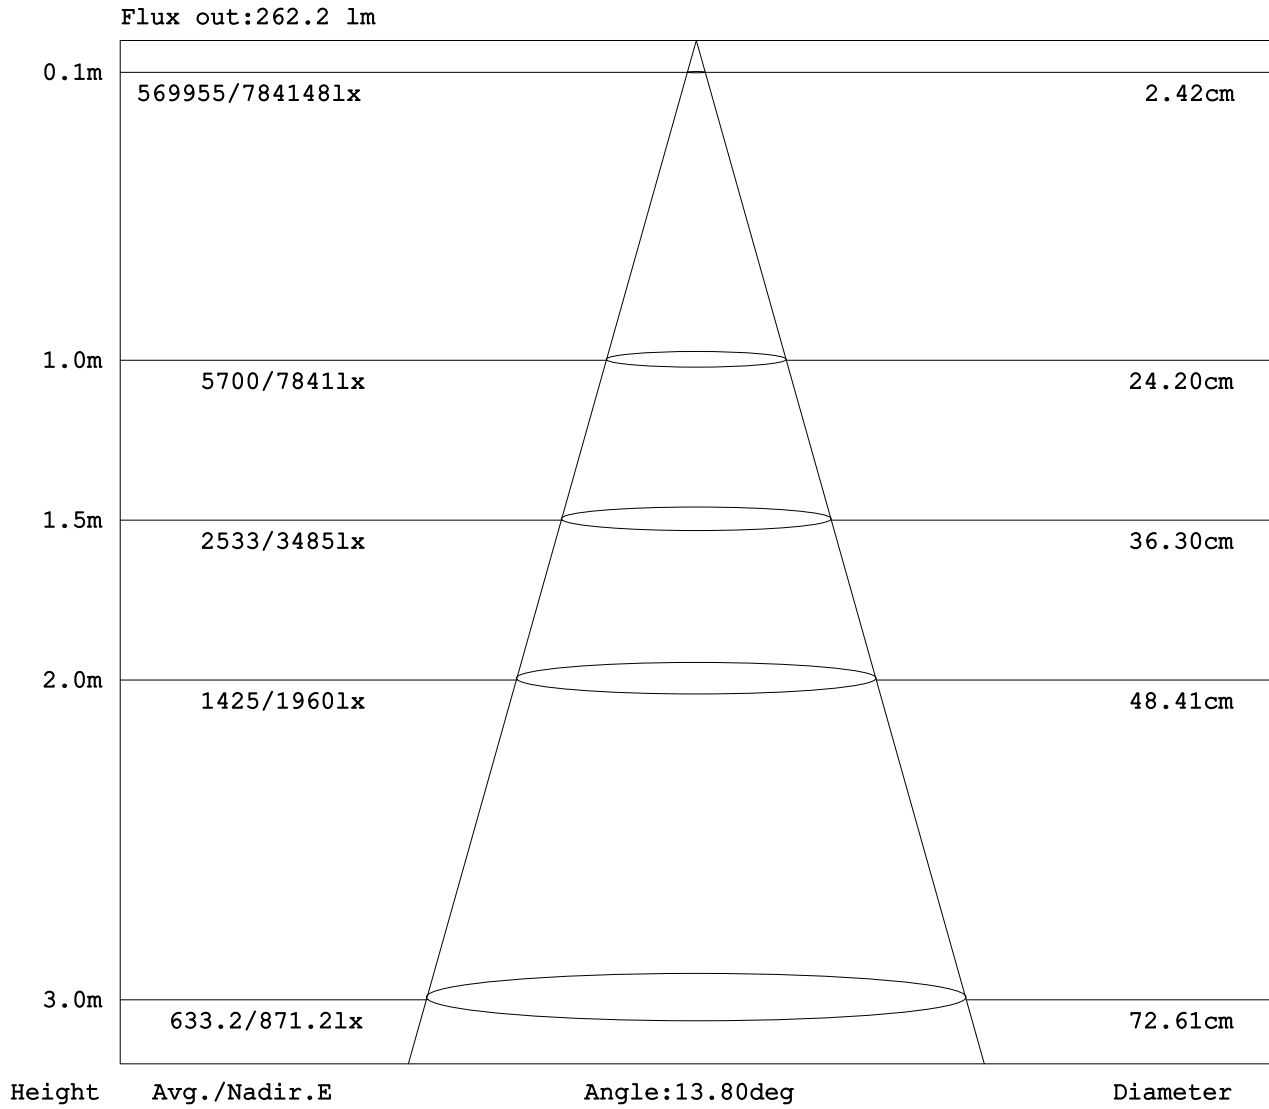

Lamp Type:DPAR30L NP01Q14
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-07-30
 Humidity:65%
 Remarks: