

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.1569	-58.5	24.34	-27.0	87.63	4.5	3529	36.0	42.80	67.5	14.82
-88.5	0.9961	-57.0	25.53	-25.5	114.1	6.0	3263	37.5	40.23	69.0	13.59
-87.0	1.957	-55.5	26.68	-24.0	166.2	7.5	3003	39.0	38.06	70.5	12.41
-85.5	2.988	-54.0	27.81	-22.5	261.1	9.0	2720	40.5	36.15	72.0	11.22
-84.0	4.001	-52.5	28.88	-21.0	407.4	10.5	2375	42.0	34.47	73.5	10.01
-82.5	5.138	-51.0	29.89	-19.5	628.2	12.0	1967	43.5	32.93	75.0	8.820
-81.0	6.330	-49.5	30.92	-18.0	907.1	13.5	1541	45.0	31.54	76.5	8.285
-79.5	7.721	-48.0	32.12	-16.5	1240	15.0	1156	46.5	30.26	78.0	7.065
-78.0	8.316	-46.5	33.42	-15.0	1630	16.5	835.7	48.0	29.20	79.5	5.606
-76.5	9.385	-45.0	34.84	-13.5	2059	18.0	570.6	49.5	28.22	81.0	4.427
-75.0	10.47	-43.5	36.25	-12.0	2475	19.5	358.2	51.0	27.28	82.5	3.409
-73.5	11.64	-42.0	37.68	-10.5	2821	21.0	230.6	52.5	26.37	84.0	2.413
-72.0	12.86	-40.5	39.12	-9.0	3093	22.5	154.8	54.0	25.44	85.5	1.366
-70.5	14.12	-39.0	40.64	-7.5	3345	24.0	112.6	55.5	24.45	87.0	0.4653
-69.0	15.49	-37.5	42.56	-6.0	3623	25.5	89.26	57.0	23.51	88.5	0.0872
-67.5	16.87	-36.0	45.01	-4.5	3938	27.0	75.31	58.5	22.58	90.0	0.0872
-66.0	18.28	-34.5	48.11	-3.0	4251	28.5	66.03	60.0	21.48		
-64.5	19.61	-33.0	51.88	-1.5	4441	30.0	59.28	61.5	20.15		
-63.0	20.95	-31.5	56.70	0.0	4408	31.5	53.92	63.0	18.82		
-61.5	22.13	-30.0	63.21	1.5	4165	33.0	49.55	64.5	17.49		
-60.0	23.24	-28.5	72.70	3.0	3832	34.5	45.86	66.0	16.13		

Electricity Parameter:

Current I: 0.0A Power: 0.0W
Voltage V: 120.0V PF: 0.000


Optical Parameter (Distance=2.900m) :

Diffuse angle: @(25%): 32.1deg @(50%): 23.9deg @(75%): 13.0deg @50%: 23.9deg
Diffuse angle: @(25%): 32.2deg @(50%): 24.0deg @(75%): 13.4deg @50%: 24.0deg
Imax=4456cd (C=0.0deg,G=-1.0deg) C0-180Plane Imax= 4456cd(G=-1.0deg)
C0-180Plane I0= 4408cd

Lamp Type:DPAR30L NP01Q14
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-07-30
Humidity:65%
Remarks:

Average Illuminance Figure

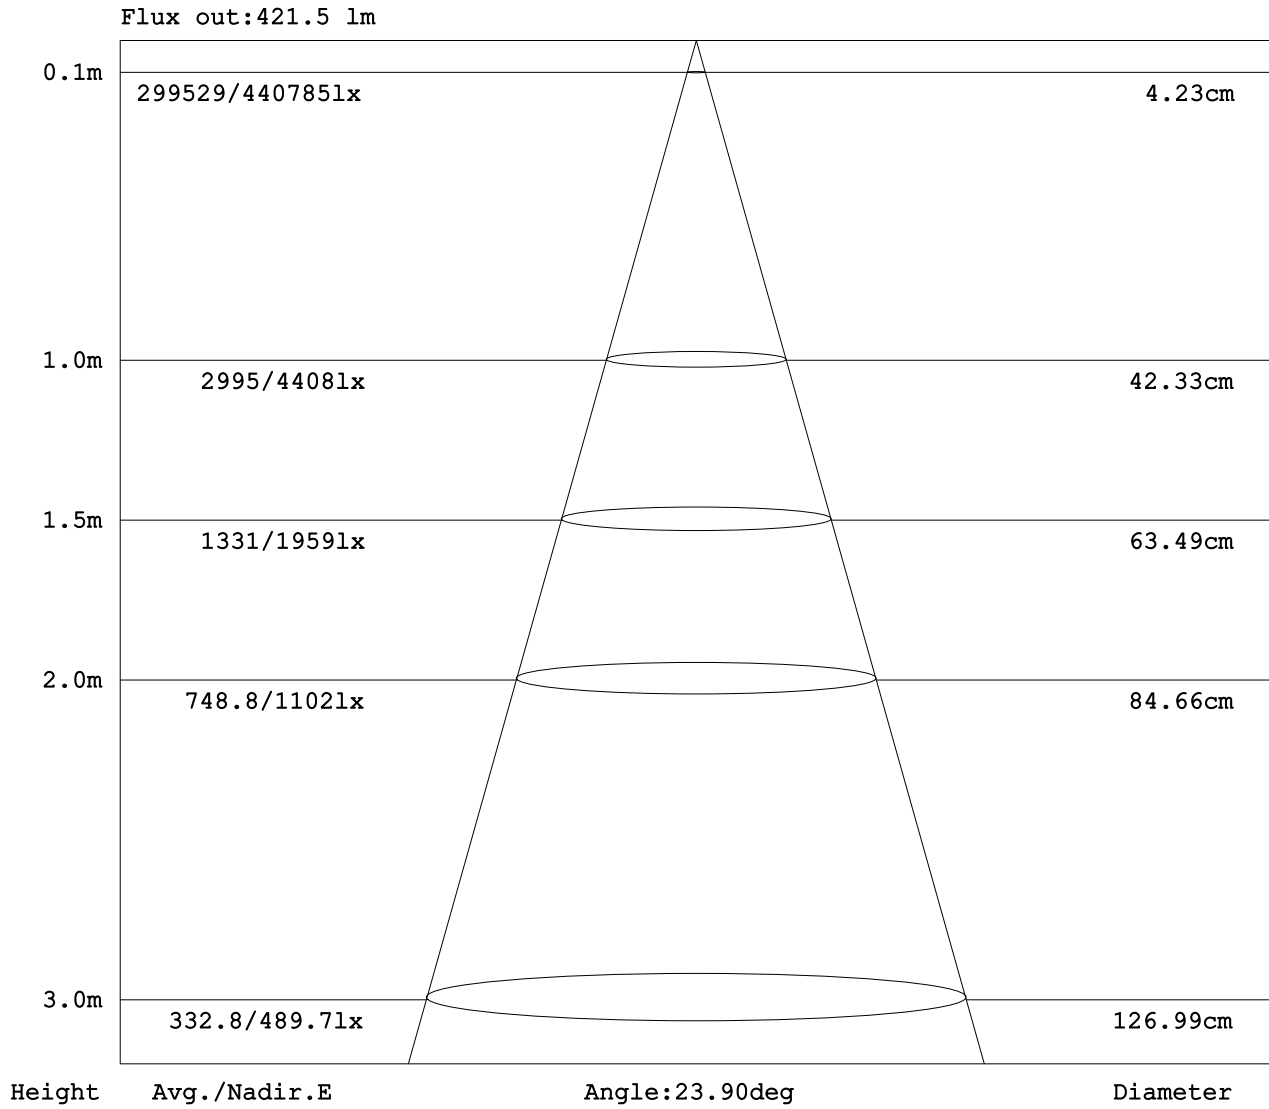

Lamp Type:DPAR30L NP01Q14
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-07-30
 Humidity:65%
 Remarks: