

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.3312	-58.5	25.80	-27.0	488.1	4.5	1518	36.0	109.4	67.5	13.19
-88.5	1.309	-57.0	28.05	-25.5	555.5	6.0	1475	37.5	92.36	69.0	12.22
-87.0	2.393	-55.5	30.55	-24.0	627.0	7.5	1429	39.0	79.51	70.5	11.34
-85.5	3.441	-54.0	33.33	-22.5	703.5	9.0	1374	40.5	69.22	72.0	10.41
-84.0	4.456	-52.5	36.51	-21.0	785.0	10.5	1301	42.0	60.94	73.5	9.666
-82.5	5.575	-51.0	40.14	-19.5	870.5	12.0	1209	43.5	54.03	75.0	8.778
-81.0	6.797	-49.5	44.42	-18.0	957.2	13.5	1102	45.0	48.26	76.5	7.837
-79.5	7.880	-48.0	49.52	-16.5	1050	15.0	998.7	46.5	43.28	78.0	6.669
-78.0	8.768	-46.5	55.47	-15.0	1151	16.5	904.0	48.0	39.15	79.5	5.476
-76.5	9.693	-45.0	62.39	-13.5	1245	18.0	812.9	49.5	35.61	81.0	4.390
-75.0	10.58	-43.5	70.65	-12.0	1323	19.5	727.2	51.0	32.51	82.5	3.326
-73.5	11.54	-42.0	80.88	-10.5	1383	21.0	647.1	52.5	29.75	84.0	2.275
-72.0	12.51	-40.5	93.50	-9.0	1434	22.5	573.5	54.0	27.34	85.5	1.463
-70.5	13.63	-39.0	110.0	-7.5	1480	24.0	499.1	55.5	25.17	87.0	0.7462
-69.0	14.68	-37.5	132.1	-6.0	1523	25.5	428.1	57.0	23.15	88.5	0.1440
-67.5	15.84	-36.0	161.7	-4.5	1566	27.0	364.5	58.5	21.32	90.0	0.0540
-66.0	17.15	-34.5	200.1	-3.0	1604	28.5	304.6	60.0	19.53		
-64.5	18.55	-33.0	246.8	-1.5	1627	30.0	249.5	61.5	18.01		
-63.0	20.15	-31.5	295.4	0.0	1624	31.5	201.7	63.0	16.62		
-61.5	21.94	-30.0	355.8	1.5	1599	33.0	162.3	64.5	15.40		
-60.0	23.76	-28.5	421.2	3.0	1559	34.5	132.1	66.0	14.26		

Electricity Parameter:

Current I: 0.0A Power: 0.0W
Voltage V: 228.0V PF: 0.000


Optical Parameter (Distance=2.900m) :

Diffuse angle: @(25%): 54.7deg @(50%): 38.3deg @(75%): 25.6deg @50%): 38.3deg
Diffuse angle: @(25%): 54.8deg @(50%): 38.5deg @(75%): 25.7deg @50%): 38.5deg
Imax=1629cd (C=0.0deg,G=-1.0deg) C0-180Plane Imax= 1629cd(G=-1.0deg)
C0-180Plane I0= 1624cd

Lamp Type:DPAR30L NP01Q14
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-07-30
Humidity:65%
Remarks:

Average Illuminance Figure

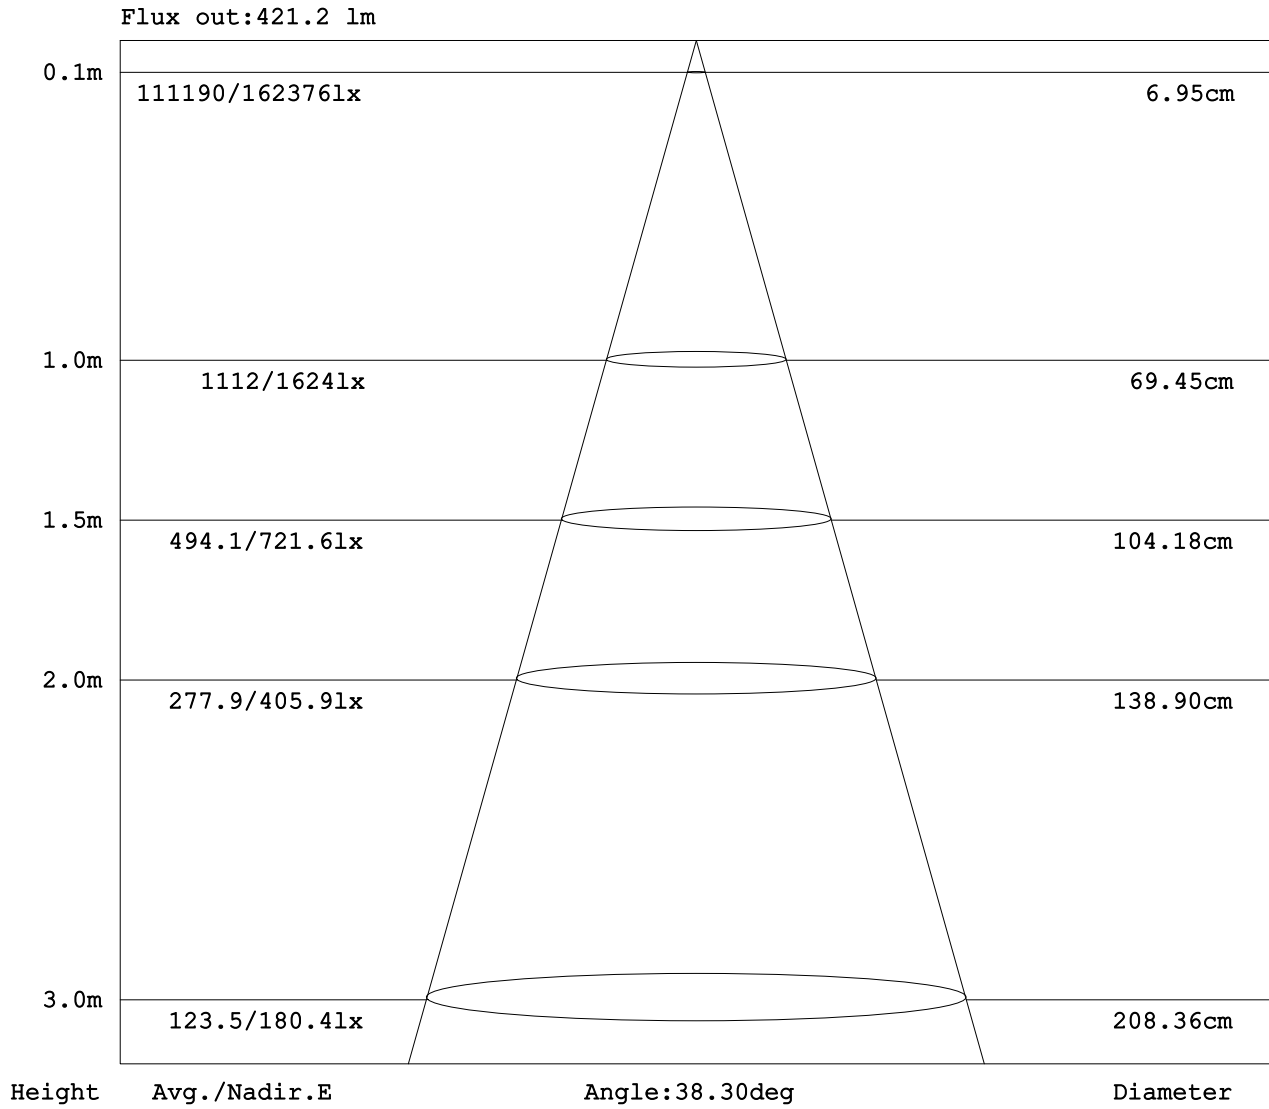

Lamp Type:DPAR30L NP01Q14
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-07-30
 Humidity:65%
 Remarks: