

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.4184	-58.0	22.94	-26.0	121.1	6.0	3274	38.0	37.44	70.0	11.59
-88.0	1.584	-56.0	24.37	-24.0	165.0	8.0	2465	40.0	34.74	72.0	10.13
-86.0	2.907	-54.0	25.78	-22.0	226.9	10.0	1858	42.0	32.59	74.0	8.997
-84.0	4.404	-52.0	27.22	-20.0	352.6	12.0	1368	44.0	30.77	76.0	8.447
-82.0	6.161	-50.0	28.66	-18.0	627.7	14.0	952.6	46.0	29.13	78.0	7.011
-80.0	7.747	-48.0	30.55	-16.0	1009	16.0	577.4	48.0	27.46	80.0	5.410
-78.0	8.797	-46.0	32.45	-14.0	1406	18.0	295.4	50.0	26.11	82.0	3.856
-76.0	9.577	-44.0	34.76	-12.0	1891	20.0	185.5	52.0	24.86	84.0	2.433
-74.0	10.94	-42.0	37.42	-10.0	2518	22.0	133.2	54.0	23.57	86.0	1.164
-72.0	12.68	-40.0	40.73	-8.0	3456	24.0	100.4	56.0	22.24	88.0	0.2363
-70.0	14.27	-38.0	44.79	-6.0	4659	26.0	81.12	58.0	20.99	90.0	0.0815
-68.0	15.74	-36.0	49.85	-4.0	5880	28.0	68.59	60.0	19.51		
-66.0	17.30	-34.0	56.59	-2.0	6558	30.0	59.65	62.0	17.96		
-64.0	18.75	-32.0	66.06	0.0	6451	32.0	50.81	64.0	16.30		
-62.0	20.09	-30.0	77.50	2.0	5628	34.0	44.91	66.0	14.76		
-60.0	21.43	-28.0	93.89	4.0	4400	36.0	40.75	68.0	13.22		

**Electricity Parameter:**

Current I: 0.1320A      Power: 13.87W  
Voltage V: 118.2V      PF: 0.887


**Optical Parameter (Distance=2.900m) :**

Equivalent Luminous flux:  $\Phi_{eff} = 787.4lm$       Efficiency:  $Eff=56.77lm/W$   
Diffuse angle:      @ (25%): 23.6deg   @ (50%): 14.1deg   @ (75%): 8.6deg   @ (50%): 14.1deg  
Diffuse angle:      @ (25%): 23.9deg   @ (50%): 14.5deg   @ (75%): 8.9deg   @ (50%): 14.5deg  
Imax=6598cd (C=0.0deg,G=-1.0deg)      C0-180Plane Imax= 6598cd(G=-1.0deg)  
C0-180Plane IO= 6451cd

Lamp Type: 低压V-LED DPAR30  
Tester:  
Temperature: 25.3deg  
Manufactory: EVERFINE

Luminaires Type:  
Test Date: 2014-02-19  
Humidity: 65%  
Remarks:

**Average Illuminance Figure**

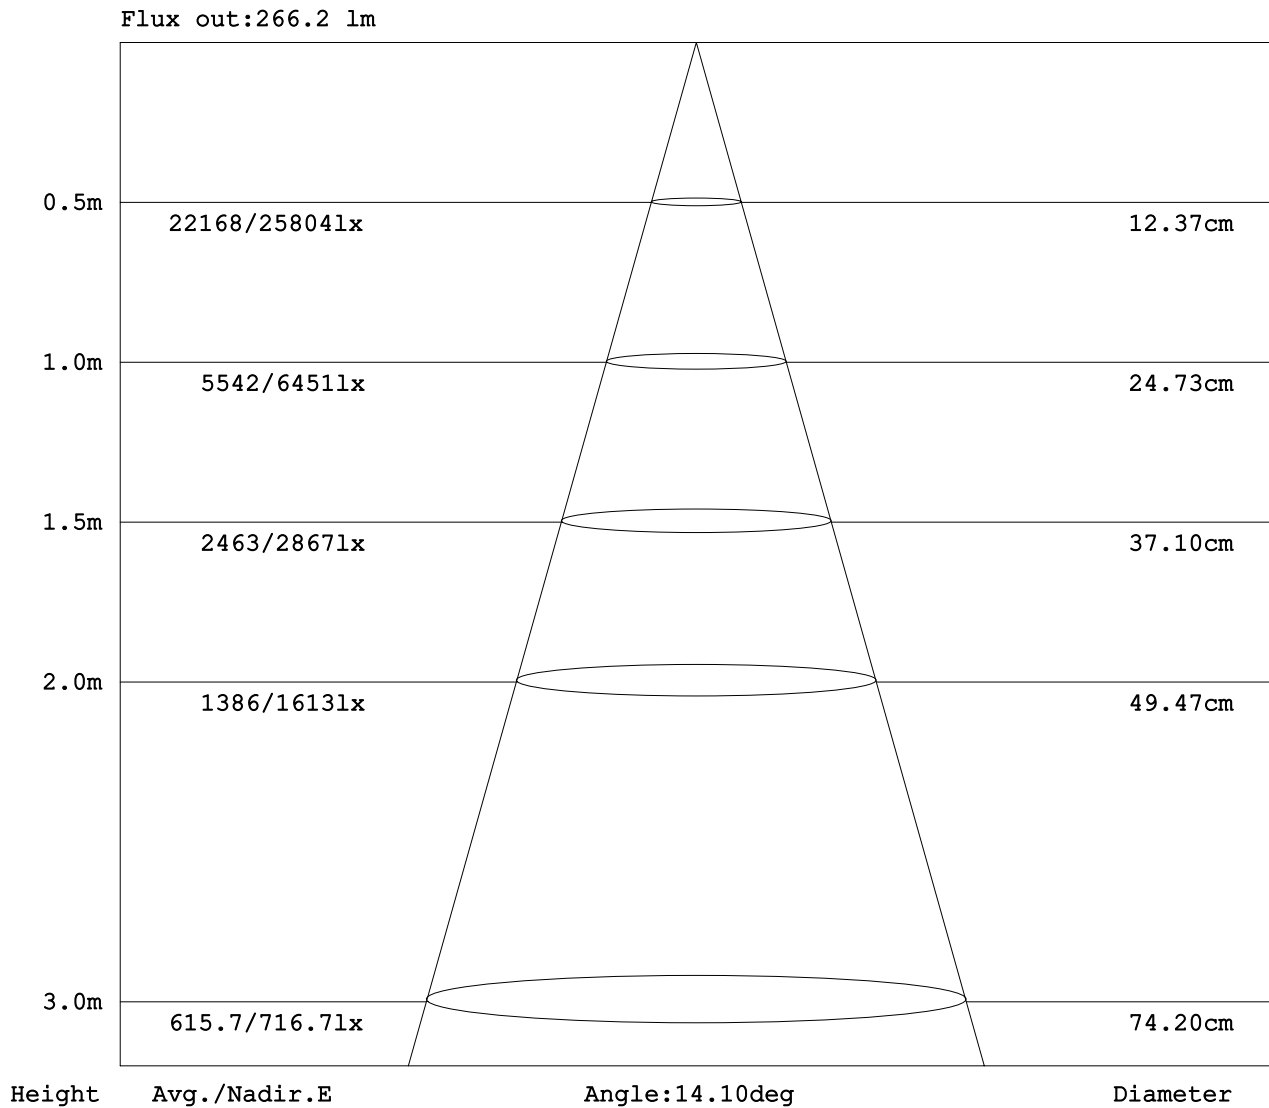

Lamp Type: 低压V-LED DPAR30  
 Tester:  
 Temperature:25.3deg  
 Manufactory:EVERFINE

Luminaires Type:  
 Test Date:2014-02-19  
 Humidity:65%  
 Remarks: