

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.2266	-58.0	21.62	-26.0	88.47	6.0	3186	38.0	37.36	70.0	12.53
-88.0	0.5744	-56.0	22.75	-24.0	125.9	8.0	2877	40.0	35.05	72.0	11.02
-86.0	1.670	-54.0	23.89	-22.0	200.1	10.0	2555	42.0	33.05	74.0	9.514
-84.0	2.819	-52.0	24.98	-20.0	340.6	12.0	2135	44.0	31.33	76.0	8.144
-82.0	3.985	-50.0	25.98	-18.0	568.6	14.0	1616	46.0	29.73	78.0	7.246
-80.0	5.238	-48.0	27.09	-16.0	886.4	16.0	1117	48.0	28.31	80.0	5.671
-78.0	6.889	-46.0	28.32	-14.0	1312	18.0	727.7	50.0	27.11	82.0	4.294
-76.0	7.701	-44.0	29.64	-12.0	1824	20.0	414.8	52.0	25.88	84.0	3.154
-74.0	8.981	-42.0	31.24	-10.0	2310	22.0	226.4	54.0	24.68	86.0	2.127
-72.0	10.44	-40.0	33.11	-8.0	2688	24.0	131.1	56.0	23.40	88.0	0.9800
-70.0	11.92	-38.0	35.41	-6.0	3001	26.0	88.72	58.0	22.15	90.0	0.0
-68.0	13.55	-36.0	38.43	-4.0	3331	28.0	68.67	60.0	20.86		
-66.0	15.31	-34.0	42.52	-2.0	3697	30.0	57.37	62.0	19.36		
-64.0	17.03	-32.0	48.41	0.0	3945	32.0	49.87	64.0	17.77		
-62.0	18.69	-30.0	56.55	2.0	3871	34.0	44.31	66.0	16.05		
-60.0	20.33	-28.0	68.60	4.0	3540	36.0	40.27	68.0	14.26		

Electricity Parameter:

Current I: 0.1260A Power: 13.63W
Voltage V: 121.5V PF: 0.889


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 781.6\text{lm}$ Efficiency: $Eff=57.31\text{lm/W}$
Diffuse angle: @ (25%): 32.0deg @ (50%): 24.0deg @ (75%): 13.6deg @ (50%): 24.0deg
Diffuse angle: @ (25%): 32.0deg @ (50%): 24.0deg @ (75%): 13.6deg @ (50%): 24.0deg
Imax=3951cd (C=0.0deg,G=1.0deg) C0-180Plane Imax= 3951cd(G=1.0deg)
C0-180Plane IO= 3945cd

Lamp Type: 低压V-LED DPAR30
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-01-07
Humidity: 65%
Remarks:

Average Illuminance Figure

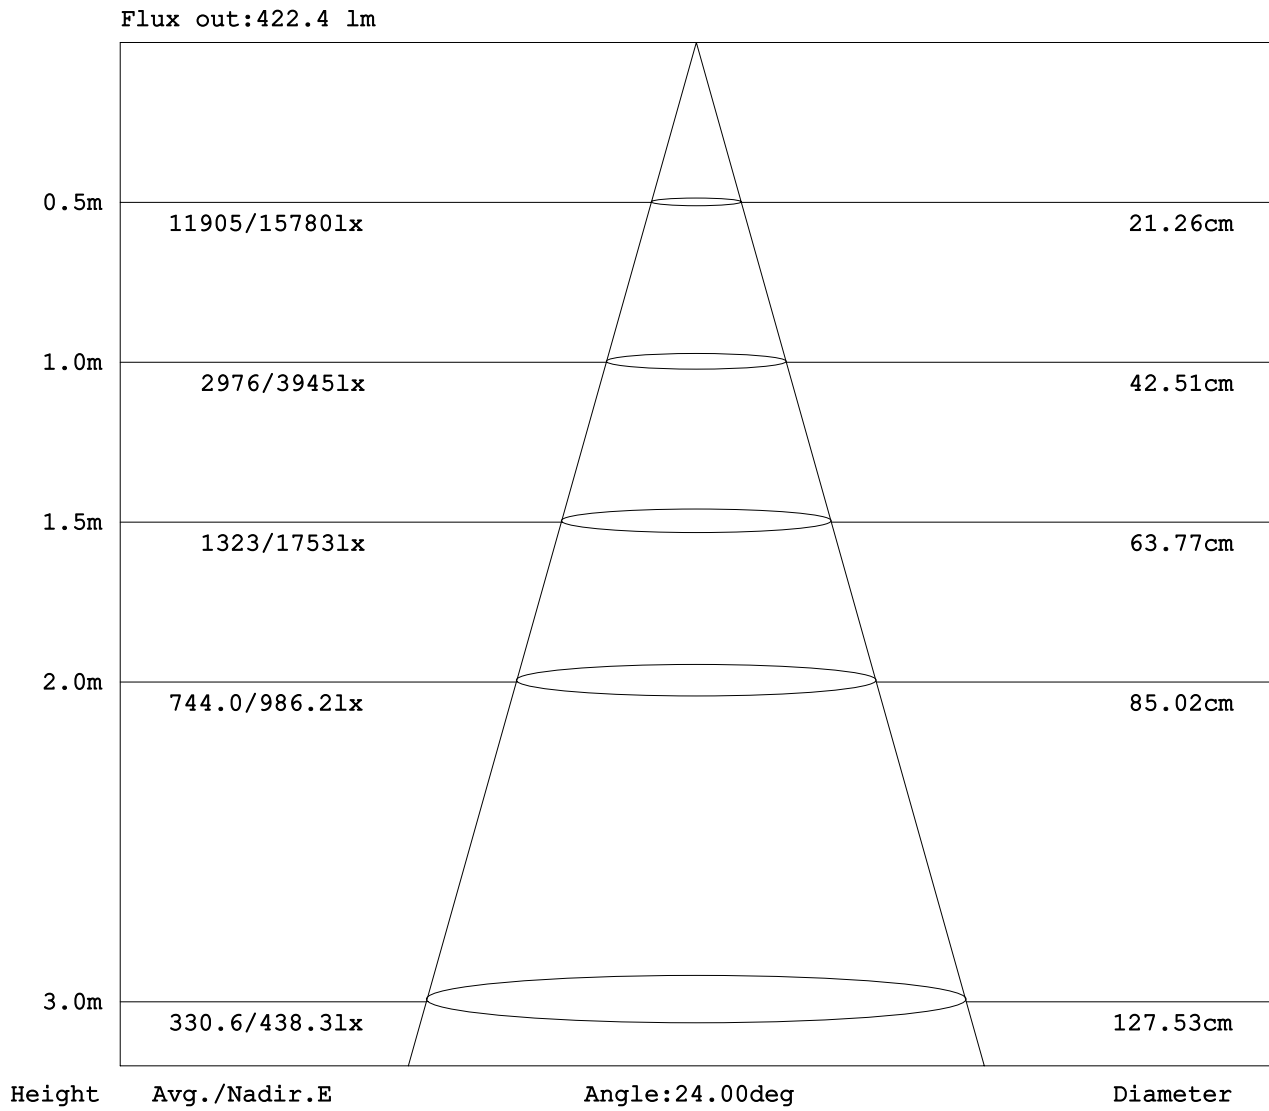

Lamp Type: 低压V-LED DPAR30
 Tester:
 Temperature: 25.3deg
 Manufactory: CIVILIGHT

Luminaires Type:
 Test Date: 2014-01-07
 Humidity: 65%
 Remarks: