

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1743	-58.5	19.53	-27.0	345.3	4.5	1440	36.0	127.0	67.5	13.39
-88.5	0.1928	-57.0	21.22	-25.5	405.8	6.0	1394	37.5	104.3	69.0	12.40
-87.0	0.8932	-55.5	23.01	-24.0	464.7	7.5	1349	39.0	87.71	70.5	11.50
-85.5	1.837	-54.0	25.03	-22.5	523.6	9.0	1303	40.5	75.40	72.0	10.62
-84.0	2.762	-52.5	27.22	-21.0	588.0	10.5	1252	42.0	65.70	73.5	9.854
-82.5	3.636	-51.0	29.57	-19.5	660.2	12.0	1189	43.5	57.85	75.0	9.042
-81.0	4.532	-49.5	32.34	-18.0	737.3	13.5	1111	45.0	51.19	76.5	8.337
-79.5	5.649	-48.0	35.52	-16.5	817.5	15.0	1016	46.5	45.61	78.0	7.524
-78.0	6.641	-46.5	39.24	-15.0	903.1	16.5	919.0	48.0	40.92	79.5	6.618
-76.5	7.513	-45.0	43.71	-13.5	998.7	18.0	832.4	49.5	36.97	81.0	5.578
-75.0	8.260	-43.5	48.99	-12.0	1096	19.5	752.7	51.0	33.59	82.5	4.542
-73.5	8.927	-42.0	55.28	-10.5	1179	21.0	675.2	52.5	30.73	84.0	3.613
-72.0	9.695	-40.5	62.92	-9.0	1245	22.5	602.1	54.0	28.19	85.5	2.700
-70.5	10.38	-39.0	72.29	-7.5	1297	24.0	537.3	55.5	25.84	87.0	1.797
-69.0	11.21	-37.5	84.47	-6.0	1342	25.5	469.9	57.0	23.79	88.5	0.9202
-67.5	12.04	-36.0	100.8	-4.5	1384	27.0	409.9	58.5	21.94	90.0	0.1459
-66.0	12.97	-34.5	123.2	-3.0	1429	28.5	351.4	60.0	20.16		
-64.5	14.04	-33.0	153.3	-1.5	1471	30.0	294.1	61.5	18.54		
-63.0	15.16	-31.5	191.6	0.0	1499	31.5	241.1	63.0	17.03		
-61.5	16.47	-30.0	238.3	1.5	1503	33.0	195.2	64.5	15.69		
-60.0	17.96	-28.5	287.0	3.0	1481	34.5	157.2	66.0	14.49		

Electricity Parameter:

Current I: 0.1300A Power: 13.62W
Voltage V: 117.1V PF: 0.890


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 775.3lm$ Efficiency: $Eff=56.90lm/W$
Diffuse angle: @ (25%): 54.0deg @ (50%): 37.2deg @ (75%): 24.6deg @ (50%): 37.2deg
Diffuse angle: @ (25%): 54.1deg @ (50%): 37.2deg @ (75%): 24.7deg @ (50%): 37.2deg
 $I_{max}=1504cd$ (C=0.0deg,G=1.0deg) C0-180Plane $I_{max}= 1504cd$ (G=1.0deg)
C0-180Plane $I_{0}= 1499cd$

Lamp Type: 低压V-LED DPAR30
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-06-03
Humidity: 65%
Remarks:

Average Illuminance Figure

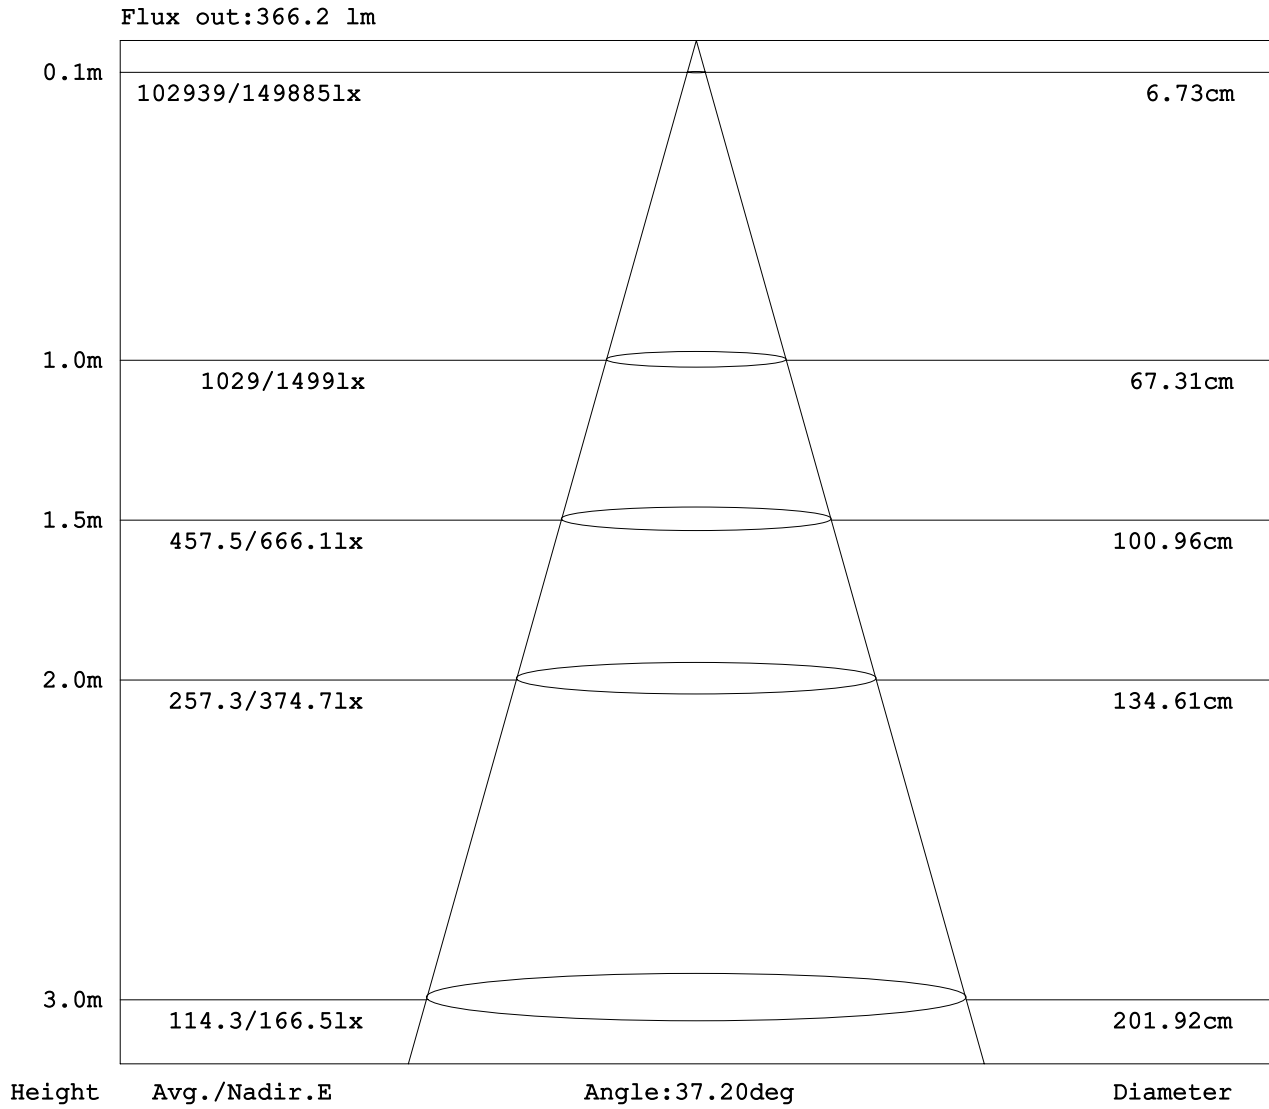

Lamp Type:低压V-LED DPAR30
Tester:
Temperature:25.3deg
Manufactory:CIVILIGHT

Luminaires Type:
Test Date:2014-06-03
Humidity:65%
Remarks: