

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.2092	-58.5	19.19	-27.0	74.96	4.5	3262	36.0	37.74	67.5	13.43
-88.5	0.8737	-57.0	19.91	-25.5	93.73	6.0	3034	37.5	35.39	69.0	12.27
-87.0	1.660	-55.5	20.65	-24.0	129.3	7.5	2834	39.0	33.37	70.5	11.24
-85.5	2.533	-54.0	21.24	-22.5	198.7	9.0	2614	40.5	31.60	72.0	10.20
-84.0	3.285	-52.5	21.86	-21.0	316.8	10.5	2338	42.0	30.04	73.5	9.168
-82.5	4.195	-51.0	22.47	-19.5	490.1	12.0	1985	43.5	28.67	75.0	8.162
-81.0	5.173	-49.5	23.17	-18.0	731.8	13.5	1578	45.0	27.36	76.5	7.262
-79.5	6.283	-48.0	24.05	-16.5	1019	15.0	1188	46.5	26.10	78.0	6.815
-78.0	7.287	-46.5	25.10	-15.0	1370	16.5	877.0	48.0	25.00	79.5	5.394
-76.5	7.814	-45.0	26.28	-13.5	1776	18.0	618.7	49.5	24.12	81.0	4.357
-75.0	8.758	-43.5	27.57	-12.0	2165	19.5	391.0	51.0	23.30	82.5	3.406
-73.5	9.789	-42.0	28.99	-10.5	2481	21.0	247.7	52.5	22.55	84.0	2.615
-72.0	10.69	-40.5	30.68	-9.0	2717	22.5	157.4	54.0	21.76	85.5	1.748
-70.5	11.62	-39.0	32.61	-7.5	2909	24.0	108.3	55.5	21.04	87.0	0.9534
-69.0	12.62	-37.5	34.83	-6.0	3119	25.5	82.87	57.0	20.30	88.5	0.2312
-67.5	13.80	-36.0	37.55	-4.5	3369	27.0	68.52	58.5	19.60	90.0	0.0714
-66.0	14.82	-34.5	40.79	-3.0	3668	28.5	59.50	60.0	18.84		
-64.5	15.83	-33.0	44.81	-1.5	3922	30.0	53.06	61.5	17.87		
-63.0	16.82	-31.5	49.67	0.0	3993	31.5	48.08	63.0	16.81		
-61.5	17.68	-30.0	55.66	1.5	3841	33.0	43.97	64.5	15.67		
-60.0	18.51	-28.5	63.57	3.0	3550	34.5	40.56	66.0	14.57		

Electricity Parameter:

Current I: 0.1000A Power: 11.94W
Voltage V: 120.2V PF: 0.990


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 786.7lm$ Efficiency: $Eff=65.88lm/W$
Diffuse angle: @ (25%): 32.4deg @ (50%): 24.5deg @ (75%): 13.0deg @ (50%): 24.5deg
Diffuse angle: @ (25%): 32.4deg @ (50%): 24.5deg @ (75%): 13.0deg @ (50%): 24.5deg
 $I_{max}=3993cd$ (C=0.0deg,G=0.0deg) C0-180Plane $I_{max}= 3993cd$ (G=0.0deg)
C0-180Plane $I_{0}= 3993cd$

Lamp Type: 低压V-LED DPAR30S
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-05-26
Humidity: 65%
Remarks:

Average Illuminance Figure

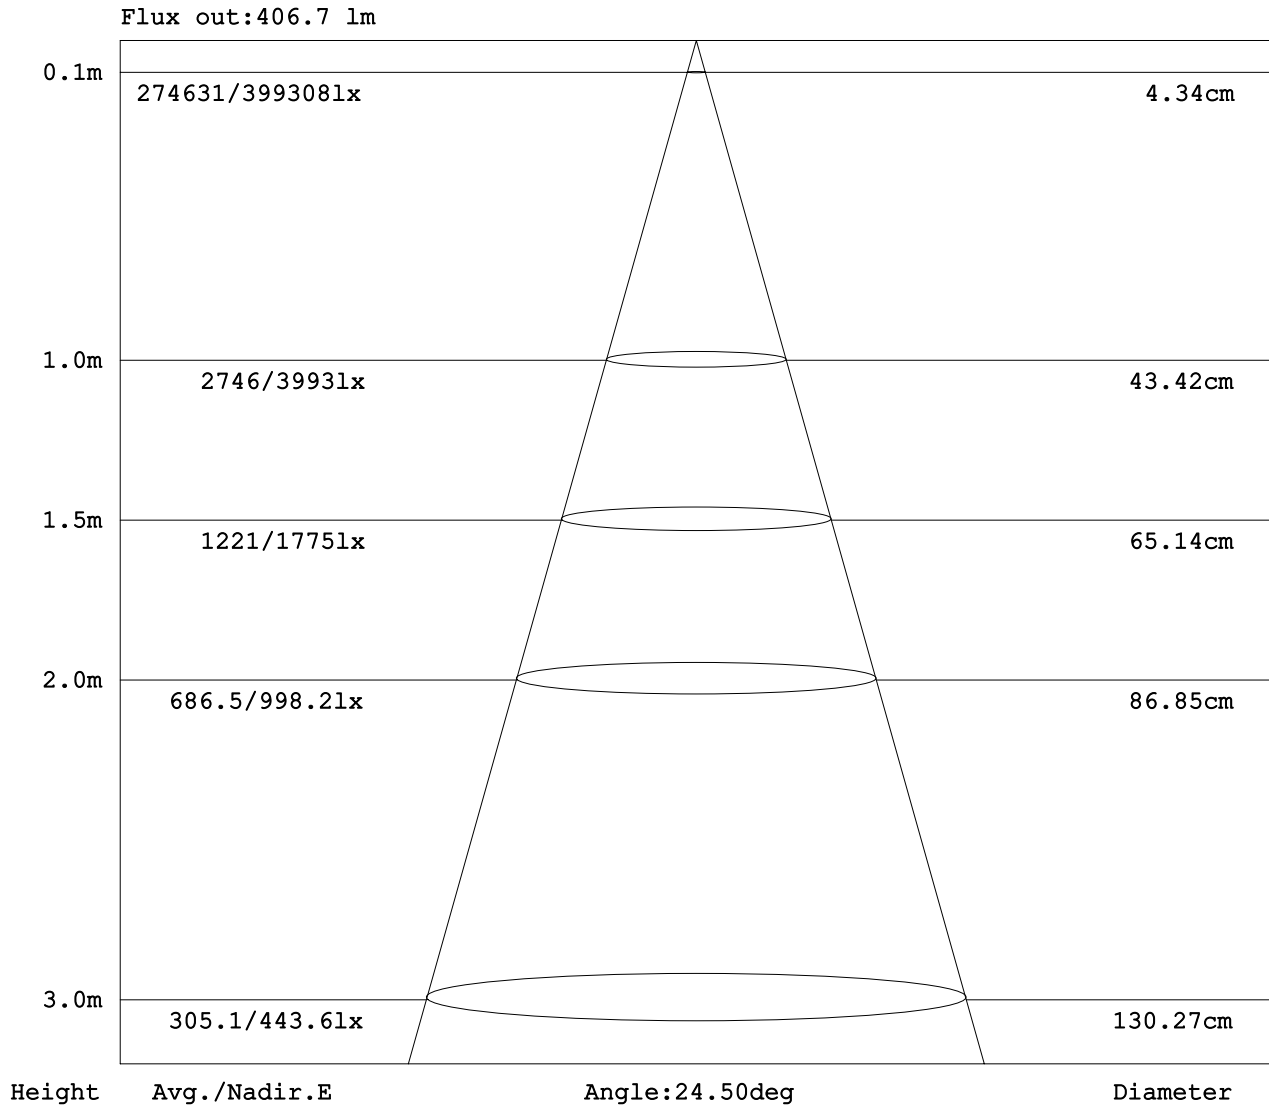

Lamp Type: 低压V-LED DPAR30S
 Tester:
 Temperature:25.3deg
 Manufactory:CIVILIGHT

Luminaires Type:
 Test Date:2014-05-26
 Humidity:65%
 Remarks: