

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1395	-58.5	17.27	-27.0	404.9	4.5	1454	36.0	113.5	67.5	11.21
-88.5	0.5772	-57.0	18.79	-25.5	470.3	6.0	1404	37.5	93.53	69.0	10.39
-87.0	1.381	-55.5	20.46	-24.0	536.5	7.5	1355	39.0	78.61	70.5	9.572
-85.5	2.202	-54.0	22.27	-22.5	606.8	9.0	1301	40.5	67.33	72.0	8.856
-84.0	3.005	-52.5	24.40	-21.0	684.5	10.5	1239	42.0	58.18	73.5	8.156
-82.5	3.742	-51.0	26.89	-19.5	765.2	12.0	1163	43.5	50.80	75.0	7.462
-81.0	4.599	-49.5	29.83	-18.0	846.7	13.5	1070	45.0	44.61	76.5	6.966
-79.5	5.540	-48.0	33.32	-16.5	928.0	15.0	971.0	46.5	39.49	78.0	6.255
-78.0	6.431	-46.5	37.49	-15.0	1018	16.5	886.4	48.0	35.20	79.5	5.376
-76.5	7.123	-45.0	42.53	-13.5	1118	18.0	810.2	49.5	31.53	81.0	4.372
-75.0	7.686	-43.5	48.64	-12.0	1205	19.5	735.7	51.0	28.45	82.5	3.474
-73.5	8.367	-42.0	56.22	-10.5	1273	21.0	659.2	52.5	25.85	84.0	2.715
-72.0	8.929	-40.5	65.55	-9.0	1325	22.5	589.5	54.0	23.61	85.5	1.800
-70.5	9.611	-39.0	77.51	-7.5	1372	24.0	523.3	55.5	21.61	87.0	0.9553
-69.0	10.25	-37.5	93.50	-6.0	1418	25.5	450.2	57.0	19.78	88.5	0.2312
-67.5	10.94	-36.0	115.1	-4.5	1466	27.0	386.5	58.5	18.17	90.0	0.0208
-66.0	11.76	-34.5	144.7	-3.0	1514	28.5	325.2	60.0	16.72		
-64.5	12.59	-33.0	183.5	-1.5	1551	30.0	268.7	61.5	15.34		
-63.0	13.60	-31.5	230.8	0.0	1566	31.5	218.1	63.0	14.10		
-61.5	14.65	-30.0	283.8	1.5	1550	33.0	174.9	64.5	13.05		
-60.0	15.89	-28.5	339.9	3.0	1508	34.5	140.1	66.0	12.09		

Electricity Parameter:

Current I: 0.1020A Power: 12.16W
Voltage V: 119.7V PF: 0.991


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 794.3lm$ Efficiency: $Eff=65.28lm/W$
Diffuse angle: @ (25%): 54.0deg @ (50%): 37.5deg @ (75%): 24.0deg @ (50%): 37.5deg
Diffuse angle: @ (25%): 54.1deg @ (50%): 37.6deg @ (75%): 24.2deg @ (50%): 37.6deg
 $I_{max}=1571cd$ (C=0.0deg,G=-0.5deg) C0-180Plane $I_{max}= 1571cd$ (G=-0.5deg)
C0-180Plane $I_{0}= 1566cd$

Lamp Type: 低压V-LED DPAR30S
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-05-26
Humidity: 65%
Remarks:

Average Illuminance Figure

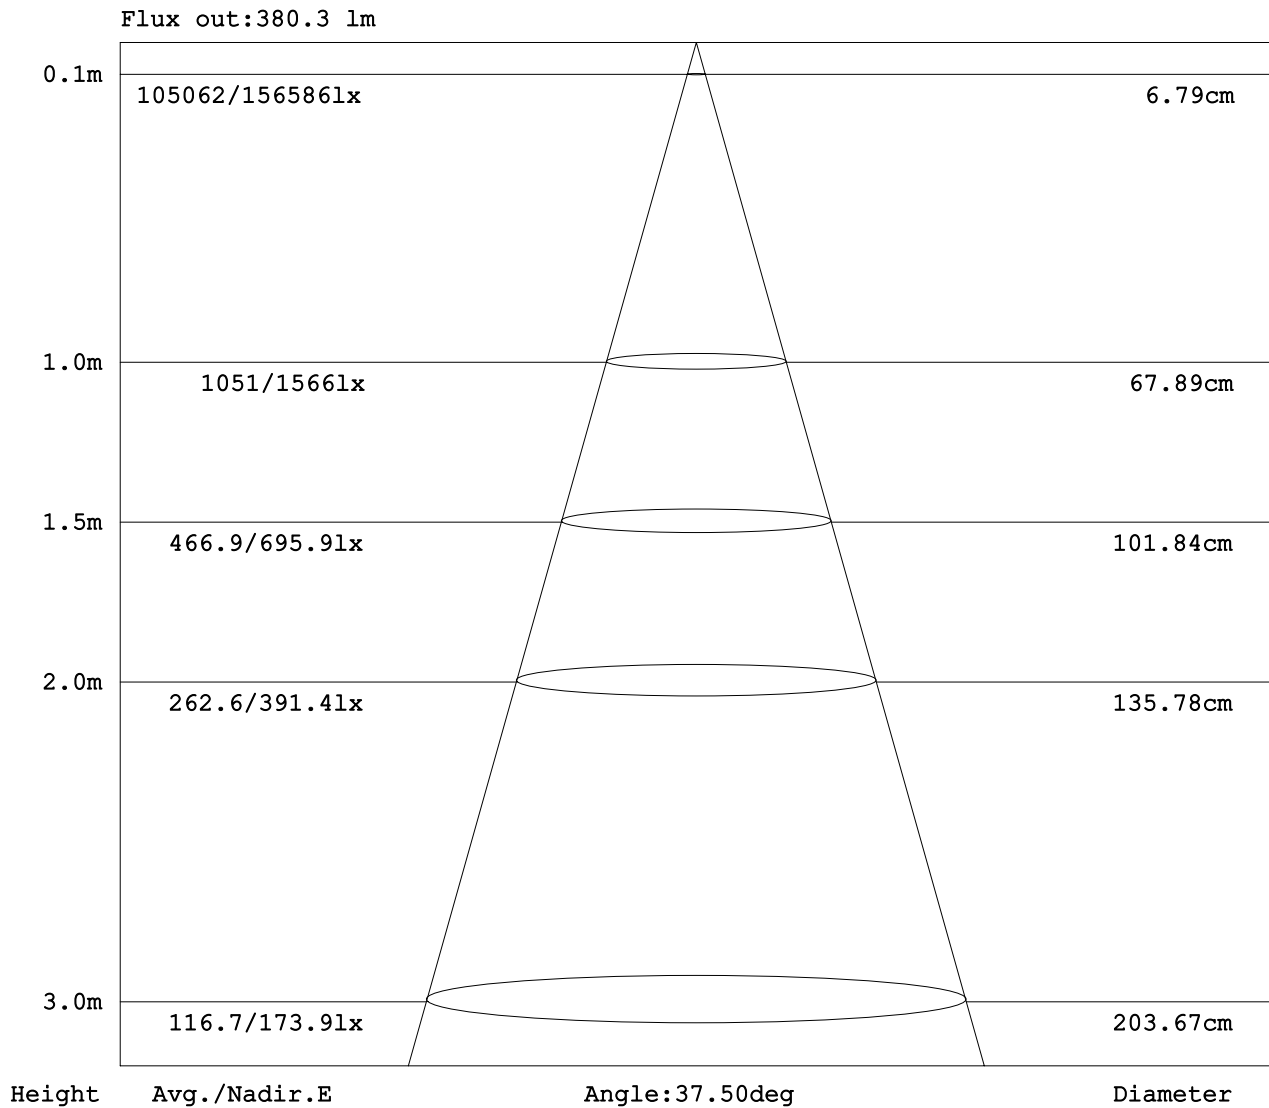

Lamp Type: 低压V-LED DPAR30S
 Tester:
 Temperature:25.3deg
 Manufactory:CIVILIGHT

Luminaires Type:
 Test Date:2014-05-26
 Humidity:65%
 Remarks: