

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.3312	-58.5	20.89	-27.0	71.81	4.5	4809	36.0	38.01	67.5	13.48
-88.5	1.082	-57.0	21.91	-25.5	87.73	6.0	4297	37.5	34.46	69.0	12.41
-87.0	1.834	-55.5	22.83	-24.0	112.9	7.5	3575	39.0	32.31	70.5	11.20
-85.5	2.707	-54.0	23.48	-22.5	143.8	9.0	2945	40.5	31.04	72.0	10.07
-84.0	3.567	-52.5	23.99	-21.0	195.0	10.5	2415	42.0	30.72	73.5	8.984
-82.5	4.668	-51.0	24.45	-19.5	317.8	12.0	1914	43.5	29.06	75.0	8.339
-81.0	5.700	-49.5	25.37	-18.0	574.1	13.5	1488	45.0	27.48	76.5	8.064
-79.5	6.848	-48.0	26.60	-16.5	965.1	15.0	1084	46.5	26.61	78.0	7.197
-78.0	7.694	-46.5	27.90	-15.0	1377	16.5	694.7	48.0	25.67	79.5	6.087
-76.5	8.361	-45.0	29.00	-13.5	1778	18.0	359.6	49.5	24.73	81.0	4.836
-75.0	9.073	-43.5	29.88	-12.0	2237	19.5	215.3	51.0	23.78	82.5	3.712
-73.5	10.17	-42.0	31.10	-10.5	2769	21.0	154.6	52.5	23.38	84.0	2.857
-72.0	11.34	-40.5	32.51	-9.0	3374	22.5	119.7	54.0	22.83	85.5	1.870
-70.5	12.52	-39.0	34.57	-7.5	4152	24.0	93.25	55.5	21.92	87.0	1.092
-69.0	13.54	-37.5	36.61	-6.0	5174	25.5	75.58	57.0	20.95	88.5	0.3881
-67.5	14.50	-36.0	39.06	-4.5	6326	27.0	65.66	58.5	20.06	90.0	0.2109
-66.0	15.57	-34.5	42.17	-3.0	7397	28.5	58.45	60.0	19.34		
-64.5	16.71	-33.0	46.13	-1.5	8103	30.0	52.29	61.5	18.17		
-63.0	17.95	-31.5	51.11	0.0	8285	31.5	47.76	63.0	16.85		
-61.5	19.02	-30.0	56.29	1.5	7855	33.0	44.55	64.5	15.64		
-60.0	19.95	-28.5	62.14	3.0	6727	34.5	41.14	66.0	14.54		

Electricity Parameter:

Current I: 0.1050A Power: 12.80W
Voltage V: 121.4V PF: 0.994


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 23.8deg @ (50%): 13.7deg @ (75%): 7.9deg @ (50%): 13.7deg
Diffuse angle: @ (25%): 23.9deg @ (50%): 13.9deg @ (75%): 7.9deg @ (50%): 13.9deg
Imax=8318cd (C=0.0deg,G=-0.5deg) C0-180Plane Imax= 8318cd(G=-0.5deg)
C0-180Plane I0= 8285cd

Lamp Type:DPAR30S NP01Q13
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-05-26
Humidity:65%
Remarks:

Average Illuminance Figure

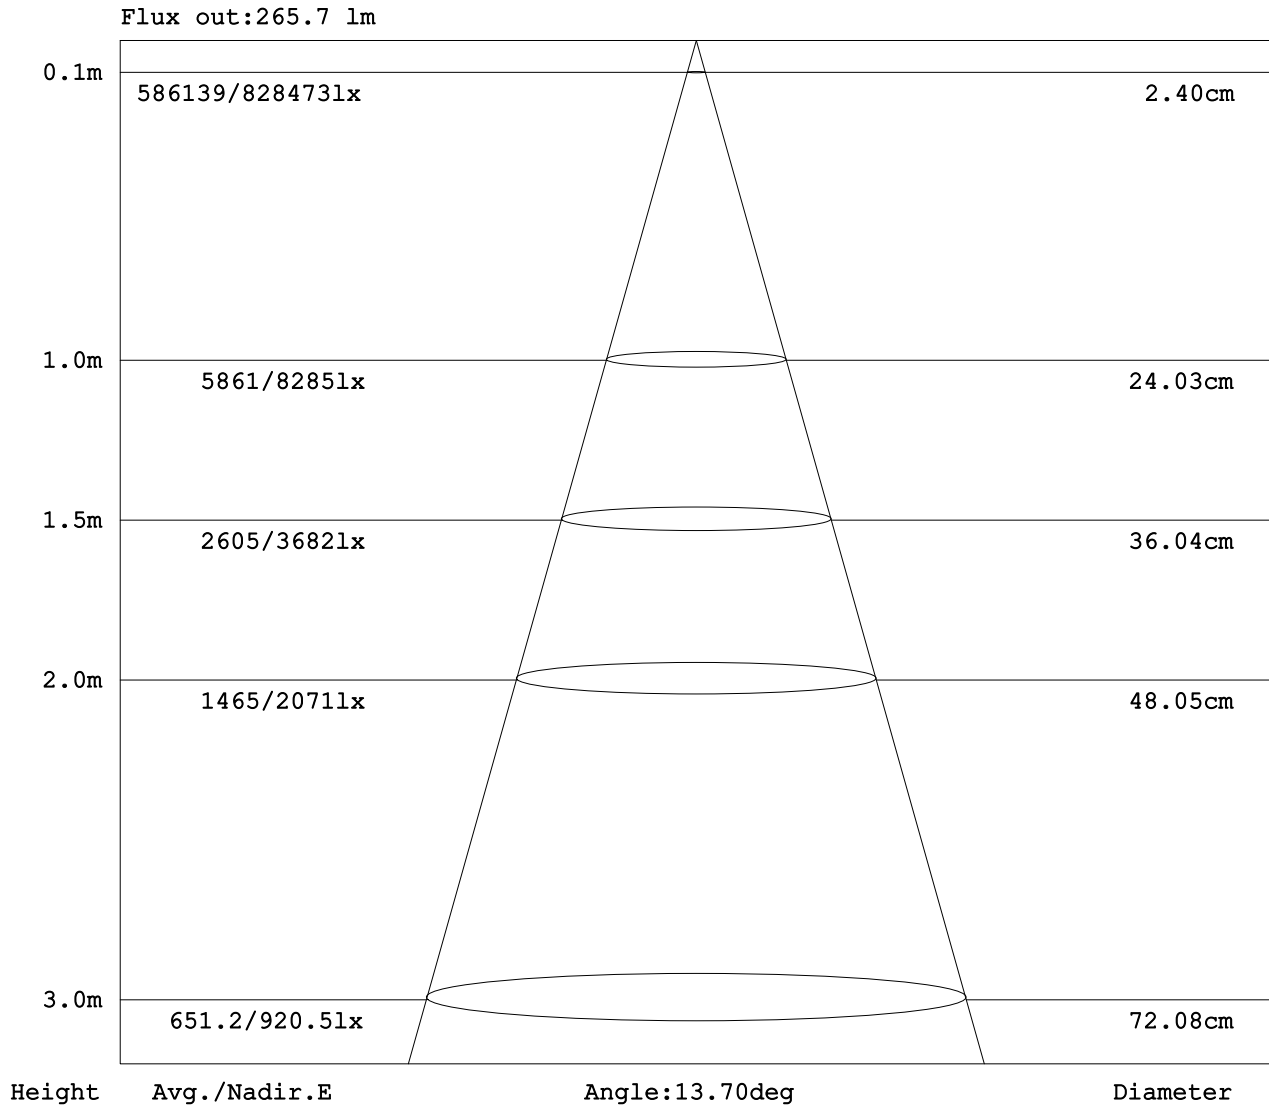

Lamp Type:DPAR30S NP01Q13
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-05-26
 Humidity:65%
 Remarks: