

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.1917	-58.5	22.71	-27.0	93.31	4.5	3799	36.0	42.12	67.5	14.80
-88.5	0.9437	-57.0	23.45	-25.5	118.9	6.0	3514	37.5	39.29	69.0	13.60
-87.0	1.836	-55.5	24.29	-24.0	166.8	7.5	3271	39.0	36.99	70.5	12.44
-85.5	2.829	-54.0	25.06	-22.5	252.1	9.0	3012	40.5	34.95	72.0	11.31
-84.0	3.707	-52.5	25.95	-21.0	386.1	10.5	2689	42.0	33.26	73.5	10.14
-82.5	4.771	-51.0	26.83	-19.5	594.2	12.0	2281	43.5	31.74	75.0	9.043
-81.0	5.826	-49.5	27.82	-18.0	868.5	13.5	1781	45.0	30.24	76.5	8.428
-79.5	7.236	-48.0	28.97	-16.5	1200	15.0	1334	46.5	28.88	78.0	7.357
-78.0	8.058	-46.5	30.30	-15.0	1607	16.5	977.6	48.0	27.78	79.5	5.962
-76.5	8.807	-45.0	31.85	-13.5	2068	18.0	683.4	49.5	26.85	81.0	4.860
-75.0	9.913	-43.5	33.56	-12.0	2523	19.5	418.1	51.0	25.96	82.5	3.829
-73.5	11.13	-42.0	35.43	-10.5	2906	21.0	260.9	52.5	25.17	84.0	2.892
-72.0	12.28	-40.5	37.44	-9.0	3198	22.5	167.8	54.0	24.30	85.5	1.974
-70.5	13.48	-39.0	39.78	-7.5	3428	24.0	119.4	55.5	23.45	87.0	1.025
-69.0	14.74	-37.5	42.62	-6.0	3671	25.5	93.84	57.0	22.69	88.5	0.2642
-67.5	16.06	-36.0	46.02	-4.5	3967	27.0	78.35	58.5	21.92	90.0	0.2266
-66.0	17.35	-34.5	50.11	-3.0	4228	28.5	68.02	60.0	21.01		
-64.5	18.68	-33.0	55.06	-1.5	4387	30.0	60.49	61.5	19.94		
-63.0	19.88	-31.5	60.82	0.0	4413	31.5	54.49	63.0	18.78		
-61.5	21.06	-30.0	68.10	1.5	4309	33.0	49.58	64.5	17.45		
-60.0	21.86	-28.5	78.18	3.0	4088	34.5	45.52	66.0	16.17		

Electricity Parameter:

Current I: 0.0A Power: 0.0W
Voltage V: 122.6V PF: 0.000


Optical Parameter (Distance=2.900m) :

Diffuse angle: @(25%): 32.7deg @(50%): 25.2deg @(75%): 15.4deg @50%: 25.2deg
Diffuse angle: @(25%): 32.7deg @(50%): 25.2deg @(75%): 15.5deg @50%: 25.2deg
Imax=4417cd (C=0.0deg,G=-0.5deg) C0-180Plane Imax= 4417cd(G=-0.5deg)
C0-180Plane I0= 4413cd

Lamp Type:DPAR30S NP01Q13
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-05-26
Humidity:65%
Remarks:

Average Illuminance Figure

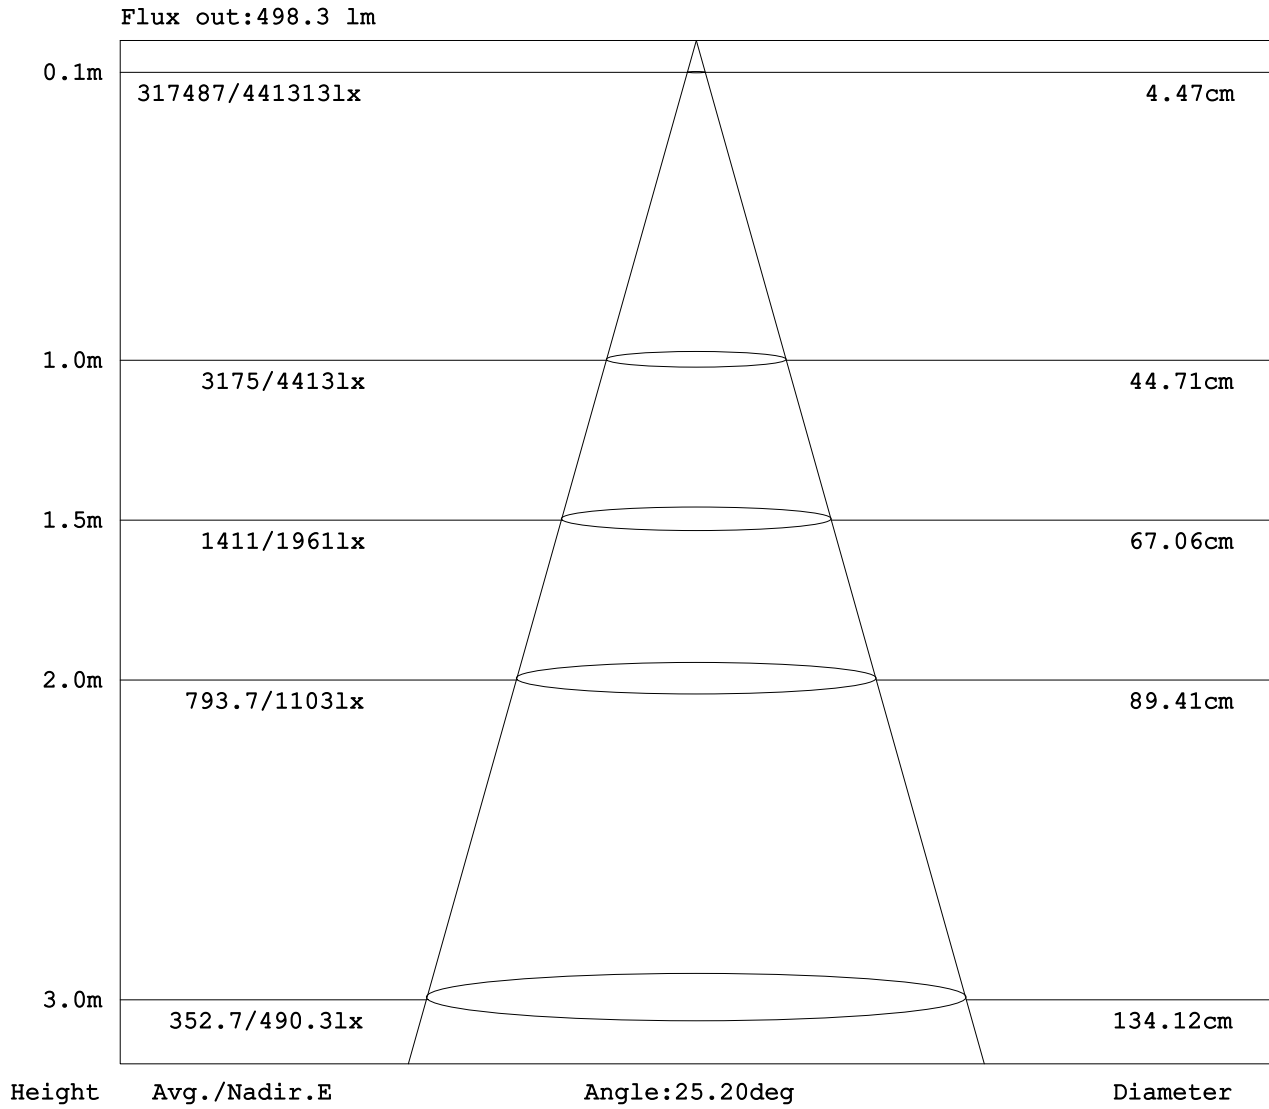

Lamp Type:DPAR30S NP01Q13
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-05-26
Humidity:65%
Remarks: