

Intensity data:(deg , cd) C0-180

| | A | | I A | | I A | | I A | | I A | | I A |
|-------|-------|-------|-------|-------|-------|------|-------|------|-------|------|--------|
| -90.0 | 2.858 | -58.5 | 24.52 | -27.0 | 493.6 | 4.5 | 1650 | 36.0 | 117.8 | 67.5 | 12.08 |
| -88.5 | 3.767 | -57.0 | 26.53 | -25.5 | 567.3 | 6.0 | 1603 | 37.5 | 98.15 | 69.0 | 11.29 |
| -87.0 | 4.763 | -55.5 | 28.59 | -24.0 | 638.7 | 7.5 | 1552 | 39.0 | 82.59 | 70.5 | 10.50 |
| -85.5 | 5.761 | -54.0 | 31.17 | -22.5 | 718.0 | 9.0 | 1495 | 40.5 | 70.64 | 72.0 | 9.818 |
| -84.0 | 6.859 | -52.5 | 34.13 | -21.0 | 800.9 | 10.5 | 1422 | 42.0 | 61.06 | 73.5 | 9.137 |
| -82.5 | 7.681 | -51.0 | 37.50 | -19.5 | 886.3 | 12.0 | 1334 | 43.5 | 53.24 | 75.0 | 8.510 |
| -81.0 | 8.446 | -49.5 | 41.47 | -18.0 | 974.2 | 13.5 | 1225 | 45.0 | 46.67 | 76.5 | 7.686 |
| -79.5 | 9.094 | -48.0 | 46.12 | -16.5 | 1067 | 15.0 | 1111 | 46.5 | 41.36 | 78.0 | 6.845 |
| -78.0 | 9.828 | -46.5 | 51.58 | -15.0 | 1169 | 16.5 | 1012 | 48.0 | 36.94 | 79.5 | 5.653 |
| -76.5 | 10.53 | -45.0 | 57.87 | -13.5 | 1279 | 18.0 | 915.3 | 49.5 | 33.23 | 81.0 | 4.619 |
| -75.0 | 11.37 | -43.5 | 65.51 | -12.0 | 1378 | 19.5 | 826.2 | 51.0 | 30.07 | 82.5 | 3.605 |
| -73.5 | 12.27 | -42.0 | 75.09 | -10.5 | 1461 | 21.0 | 737.1 | 52.5 | 27.35 | 84.0 | 2.754 |
| -72.0 | 13.17 | -40.5 | 87.13 | -9.0 | 1528 | 22.5 | 653.6 | 54.0 | 24.99 | 85.5 | 1.695 |
| -70.5 | 14.10 | -39.0 | 102.9 | -7.5 | 1582 | 24.0 | 576.0 | 55.5 | 22.92 | 87.0 | 0.7810 |
| -69.0 | 15.20 | -37.5 | 124.2 | -6.0 | 1629 | 25.5 | 496.7 | 57.0 | 21.11 | 88.5 | 0.2312 |
| -67.5 | 16.32 | -36.0 | 153.1 | -4.5 | 1682 | 27.0 | 418.4 | 58.5 | 19.40 | 90.0 | 0.0557 |
| -66.0 | 17.40 | -34.5 | 191.3 | -3.0 | 1747 | 28.5 | 349.1 | 60.0 | 17.80 | | |
| -64.5 | 18.57 | -33.0 | 239.0 | -1.5 | 1774 | 30.0 | 285.6 | 61.5 | 16.37 | | |
| -63.0 | 19.74 | -31.5 | 288.9 | 0.0 | 1776 | 31.5 | 229.8 | 63.0 | 15.08 | | |
| -61.5 | 21.12 | -30.0 | 351.8 | 1.5 | 1745 | 33.0 | 182.8 | 64.5 | 13.95 | | |
| -60.0 | 22.73 | -28.5 | 420.6 | 3.0 | 1699 | 34.5 | 146.2 | 66.0 | 12.95 | | |

Electricity Parameter:

Current I: 0.1090A Power: 12.82W
Voltage V: 117.3V PF: 0.995


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 54.4deg @ (50%): 37.8deg @ (75%): 24.7deg @ (50%): 37.8deg
Diffuse angle: @ (25%): 54.4deg @ (50%): 37.8deg @ (75%): 24.7deg @ (50%): 37.8deg
Imax=1779cd (C=0.0deg,G=-1.0deg) C0-180Plane Imax= 1779cd(G=-1.0deg)
C0-180Plane I0= 1776cd

Lamp Type:DPAR30S NP01Q13
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-05-26
Humidity:65%
Remarks:

Average Illuminance Figure

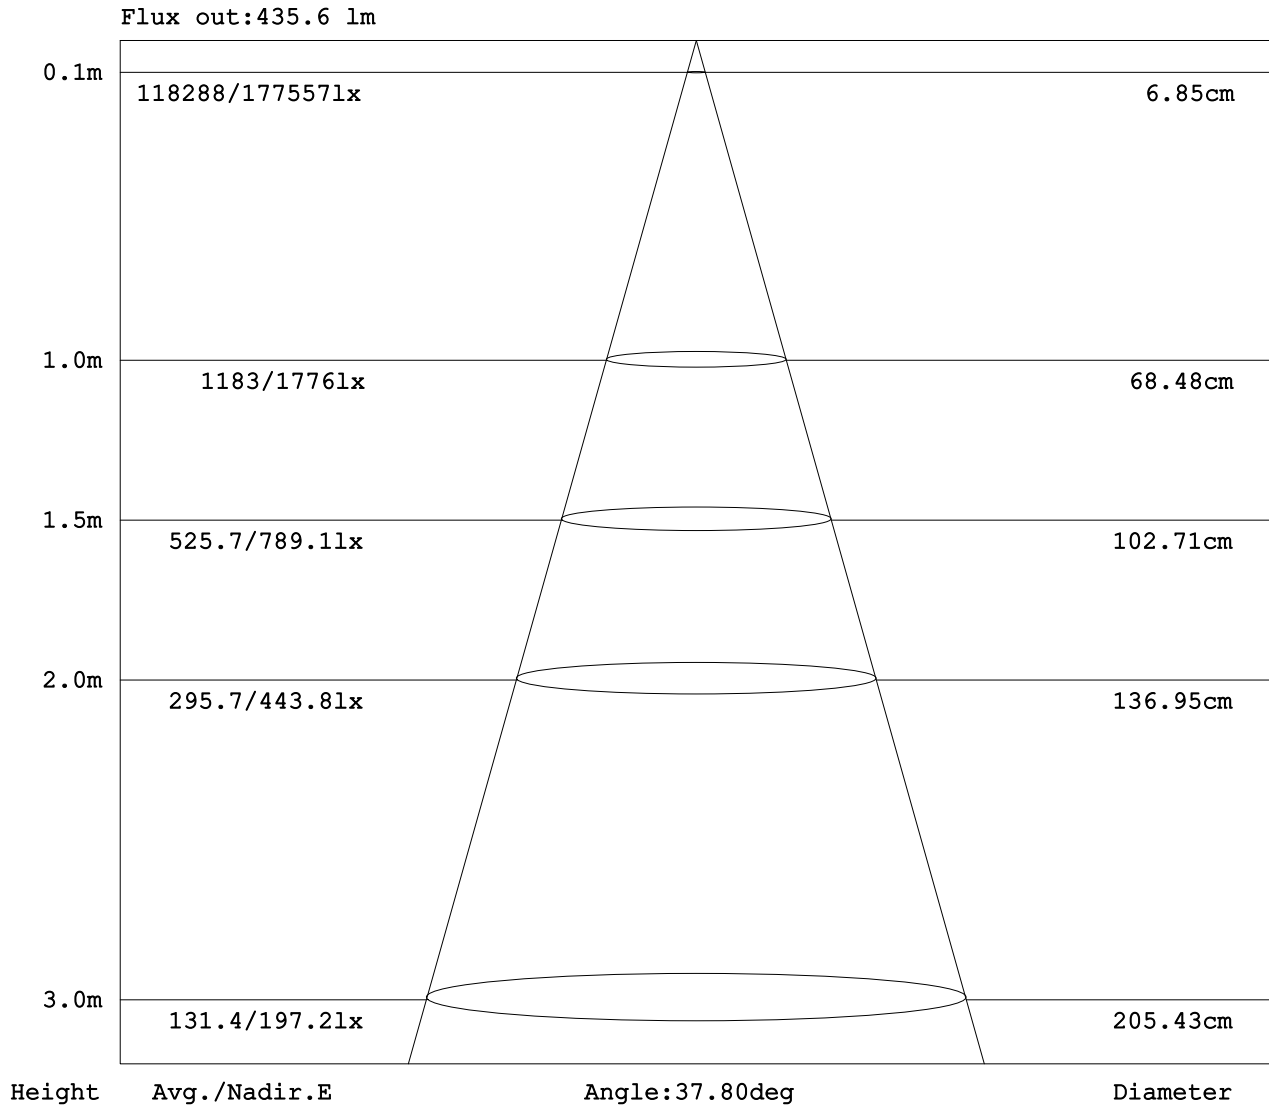

Lamp Type:DPAR30S NP01Q13
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-05-26
 Humidity:65%
 Remarks: