

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1395	-58.5	19.56	-27.0	61.56	4.5	4817	36.0	34.06	67.5	12.48
-88.5	0.5247	-57.0	20.36	-25.5	74.46	6.0	4272	37.5	32.17	69.0	11.43
-87.0	1.223	-55.5	21.00	-24.0	96.20	7.5	3421	39.0	30.66	70.5	10.25
-85.5	1.976	-54.0	21.55	-22.5	124.0	9.0	2767	40.5	28.74	72.0	9.185
-84.0	2.761	-52.5	22.11	-21.0	161.2	10.5	2259	42.0	27.25	73.5	8.190
-82.5	3.691	-51.0	22.53	-19.5	236.3	12.0	1818	43.5	26.13	75.0	7.343
-81.0	4.791	-49.5	22.94	-18.0	395.8	13.5	1468	45.0	25.01	76.5	6.949
-79.5	5.668	-48.0	23.50	-16.5	696.0	15.0	1122	46.5	23.88	78.0	6.158
-78.0	6.623	-46.5	24.45	-15.0	1061	16.5	739.1	48.0	23.11	79.5	5.169
-76.5	7.090	-45.0	25.58	-13.5	1425	18.0	381.4	49.5	22.59	81.0	4.143
-75.0	7.716	-43.5	26.96	-12.0	1804	19.5	214.6	51.0	21.95	82.5	3.147
-73.5	8.725	-42.0	28.04	-10.5	2222	21.0	150.9	52.5	21.38	84.0	2.521
-72.0	9.847	-40.5	29.21	-9.0	2658	22.5	117.3	54.0	20.81	85.5	1.722
-70.5	11.10	-39.0	30.40	-7.5	3214	24.0	91.08	55.5	20.13	87.0	0.9882
-69.0	12.27	-37.5	32.28	-6.0	4004	25.5	71.94	57.0	19.36	88.5	0.3826
-67.5	13.30	-36.0	34.48	-4.5	5096	27.0	60.70	58.5	18.59	90.0	0.0417
-66.0	14.35	-34.5	37.05	-3.0	6295	28.5	53.82	60.0	17.61		
-64.5	15.47	-33.0	40.12	-1.5	7216	30.0	49.47	61.5	16.59		
-63.0	16.64	-31.5	44.05	0.0	7600	31.5	46.14	63.0	15.56		
-61.5	17.79	-30.0	49.17	1.5	7358	33.0	41.90	64.5	14.56		
-60.0	18.78	-28.5	54.60	3.0	6476	34.5	37.20	66.0	13.56		

Electricity Parameter:

Current I: 0.1040A Power: 12.39W
Voltage V: 119.9V PF: 0.992


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 788.6lm$ Efficiency: $Eff=63.60lm/W$
Diffuse angle: @ (25%): 23.2deg @ (50%): 13.1deg @ (75%): 7.3deg @ (50%): 13.1deg
Diffuse angle: @ (25%): 23.2deg @ (50%): 13.1deg @ (75%): 7.3deg @ (50%): 13.1deg
 $I_{max}=7601cd$ (C=0.0deg,G=0.5deg) C0-180Plane $I_{max}= 7601cd$ (G=0.5deg)
C0-180Plane $I_{0}= 7600cd$

Lamp Type: 低压V-LED DPAR30S
Tester:
Temperature: 25.3deg
Manufactory:

Luminaires Type:
Test Date: 2014-05-24
Humidity: 65%
Remarks:

Average Illuminance Figure

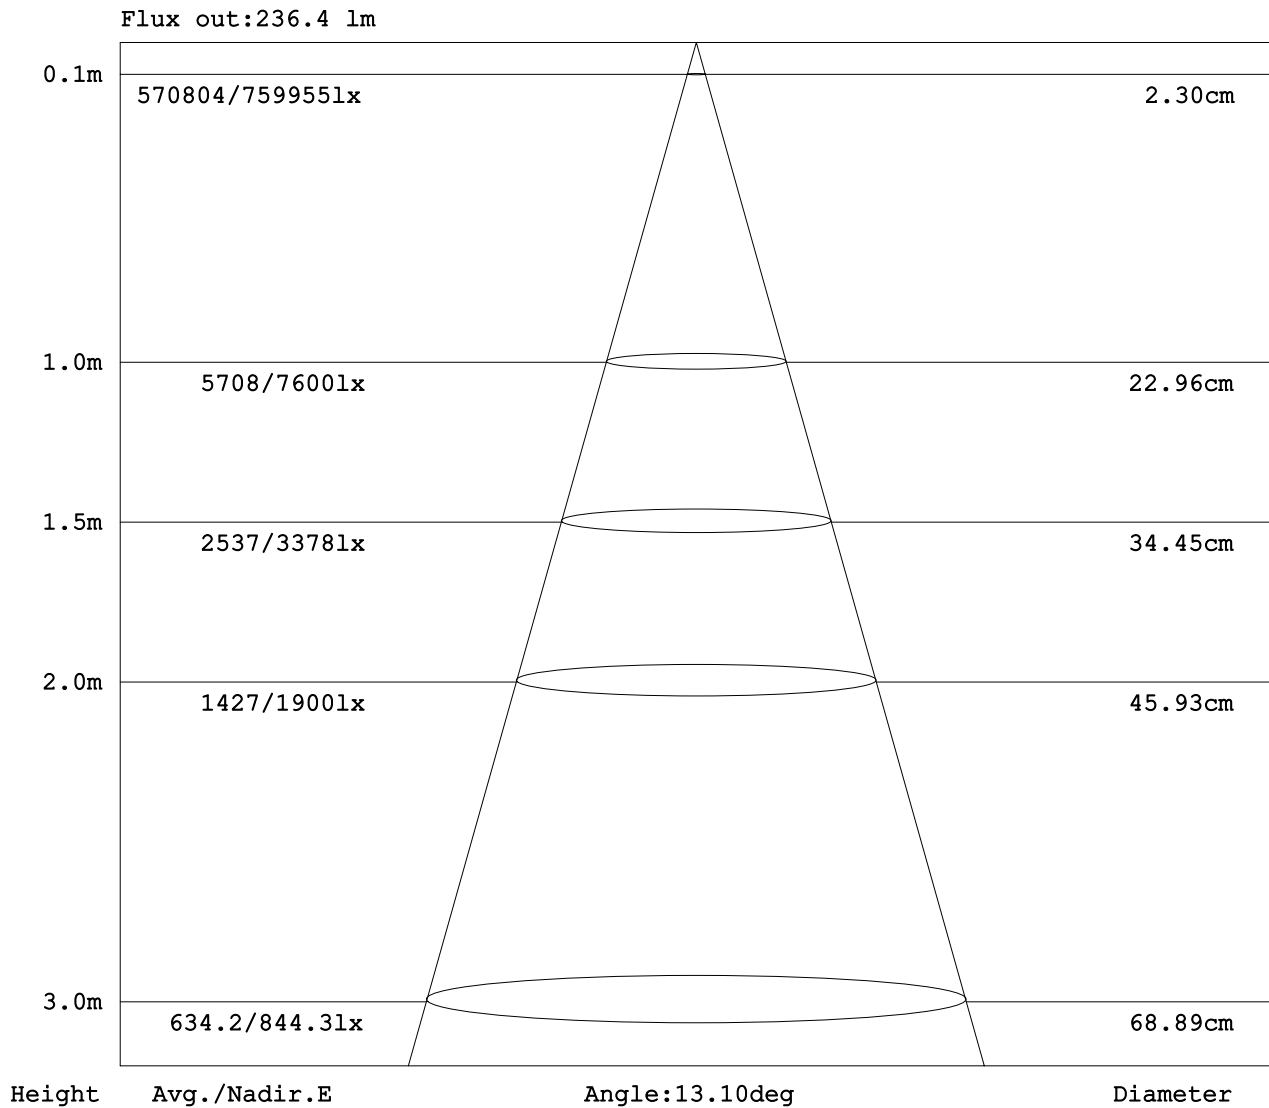

Lamp Type: 低压V-LED DPAR30S
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-05-24
 Humidity:65%
 Remarks: