

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.8890	-58.5	21.78	-27.0	401.8	4.5	1395	36.0	111.9	67.5	11.90
-88.5	1.745	-57.0	23.61	-25.5	463.1	6.0	1350	37.5	93.12	69.0	11.04
-87.0	2.670	-55.5	25.58	-24.0	525.3	7.5	1302	39.0	79.08	70.5	10.10
-85.5	3.423	-54.0	27.74	-22.5	592.3	9.0	1251	40.5	68.22	72.0	9.375
-84.0	4.315	-52.5	30.21	-21.0	665.7	10.5	1192	42.0	59.55	73.5	8.596
-82.5	5.241	-51.0	33.04	-19.5	743.9	12.0	1118	43.5	52.35	75.0	7.878
-81.0	6.290	-49.5	36.41	-18.0	819.5	13.5	1031	45.0	46.19	76.5	7.289
-79.5	7.106	-48.0	40.31	-16.5	896.7	15.0	940.3	46.5	41.24	78.0	6.913
-78.0	7.807	-46.5	44.92	-15.0	985.1	16.5	860.8	48.0	36.95	79.5	6.118
-76.5	8.535	-45.0	50.51	-13.5	1081	18.0	786.2	49.5	33.34	81.0	5.202
-75.0	9.190	-43.5	57.10	-12.0	1165	19.5	708.2	51.0	30.23	82.5	4.260
-73.5	9.937	-42.0	65.03	-10.5	1225	21.0	634.4	52.5	27.51	84.0	3.365
-72.0	10.69	-40.5	74.77	-9.0	1273	22.5	567.6	54.0	25.14	85.5	2.609
-70.5	11.52	-39.0	87.43	-7.5	1318	24.0	499.4	55.5	22.99	87.0	1.608
-69.0	12.40	-37.5	103.8	-6.0	1362	25.5	432.9	57.0	21.11	88.5	0.8000
-67.5	13.42	-36.0	124.5	-4.5	1406	27.0	371.5	58.5	19.41	90.0	0.1548
-66.0	14.44	-34.5	153.5	-3.0	1446	28.5	312.9	60.0	17.87		
-64.5	15.69	-33.0	191.5	-1.5	1478	30.0	258.8	61.5	16.42		
-63.0	17.07	-31.5	237.2	0.0	1494	31.5	210.6	63.0	15.10		
-61.5	18.55	-30.0	287.6	1.5	1483	33.0	169.7	64.5	13.94		
-60.0	20.14	-28.5	340.7	3.0	1443	34.5	136.9	66.0	12.88		

Electricity Parameter:

Current I: 0.1020A Power: 12.43W
Voltage V: 121.9V PF: 0.992


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 786.4lm$ Efficiency: $Eff=63.26lm/W$
Diffuse angle: @ (25%): 54.5deg @ (50%): 38.1deg @ (75%): 24.6deg @ (50%): 38.1deg
Diffuse angle: @ (25%): 54.5deg @ (50%): 38.1deg @ (75%): 24.6deg @ (50%): 38.1deg
 $I_{max}=1495cd$ (C=0.0deg,G=-0.5deg) C0-180Plane $I_{max}= 1495cd$ (G=-0.5deg)
C0-180Plane $I_{0}= 1494cd$

Lamp Type: 低压V-LED DPAR30S
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-05-24
Humidity: 65%
Remarks:

Average Illuminance Figure

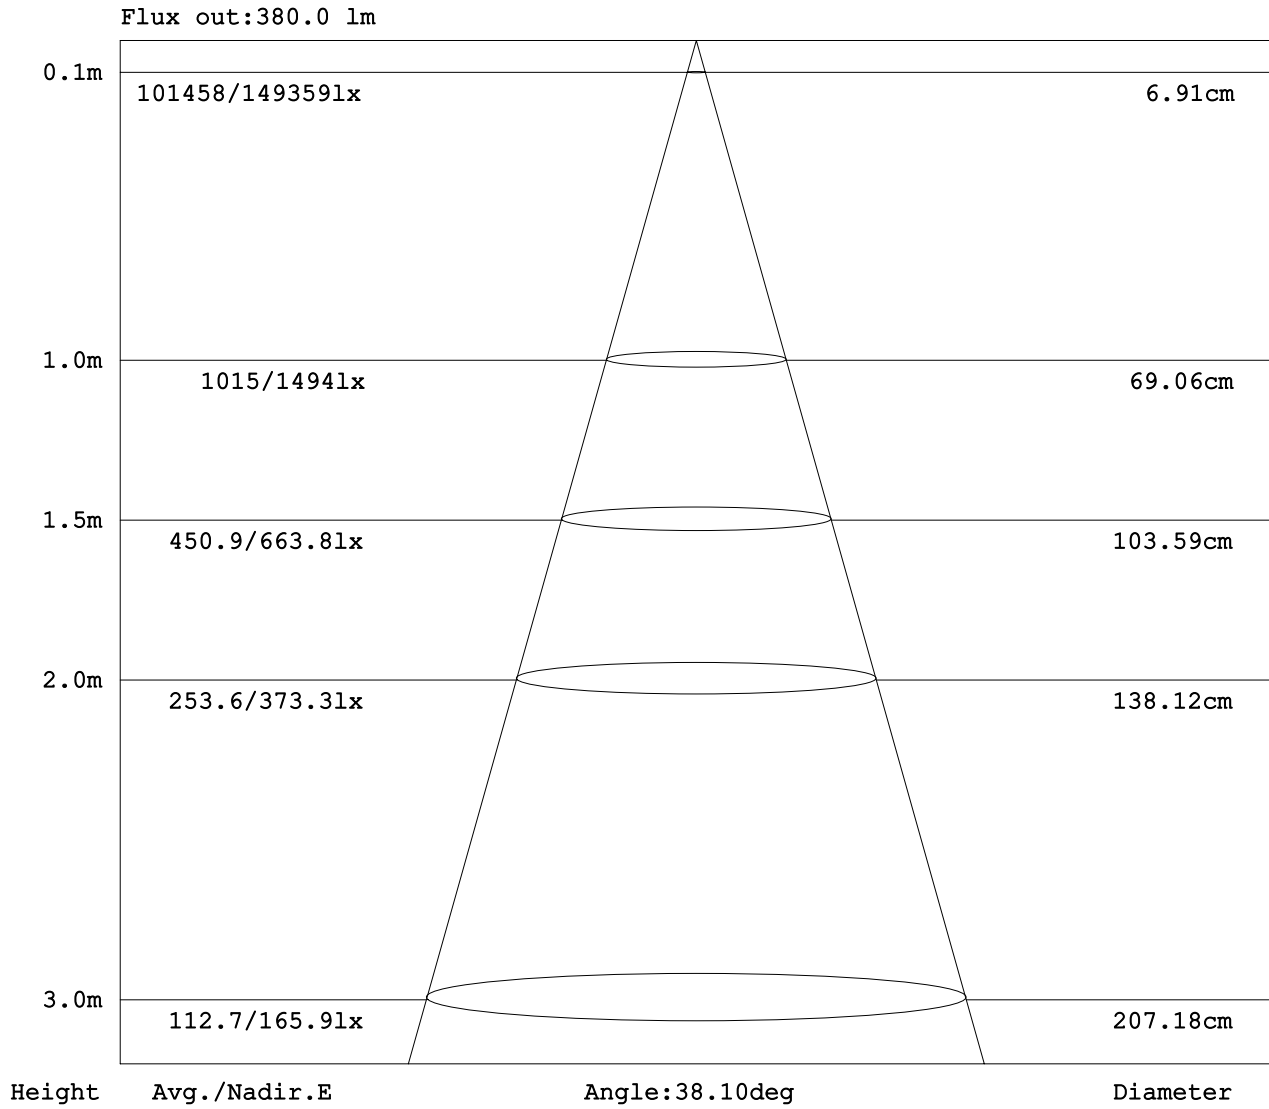

Lamp Type: 低压V-LED DPAR30S
 Tester:
 Temperature: 25.3deg
 Manufactory: CIVILIGHT

Luminaires Type:
 Test Date: 2014-05-24
 Humidity: 65%
 Remarks: