

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.2092	-58.5	32.13	-27.0	200.2	4.5	5555	36.0	112.2	67.5	21.23
-88.5	0.8564	-57.0	33.57	-25.5	228.1	6.0	4224	37.5	103.8	69.0	19.40
-87.0	1.923	-55.5	35.27	-24.0	267.8	7.5	3167	39.0	96.65	70.5	17.72
-85.5	3.166	-54.0	37.21	-22.5	320.3	9.0	2350	40.5	90.21	72.0	16.05
-84.0	4.634	-52.5	39.52	-21.0	395.9	10.5	1783	42.0	81.28	73.5	14.46
-82.5	6.119	-51.0	42.52	-19.5	501.5	12.0	1387	43.5	71.01	75.0	12.85
-81.0	7.626	-49.5	46.78	-18.0	636.6	13.5	1084	45.0	61.73	76.5	11.23
-79.5	9.266	-48.0	52.44	-16.5	808.8	15.0	847.8	46.5	54.03	78.0	9.582
-78.0	10.77	-46.5	59.87	-15.0	1030	16.5	671.9	48.0	48.10	79.5	7.960
-76.5	12.36	-45.0	68.67	-13.5	1317	18.0	533.0	49.5	43.60	81.0	6.409
-75.0	13.96	-43.5	78.47	-12.0	1696	19.5	415.6	51.0	40.32	82.5	4.842
-73.5	15.55	-42.0	88.16	-10.5	2238	21.0	335.7	52.5	37.91	84.0	3.376
-72.0	17.14	-40.5	96.80	-9.0	3044	22.5	280.4	54.0	36.03	85.5	2.109
-70.5	18.90	-39.0	105.3	-7.5	4014	24.0	239.3	55.5	34.52	87.0	1.011
-69.0	20.70	-37.5	114.6	-6.0	5241	25.5	207.8	57.0	33.06	88.5	0.3009
-67.5	22.32	-36.0	124.7	-4.5	6635	27.0	182.9	58.5	31.55	90.0	0.1080
-66.0	23.96	-34.5	134.1	-3.0	7896	28.5	163.5	60.0	29.86		
-64.5	25.62	-33.0	142.6	-1.5	8652	30.0	148.6	61.5	28.08		
-63.0	27.42	-31.5	151.8	0.0	8741	31.5	137.6	63.0	26.40		
-61.5	29.11	-30.0	163.6	1.5	8132	33.0	128.8	64.5	24.84		
-60.0	30.71	-28.5	179.4	3.0	6970	34.5	120.8	66.0	23.08		

Electricity Parameter:

Current I: 0.1890A Power: 17.38W
Voltage V: 119.7V PF: 0.765


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 19.8deg @ (50%): 12.6deg @ (75%): 7.8deg @ (50%): 12.6deg
Diffuse angle: @ (25%): 19.9deg @ (50%): 12.8deg @ (75%): 7.9deg @ (50%): 12.8deg
Imax=8796cd (C=0.0deg,G=-0.5deg) C0-180Plane Imax= 8796cd(G=-0.5deg)
C0-180Plane I0= 8741cd

Lamp Type:DPAR38 KP01Q17
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-09-09
Humidity:65%
Remarks:

Average Illuminance Figure

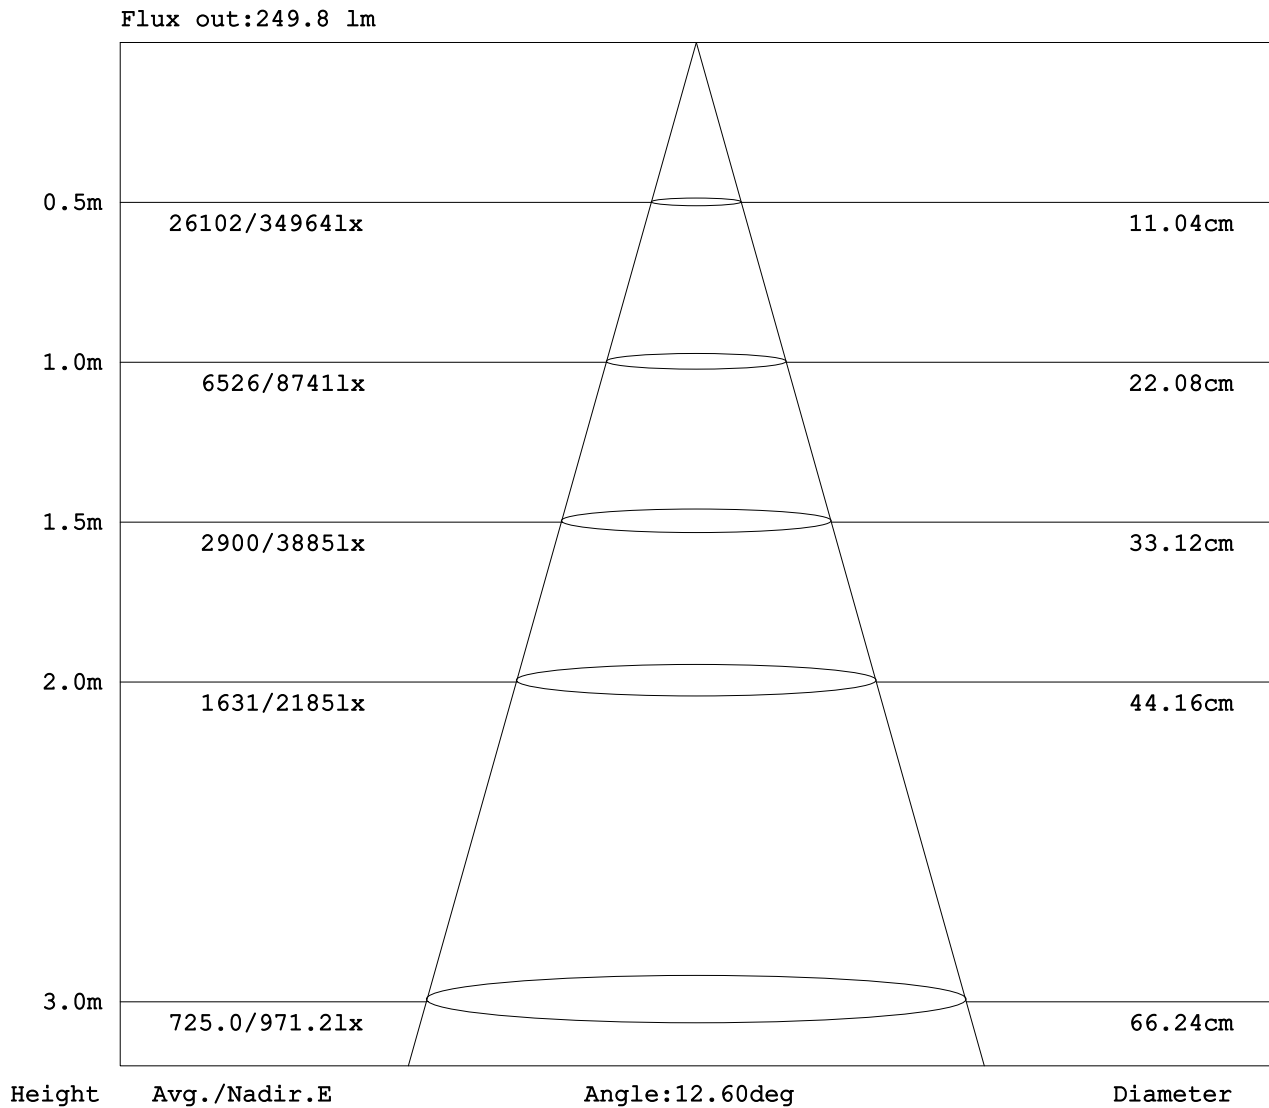

Lamp Type:DPAR38 KP01Q17
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-09-09
 Humidity:65%
 Remarks: