

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.2440	-58.5	35.42	-27.0	168.5	4.5	4569	36.0	111.5	67.5	22.72
-88.5	0.6291	-57.0	37.91	-25.5	181.0	6.0	4372	37.5	106.5	69.0	20.83
-87.0	1.451	-55.5	40.63	-24.0	197.3	7.5	3992	39.0	101.1	70.5	19.07
-85.5	2.554	-54.0	43.77	-22.5	222.2	9.0	3392	40.5	95.97	72.0	17.29
-84.0	3.954	-52.5	47.55	-21.0	258.8	10.5	2590	42.0	90.57	73.5	15.59
-82.5	5.460	-51.0	51.95	-19.5	310.8	12.0	1773	43.5	83.87	75.0	13.92
-81.0	7.085	-49.5	57.01	-18.0	389.9	13.5	1158	45.0	75.85	76.5	12.17
-79.5	8.749	-48.0	63.08	-16.5	526.3	15.0	771.6	46.5	67.69	78.0	10.50
-78.0	10.53	-46.5	69.83	-15.0	751.8	16.5	538.7	48.0	60.42	79.5	8.740
-76.5	12.27	-45.0	77.44	-13.5	1120	18.0	382.0	49.5	54.33	81.0	7.022
-75.0	13.95	-43.5	85.27	-12.0	1706	19.5	299.7	51.0	49.42	82.5	5.387
-73.5	15.64	-42.0	92.31	-10.5	2485	21.0	247.3	52.5	45.39	84.0	3.814
-72.0	17.37	-40.5	97.94	-9.0	3273	22.5	212.6	54.0	42.08	85.5	2.471
-70.5	19.19	-39.0	103.6	-7.5	3883	24.0	189.3	55.5	39.32	87.0	1.309
-69.0	21.03	-37.5	109.4	-6.0	4301	25.5	173.8	57.0	36.87	88.5	0.5468
-67.5	22.94	-36.0	114.4	-4.5	4539	27.0	162.1	58.5	34.67	90.0	0.1148
-66.0	24.88	-34.5	119.3	-3.0	4634	28.5	150.5	60.0	32.58		
-64.5	26.89	-33.0	125.5	-1.5	4659	30.0	139.7	61.5	30.54		
-63.0	28.91	-31.5	133.3	0.0	4664	31.5	130.7	63.0	28.56		
-61.5	30.98	-30.0	143.6	1.5	4670	33.0	123.2	64.5	26.56		
-60.0	33.15	-28.5	155.8	3.0	4650	34.5	116.9	66.0	24.60		

Electricity Parameter:

Current I: 0.1640A Power: 16.87W
Voltage V: 119.1V PF: 0.862


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 936.4lm$ Efficiency: $Eff=55.49lm/W$
Diffuse angle: @ (25%): 26.7deg @ (50%): 21.6deg @ (75%): 17.1deg @ (50%): 21.6deg
Diffuse angle: @ (25%): 26.7deg @ (50%): 21.6deg @ (75%): 17.2deg @ (50%): 21.6deg
 $I_{max}=4670cd$ (C=0.0deg,G=1.5deg) C0-180Plane $I_{max}= 4670cd$ (G=1.5deg)
C0-180Plane $I_{0}= 4664cd$

Lamp Type: 低压V-LED DPAR38
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-06-25
Humidity: 65%
Remarks:

Average Illuminance Figure

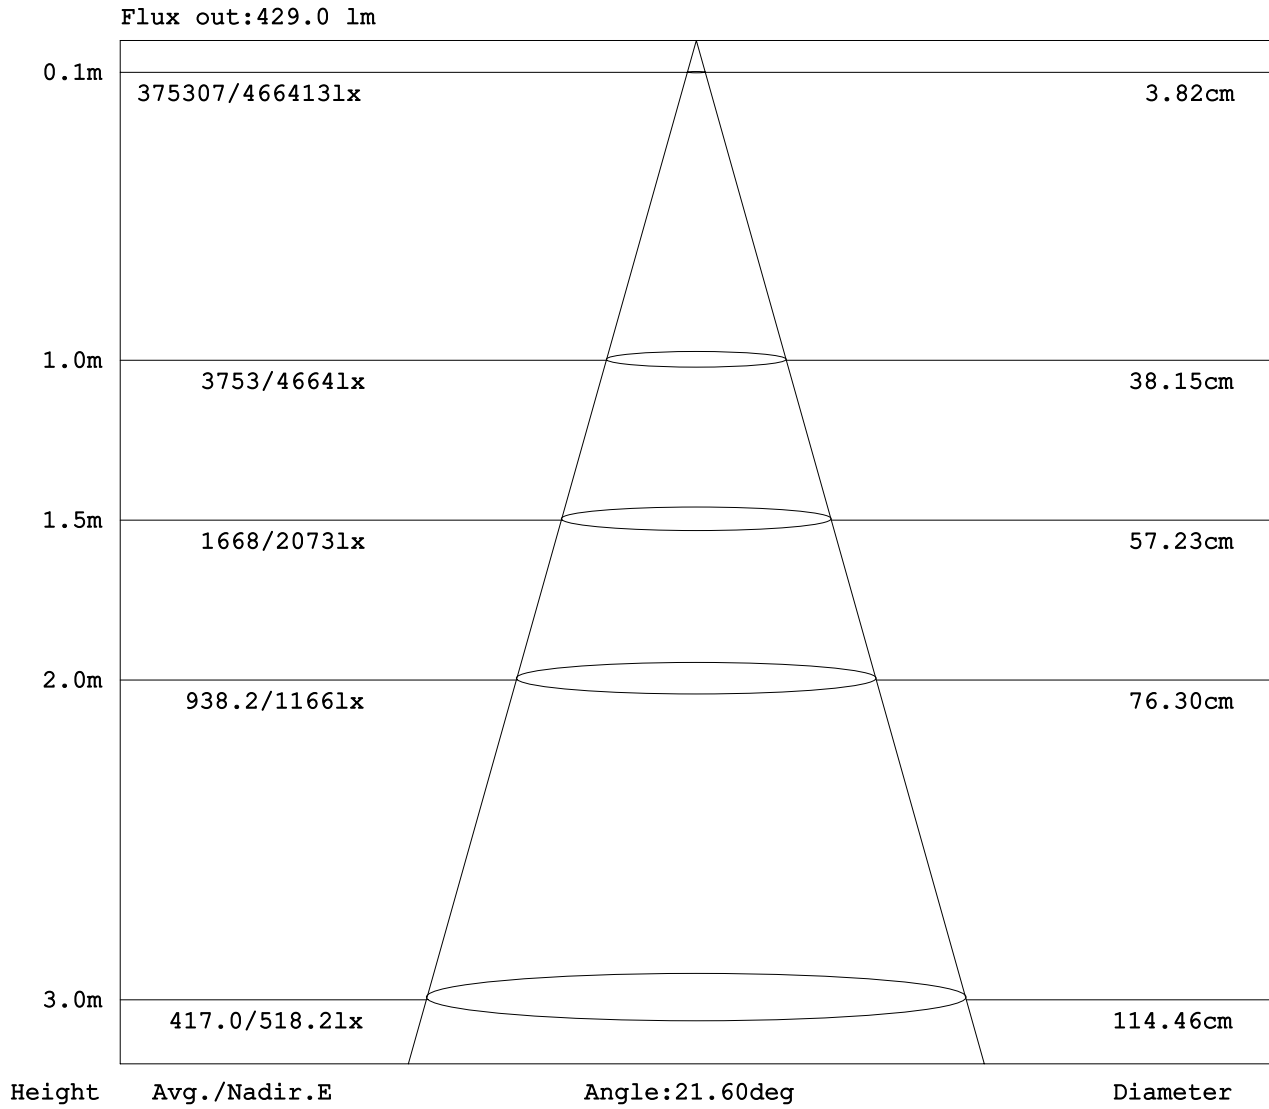

Lamp Type:低压V-LED DPAR38
 Tester:
 Temperature:25.3deg
 Manufactory:CIVILIGHT

Luminaires Type:
 Test Date:2014-06-25
 Humidity:65%
 Remarks: