

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.7670	-58.5	48.09	-27.0	331.2	4.5	1808	36.0	124.1	67.5	30.41
-88.5	2.479	-57.0	50.80	-25.5	397.4	6.0	1748	37.5	113.4	69.0	28.25
-87.0	4.525	-55.5	53.78	-24.0	485.4	7.5	1671	39.0	104.0	70.5	26.13
-85.5	6.781	-54.0	56.96	-22.5	599.3	9.0	1583	40.5	95.72	72.0	23.99
-84.0	9.193	-52.5	60.47	-21.0	736.4	10.5	1485	42.0	88.40	73.5	21.86
-82.5	11.62	-51.0	64.30	-19.5	887.2	12.0	1376	43.5	81.92	75.0	19.51
-81.0	14.05	-49.5	68.49	-18.0	1038	13.5	1256	45.0	76.10	76.5	17.15
-79.5	16.46	-48.0	73.34	-16.5	1182	15.0	1122	46.5	70.85	78.0	14.74
-78.0	18.99	-46.5	78.70	-15.0	1311	16.5	976.3	48.0	66.19	79.5	12.22
-76.5	21.24	-45.0	84.80	-13.5	1427	18.0	823.7	49.5	61.98	81.0	9.774
-75.0	23.44	-43.5	91.70	-12.0	1535	19.5	677.0	51.0	58.15	82.5	7.329
-73.5	25.57	-42.0	99.61	-10.5	1632	21.0	547.1	52.5	54.65	84.0	5.033
-72.0	27.69	-40.5	108.6	-9.0	1715	22.5	431.7	54.0	51.50	85.5	2.890
-70.5	29.81	-39.0	119.1	-7.5	1782	24.0	354.3	55.5	48.60	87.0	1.139
-69.0	31.99	-37.5	131.2	-6.0	1835	25.5	296.0	57.0	45.93	88.5	0.1716
-67.5	34.11	-36.0	145.7	-4.5	1871	27.0	251.8	58.5	43.43	90.0	0.1569
-66.0	36.27	-34.5	163.0	-3.0	1893	28.5	217.6	60.0	41.09		
-64.5	38.46	-33.0	183.8	-1.5	1902	30.0	190.7	61.5	38.87		
-63.0	40.67	-31.5	209.2	0.0	1899	31.5	168.9	63.0	36.74		
-61.5	43.01	-30.0	241.4	1.5	1883	33.0	151.4	64.5	34.64		
-60.0	45.51	-28.5	280.5	3.0	1853	34.5	136.7	66.0	32.53		

Electricity Parameter:

Current I: 0.3320A Power: 33.80W
Voltage V: 117.8V PF: 0.863


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 940.0\text{lm}$ Efficiency: $Eff=27.81\text{lm/W}$
Diffuse angle: @ (25%): 45.9deg @ (50%): 35.5deg @ (75%): 24.8deg @ (50%): 35.5deg
Diffuse angle: @ (25%): 45.9deg @ (50%): 35.5deg @ (75%): 24.8deg @ (50%): 35.5deg
 $I_{max}=1902\text{cd}$ (C=0.0deg,G=-1.0deg) C0-180Plane $I_{max}= 1902\text{cd}$ (G=-1.0deg)
C0-180Plane $I_{0}= 1899\text{cd}$

Lamp Type: 低压V-LED DPAR38
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-08-01
Humidity: 65%
Remarks:

Average Illuminance Figure

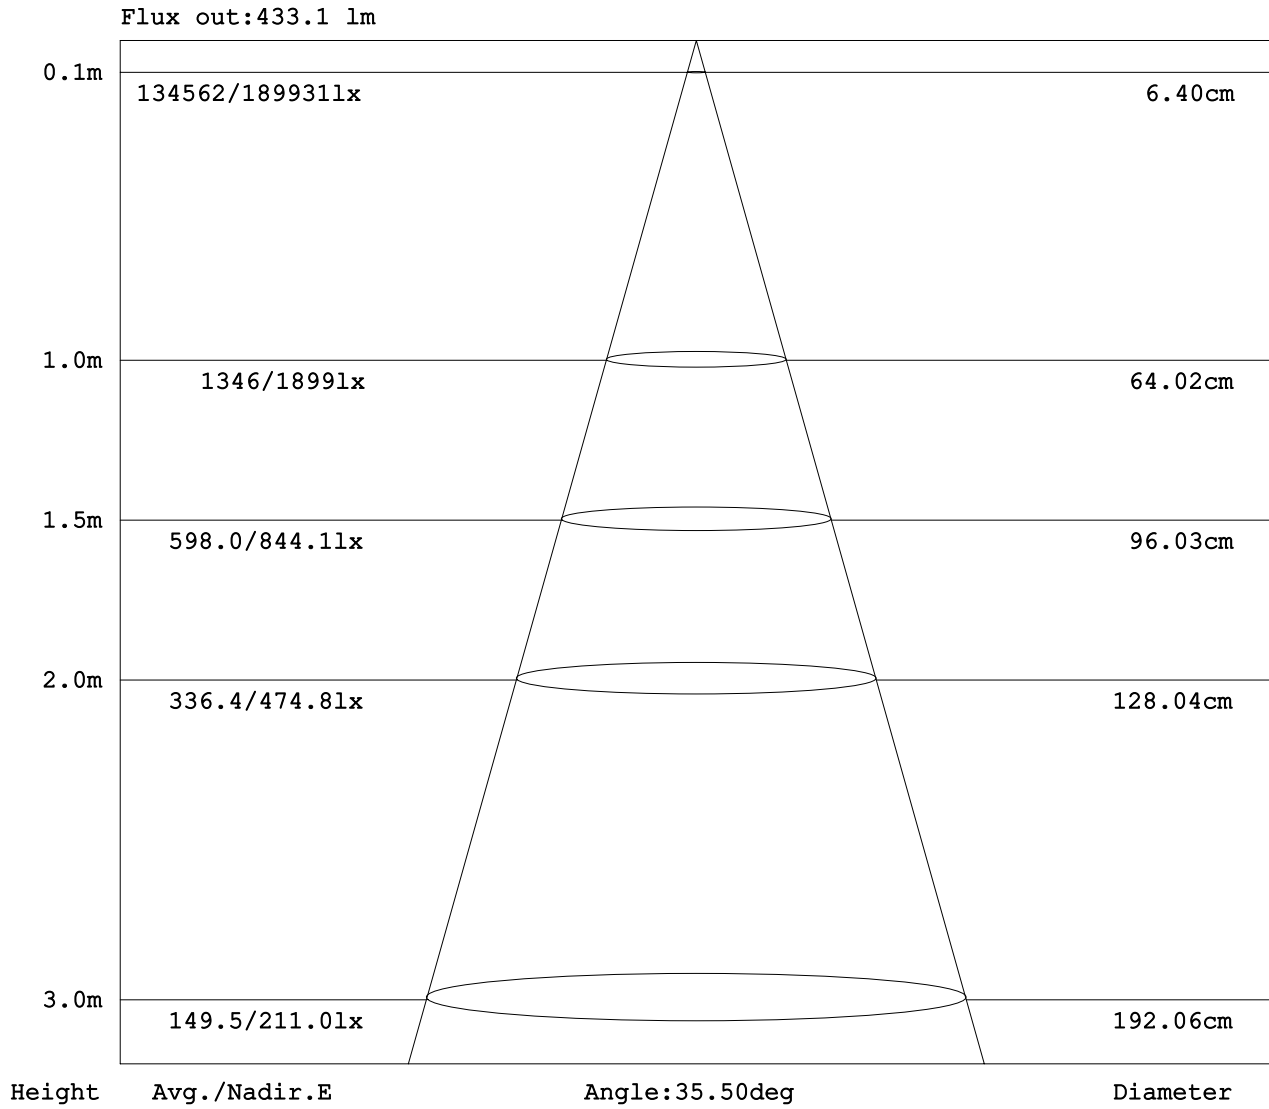

Lamp Type:低压V-LED DPAR38
 Tester:
 Temperature:25.3deg
 Manufactory:CIVILIGHT

Luminaires Type:
 Test Date:2014-08-01
 Humidity:65%
 Remarks: