

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1395	-58.5	39.91	-27.0	220.6	4.5	4083	36.0	139.2	67.5	25.54
-88.5	0.6472	-57.0	42.97	-25.5	244.4	6.0	3956	37.5	131.9	69.0	23.31
-87.0	1.574	-55.5	46.53	-24.0	276.0	7.5	3714	39.0	124.0	70.5	21.23
-85.5	2.816	-54.0	50.70	-22.5	319.2	9.0	3344	40.5	116.2	72.0	19.23
-84.0	4.322	-52.5	55.61	-21.0	386.7	10.5	2858	42.0	108.5	73.5	17.22
-82.5	6.054	-51.0	61.47	-19.5	498.2	12.0	2322	43.5	100.4	75.0	15.23
-81.0	7.870	-49.5	68.24	-18.0	681.3	13.5	1812	45.0	91.61	76.5	13.33
-79.5	9.758	-48.0	75.82	-16.5	961.2	15.0	1358	46.5	82.83	78.0	11.44
-78.0	11.64	-46.5	84.30	-15.0	1338	16.5	978.9	48.0	74.87	79.5	9.539
-76.5	13.57	-45.0	93.07	-13.5	1786	18.0	694.8	49.5	67.78	81.0	7.575
-75.0	15.52	-43.5	101.3	-12.0	2294	19.5	497.2	51.0	61.60	82.5	5.750
-73.5	17.43	-42.0	108.6	-10.5	2831	21.0	381.3	52.5	56.19	84.0	4.058
-72.0	19.40	-40.5	115.5	-9.0	3325	22.5	315.5	54.0	51.42	85.5	2.564
-70.5	21.45	-39.0	122.7	-7.5	3699	24.0	273.3	55.5	47.16	87.0	1.348
-69.0	23.49	-37.5	129.7	-6.0	3948	25.5	244.2	57.0	43.53	88.5	0.4963
-67.5	25.61	-36.0	136.5	-4.5	4083	27.0	221.4	58.5	40.15	90.0	0.0
-66.0	27.77	-34.5	144.2	-3.0	4135	28.5	201.2	60.0	37.38		
-64.5	30.06	-33.0	154.3	-1.5	4146	30.0	183.6	61.5	34.78		
-63.0	32.38	-31.5	166.4	0.0	4146	31.5	168.9	63.0	32.35		
-61.5	34.74	-30.0	181.2	1.5	4143	33.0	156.9	64.5	30.07		
-60.0	37.19	-28.5	199.4	3.0	4132	34.5	147.2	66.0	27.81		

Electricity Parameter:

Current I: 0.1910A Power: 19.07W
Voltage V: 120.8V PF: 0.824


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 1112lm$ Efficiency: $Eff=58.31lm/W$
Diffuse angle: @ (25%): 32.3deg @ (50%): 25.3deg @ (75%): 19.3deg @ (50%): 25.3deg
Diffuse angle: @ (25%): 32.3deg @ (50%): 25.3deg @ (75%): 19.3deg @ (50%): 25.3deg
 $I_{max}=4146cd$ (C=0.0deg,G=-1.0deg) C0-180Plane $I_{max}= 4146cd$ (G=-1.0deg)
C0-180Plane $I_{0}= 4146cd$

Lamp Type: 低压V-LED DPAR38
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-06-30
Humidity: 65%
Remarks:

Average Illuminance Figure

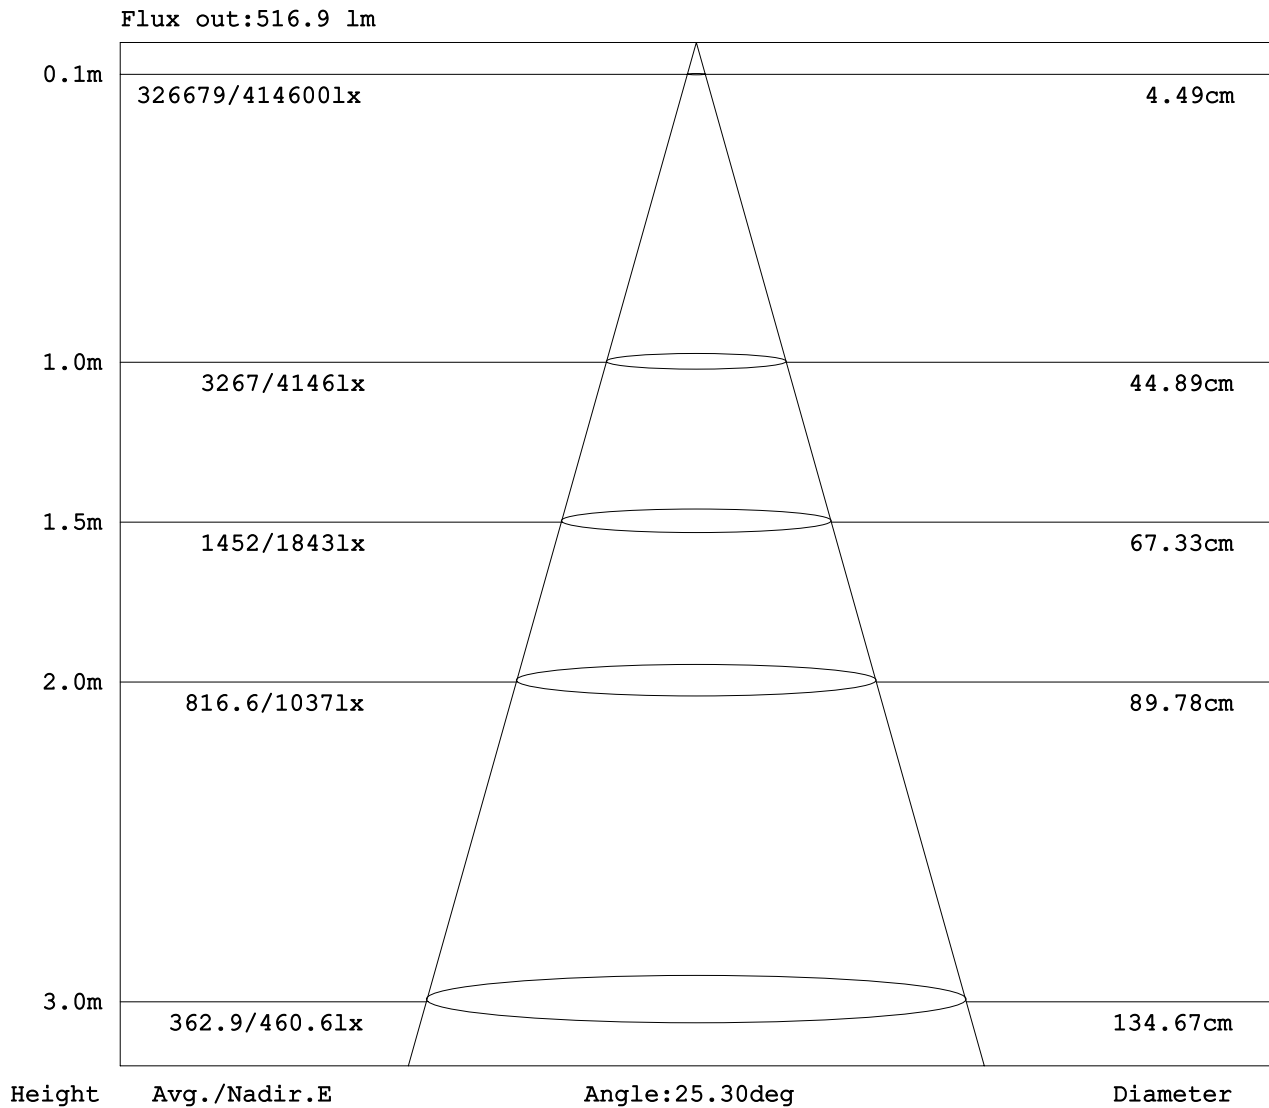

Lamp Type: 低压V-LED DPAR38
 Tester:
 Temperature: 25.3deg
 Manufactory: CIVILIGHT

Luminaires Type:
 Test Date: 2014-06-30
 Humidity: 65%
 Remarks: