

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.2963	-58.5	17.84	-27.0	156.3	4.5	3569	36.0	55.08	67.5	10.37
-88.5	0.6637	-57.0	19.30	-25.5	202.7	6.0	3323	37.5	50.35	69.0	9.494
-87.0	1.188	-55.5	20.90	-24.0	265.9	7.5	3029	39.0	46.64	70.5	8.526
-85.5	1.818	-54.0	22.58	-22.5	355.7	9.0	2695	40.5	43.45	72.0	7.676
-84.0	2.464	-52.5	24.25	-21.0	482.0	10.5	2341	42.0	40.58	73.5	6.862
-82.5	3.058	-51.0	26.04	-19.5	643.5	12.0	1982	43.5	38.03	75.0	6.125
-81.0	3.774	-49.5	27.87	-18.0	840.3	13.5	1637	45.0	35.59	76.5	5.354
-79.5	4.422	-48.0	29.76	-16.5	1074	15.0	1318	46.5	33.21	78.0	4.623
-78.0	5.122	-46.5	31.76	-15.0	1348	16.5	1040	48.0	30.94	79.5	3.938
-76.5	5.807	-45.0	33.69	-13.5	1661	18.0	804.4	49.5	28.68	81.0	3.204
-75.0	6.588	-43.5	35.84	-12.0	2005	19.5	610.2	51.0	26.57	82.5	2.588
-73.5	7.309	-42.0	38.09	-10.5	2370	21.0	439.7	52.5	24.58	84.0	1.946
-72.0	8.164	-40.5	40.63	-9.0	2736	22.5	326.6	54.0	22.66	85.5	1.297
-70.5	8.959	-39.0	43.92	-7.5	3083	24.0	244.4	55.5	20.84	87.0	0.7189
-69.0	9.911	-37.5	47.97	-6.0	3386	25.5	186.3	57.0	19.16	88.5	0.2743
-67.5	10.84	-36.0	53.31	-4.5	3628	27.0	145.4	58.5	17.58	90.0	0.0906
-66.0	11.78	-34.5	60.67	-3.0	3803	28.5	116.7	60.0	16.11		
-64.5	12.88	-33.0	70.50	-1.5	3903	30.0	96.08	61.5	14.85		
-63.0	13.99	-31.5	83.42	0.0	3927	31.5	80.88	63.0	13.62		
-61.5	15.20	-30.0	100.7	1.5	3878	33.0	69.58	64.5	12.48		
-60.0	16.44	-28.5	123.8	3.0	3756	34.5	61.27	66.0	11.41		

Electricity Parameter:

Current I: 0.1540A Power: 16.57W
Voltage V: 120.1V PF: 0.893


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 885.2lm$ Efficiency: $Eff=53.40lm/W$
Diffuse angle: @ (25%): 33.8deg @ (50%): 24.1deg @ (75%): 15.9deg @ (50%): 24.1deg
Diffuse angle: @ (25%): 33.8deg @ (50%): 24.1deg @ (75%): 15.9deg @ (50%): 24.1deg
 $I_{max}=3927cd$ (C=0.0deg,G=-0.5deg) C0-180Plane $I_{max}= 3927cd$ (G=-0.5deg)
C0-180Plane $I_{0}= 3927cd$

Lamp Type:
Tester:
Temperature:25.3deg
Manufactory:EVERFINE

Luminaires Type:CCD218-52025
Test Date:2014-03-11
Humidity:65%
Remarks:

Average Illuminance Figure

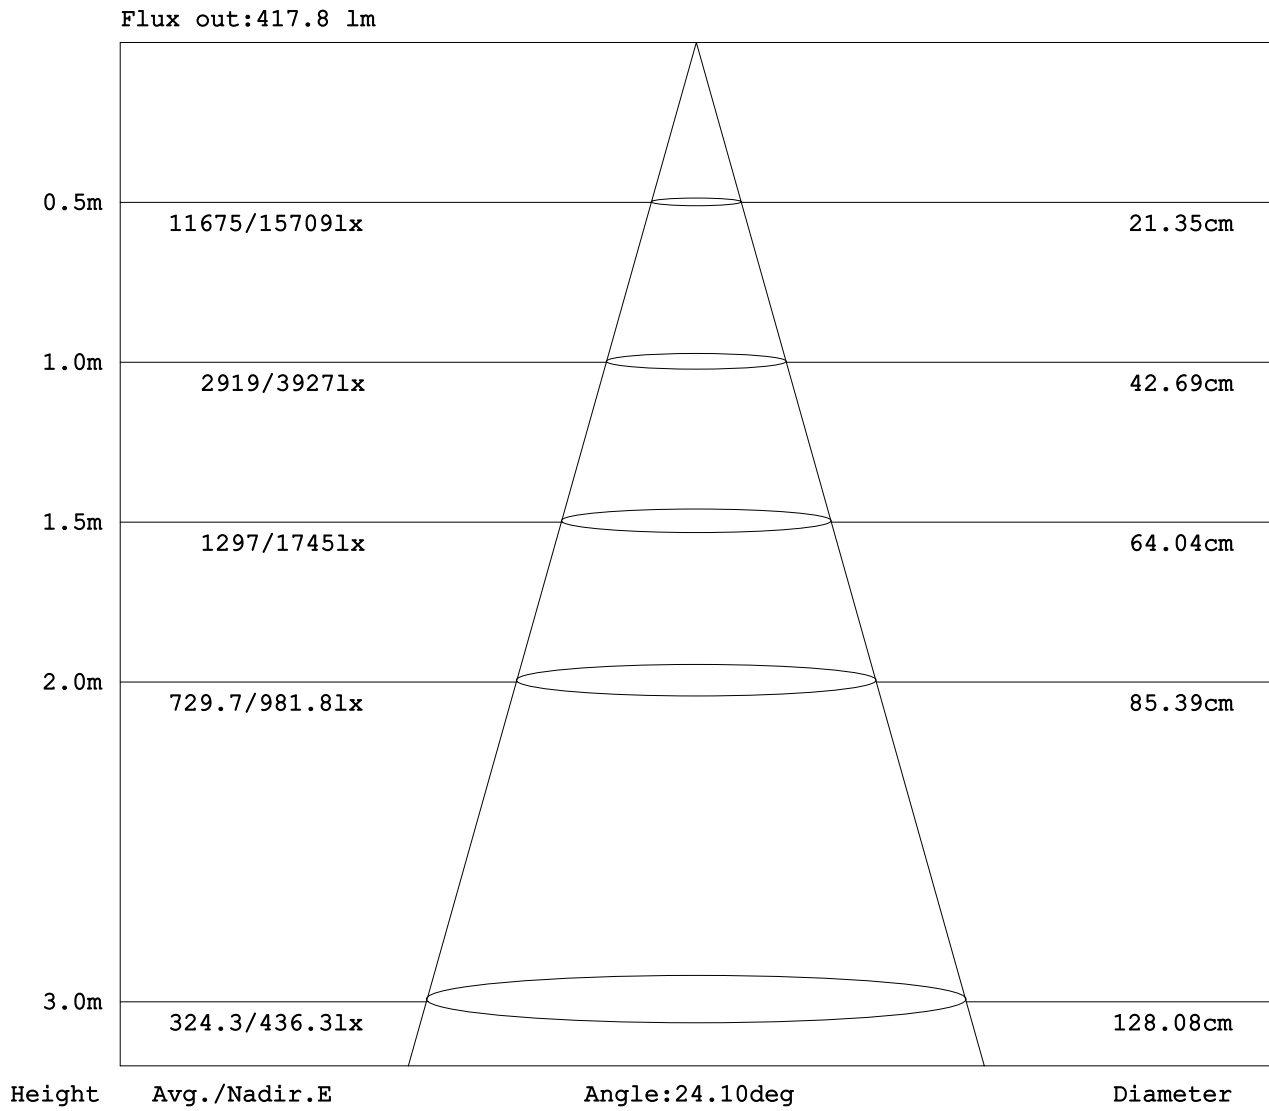

Lamp Type:
Tester:
Temperature:25.3deg
Manufactory:EVERFINE

Luminaires Type:CCD218-52025
Test Date:2014-03-11
Humidity:65%
Remarks: