

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.1917	-58.5	35.17	-27.0	223.8	4.5	6074	36.0	128.0	67.5	23.39
-88.5	0.9614	-57.0	36.76	-25.5	255.8	6.0	4699	37.5	117.7	69.0	21.44
-87.0	2.133	-55.5	38.44	-24.0	295.0	7.5	3556	39.0	108.1	70.5	19.50
-85.5	3.480	-54.0	40.53	-22.5	354.5	9.0	2644	40.5	98.92	72.0	17.70
-84.0	5.036	-52.5	43.21	-21.0	441.5	10.5	1996	42.0	88.33	73.5	15.92
-82.5	6.678	-51.0	46.61	-19.5	557.5	12.0	1549	43.5	77.34	75.0	14.13
-81.0	8.409	-49.5	51.16	-18.0	695.8	13.5	1215	45.0	67.23	76.5	12.35
-79.5	10.17	-48.0	57.18	-16.5	867.5	15.0	958.0	46.5	58.79	78.0	10.59
-78.0	11.85	-46.5	65.13	-15.0	1095	16.5	762.7	48.0	52.41	79.5	8.730
-76.5	13.58	-45.0	74.57	-13.5	1384	18.0	610.6	49.5	47.80	81.0	6.947
-75.0	15.36	-43.5	85.42	-12.0	1754	19.5	473.9	51.0	44.45	82.5	5.302
-73.5	17.07	-42.0	96.46	-10.5	2275	21.0	376.3	52.5	41.94	84.0	3.757
-72.0	18.79	-40.5	105.6	-9.0	3064	22.5	311.0	54.0	39.86	85.5	2.335
-70.5	20.58	-39.0	114.7	-7.5	4053	24.0	263.0	55.5	38.14	87.0	1.102
-69.0	22.46	-37.5	125.1	-6.0	5347	25.5	227.9	57.0	36.57	88.5	0.2697
-67.5	24.35	-36.0	135.4	-4.5	6838	27.0	200.8	58.5	34.94	90.0	0.0208
-66.0	26.27	-34.5	144.8	-3.0	8198	28.5	180.3	60.0	33.04		
-64.5	28.09	-33.0	153.4	-1.5	9052	30.0	165.3	61.5	31.10		
-63.0	29.85	-31.5	164.0	0.0	9239	31.5	154.9	63.0	29.10		
-61.5	31.69	-30.0	178.9	1.5	8691	33.0	147.3	64.5	27.26		
-60.0	33.53	-28.5	198.5	3.0	7530	34.5	138.3	66.0	25.33		

Electricity Parameter:

Current I: 0.1900A Power: 17.82W
Voltage V: 122.5V PF: 0.765


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 20.0deg @ (50%): 12.8deg @ (75%): 7.9deg @ (50%): 12.8deg
Diffuse angle: @ (25%): 20.1deg @ (50%): 12.8deg @ (75%): 8.0deg @ (50%): 12.8deg
Imax=9253cd (C=0.0deg,G=-0.5deg) C0-180Plane Imax= 9253cd(G=-0.5deg)
C0-180Plane I0= 9239cd

Lamp Type:DPAR38 NP01Q17
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-09-10
Humidity:65%
Remarks:

Average Illuminance Figure

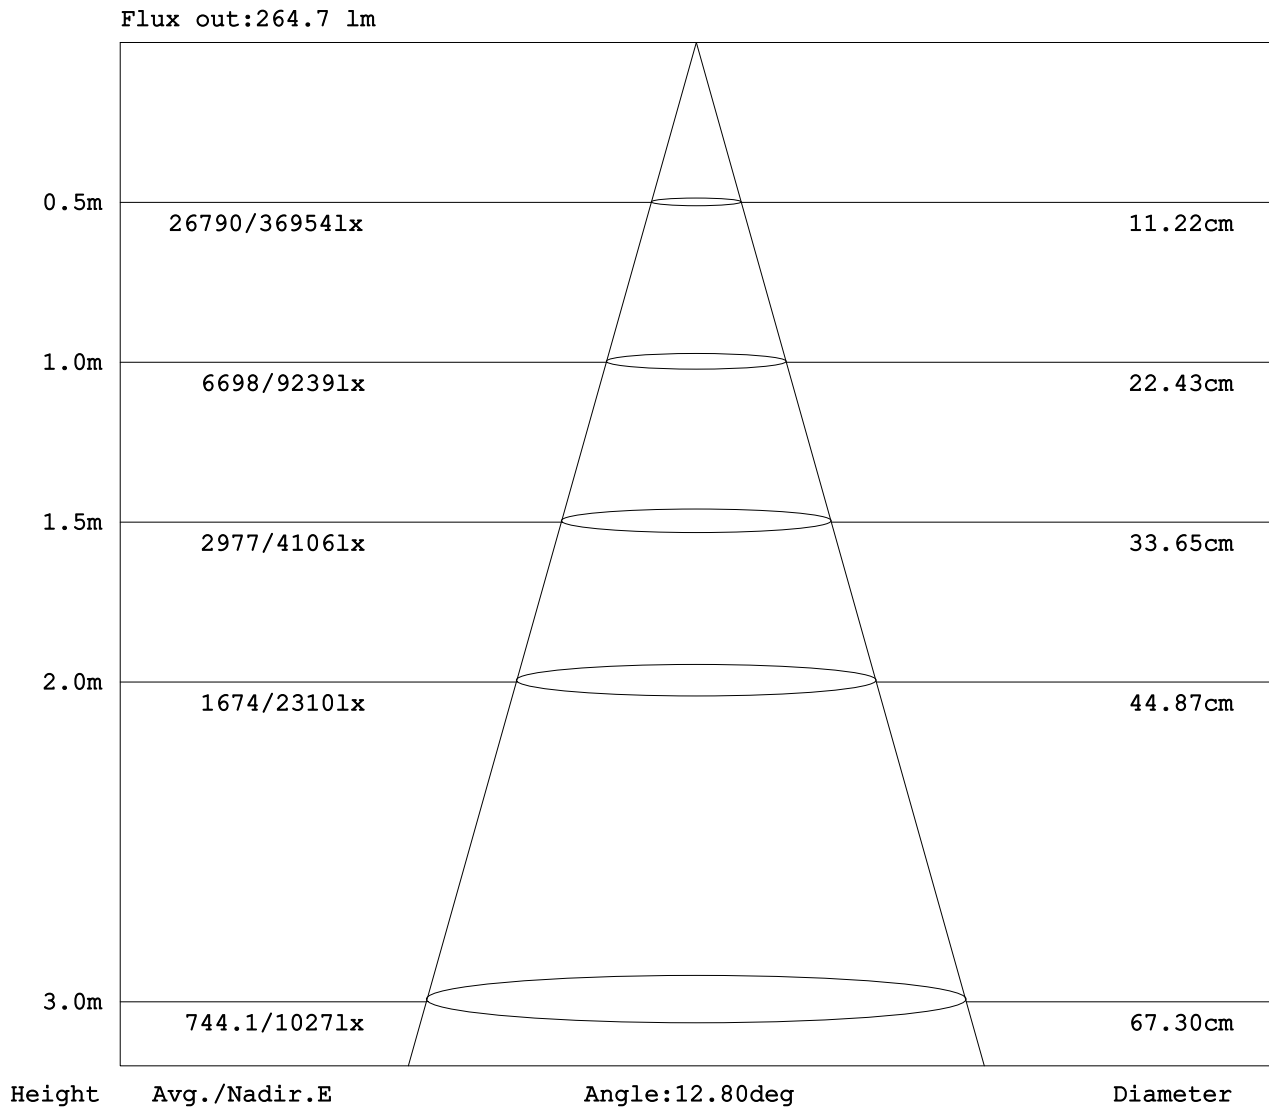

Lamp Type:DPAR38 NP01Q17
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-09-10
 Humidity:65%
 Remarks: