

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.8193	-58.5	52.24	-27.0	280.2	4.5	4761	36.0	157.0	67.5	28.82
-88.5	1.973	-57.0	56.70	-25.5	313.5	6.0	4510	37.5	148.2	69.0	26.26
-87.0	3.495	-55.5	61.56	-24.0	363.8	7.5	4093	39.0	139.3	70.5	23.79
-85.5	5.366	-54.0	67.06	-22.5	442.1	9.0	3521	40.5	130.4	72.0	21.41
-84.0	7.396	-52.5	73.66	-21.0	568.6	10.5	2886	42.0	121.1	73.5	19.06
-82.5	9.701	-51.0	81.51	-19.5	774.2	12.0	2278	43.5	111.2	75.0	16.58
-81.0	11.97	-49.5	90.59	-18.0	1091	13.5	1738	45.0	101.0	76.5	14.15
-79.5	14.42	-48.0	100.7	-16.5	1528	15.0	1277	46.5	91.39	78.0	11.73
-78.0	16.88	-46.5	111.0	-15.0	2063	16.5	919.6	48.0	82.94	79.5	9.438
-76.5	19.20	-45.0	120.2	-13.5	2656	18.0	669.0	49.5	75.36	81.0	7.219
-75.0	21.53	-43.5	128.2	-12.0	3263	19.5	499.6	51.0	68.73	82.5	5.194
-73.5	23.89	-42.0	136.0	-10.5	3835	21.0	399.6	52.5	62.85	84.0	3.348
-72.0	26.29	-40.5	144.3	-9.0	4302	22.5	340.4	54.0	57.65	85.5	1.838
-70.5	28.77	-39.0	152.3	-7.5	4613	24.0	299.5	55.5	53.19	87.0	0.7192
-69.0	31.44	-37.5	160.1	-6.0	4795	25.5	268.0	57.0	49.37	88.5	0.0945
-67.5	34.02	-36.0	169.4	-4.5	4867	27.0	241.8	58.5	46.03	90.0	0.0366
-66.0	36.66	-34.5	180.6	-3.0	4872	28.5	220.1	60.0	42.99		
-64.5	39.41	-33.0	193.9	-1.5	4870	30.0	202.4	61.5	39.93		
-63.0	42.24	-31.5	209.5	0.0	4874	31.5	187.8	63.0	37.11		
-61.5	45.14	-30.0	229.0	1.5	4888	33.0	175.9	64.5	34.35		
-60.0	48.43	-28.5	252.6	3.0	4877	34.5	165.9	66.0	31.57		

Electricity Parameter:

Current I: 0.2000A Power: 20.05W
Voltage V: 123.4V PF: 0.812


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 32.6deg @ (50%): 25.5deg @ (75%): 19.5deg @ (50%): 25.5deg
Diffuse angle: @ (25%): 32.7deg @ (50%): 25.5deg @ (75%): 19.5deg @ (50%): 25.5deg
Imax=4895cd (C=0.0deg,G=2.0deg) C0-180Plane Imax= 4895cd(G=2.0deg)
C0-180Plane I0= 4874cd

Lamp Type:DPAR38 NP01Q19
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-06-30
Humidity:65%
Remarks:

Average Illuminance Figure

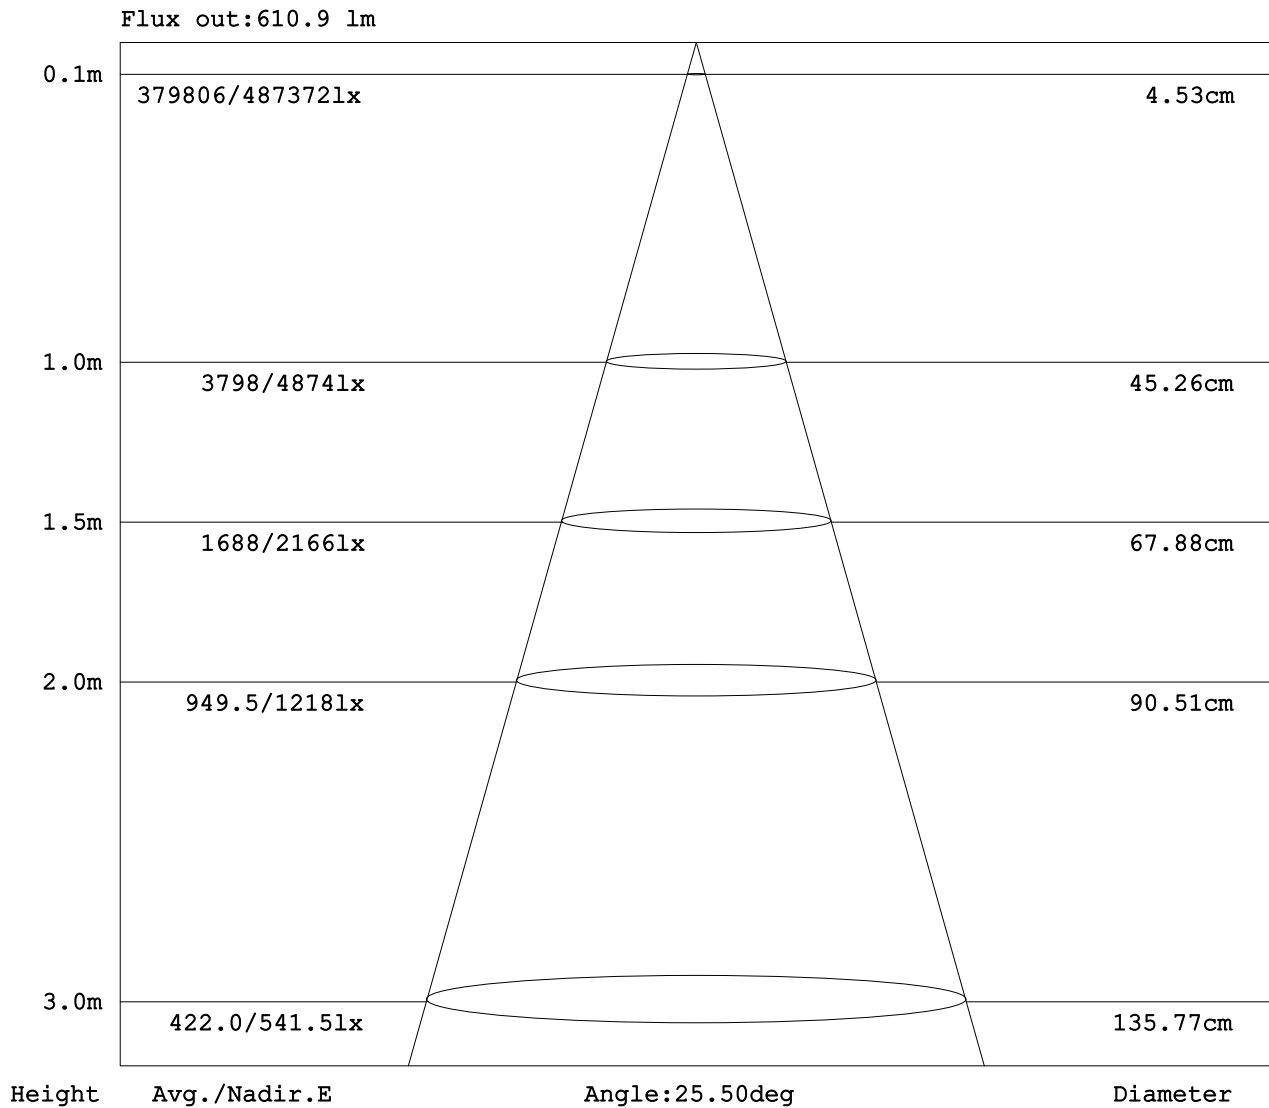

Lamp Type:DPAR38 NP01Q19
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-06-30
 Humidity:65%
 Remarks: