

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.2092	-58.5	35.54	-27.0	220.8	4.5	5974	36.0	125.5	67.5	23.12
-88.5	0.9089	-57.0	37.26	-25.5	254.1	6.0	4586	37.5	115.5	69.0	21.25
-87.0	2.080	-55.5	38.96	-24.0	292.2	7.5	3448	39.0	106.5	70.5	19.29
-85.5	3.393	-54.0	40.98	-22.5	348.3	9.0	2554	40.5	97.78	72.0	17.54
-84.0	4.950	-52.5	43.54	-21.0	426.0	10.5	1931	42.0	87.79	73.5	15.77
-82.5	6.659	-51.0	46.95	-19.5	534.8	12.0	1507	43.5	77.16	75.0	14.00
-81.0	8.322	-49.5	51.52	-18.0	669.3	13.5	1186	45.0	67.26	76.5	12.21
-79.5	10.07	-48.0	57.69	-16.5	841.2	15.0	935.3	46.5	58.66	78.0	10.48
-78.0	11.84	-46.5	65.64	-15.0	1072	16.5	742.7	48.0	52.05	79.5	8.668
-76.5	13.68	-45.0	75.39	-13.5	1375	18.0	589.1	49.5	47.24	81.0	6.878
-75.0	15.51	-43.5	86.12	-12.0	1774	19.5	453.1	51.0	43.71	82.5	5.252
-73.5	17.20	-42.0	95.70	-10.5	2326	21.0	363.1	52.5	41.07	84.0	3.679
-72.0	18.96	-40.5	102.7	-9.0	3135	22.5	299.6	54.0	38.90	85.5	2.248
-70.5	20.76	-39.0	110.3	-7.5	4126	24.0	254.2	55.5	37.01	87.0	1.030
-69.0	22.60	-37.5	119.2	-6.0	5375	25.5	222.3	57.0	35.23	88.5	0.2817
-67.5	24.64	-36.0	128.2	-4.5	6804	27.0	198.7	58.5	33.67	90.0	0.0889
-66.0	26.62	-34.5	137.3	-3.0	8144	28.5	180.4	60.0	32.07		
-64.5	28.31	-33.0	146.8	-1.5	9000	30.0	166.5	61.5	30.29		
-63.0	30.07	-31.5	158.6	0.0	9177	31.5	155.5	63.0	28.35		
-61.5	32.02	-30.0	174.1	1.5	8608	33.0	145.9	64.5	26.61		
-60.0	33.83	-28.5	194.4	3.0	7435	34.5	136.0	66.0	24.89		

Electricity Parameter:

Current I: 0.1690A Power: 17.16W
Voltage V: 121.9V PF: 0.830


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 20.0deg @ (50%): 12.7deg @ (75%): 7.8deg @ (50%): 12.7deg
Diffuse angle: @ (25%): 20.0deg @ (50%): 12.8deg @ (75%): 7.9deg @ (50%): 12.8deg
Imax=9209cd (C=0.0deg,G=-0.5deg) C0-180Plane Imax= 9209cd(G=-0.5deg)
C0-180Plane I0= 9177cd

Lamp Type:DPAR38 WP01Q17
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:
Test Date:2014-09-09
Humidity:65%
Remarks:

Average Illuminance Figure

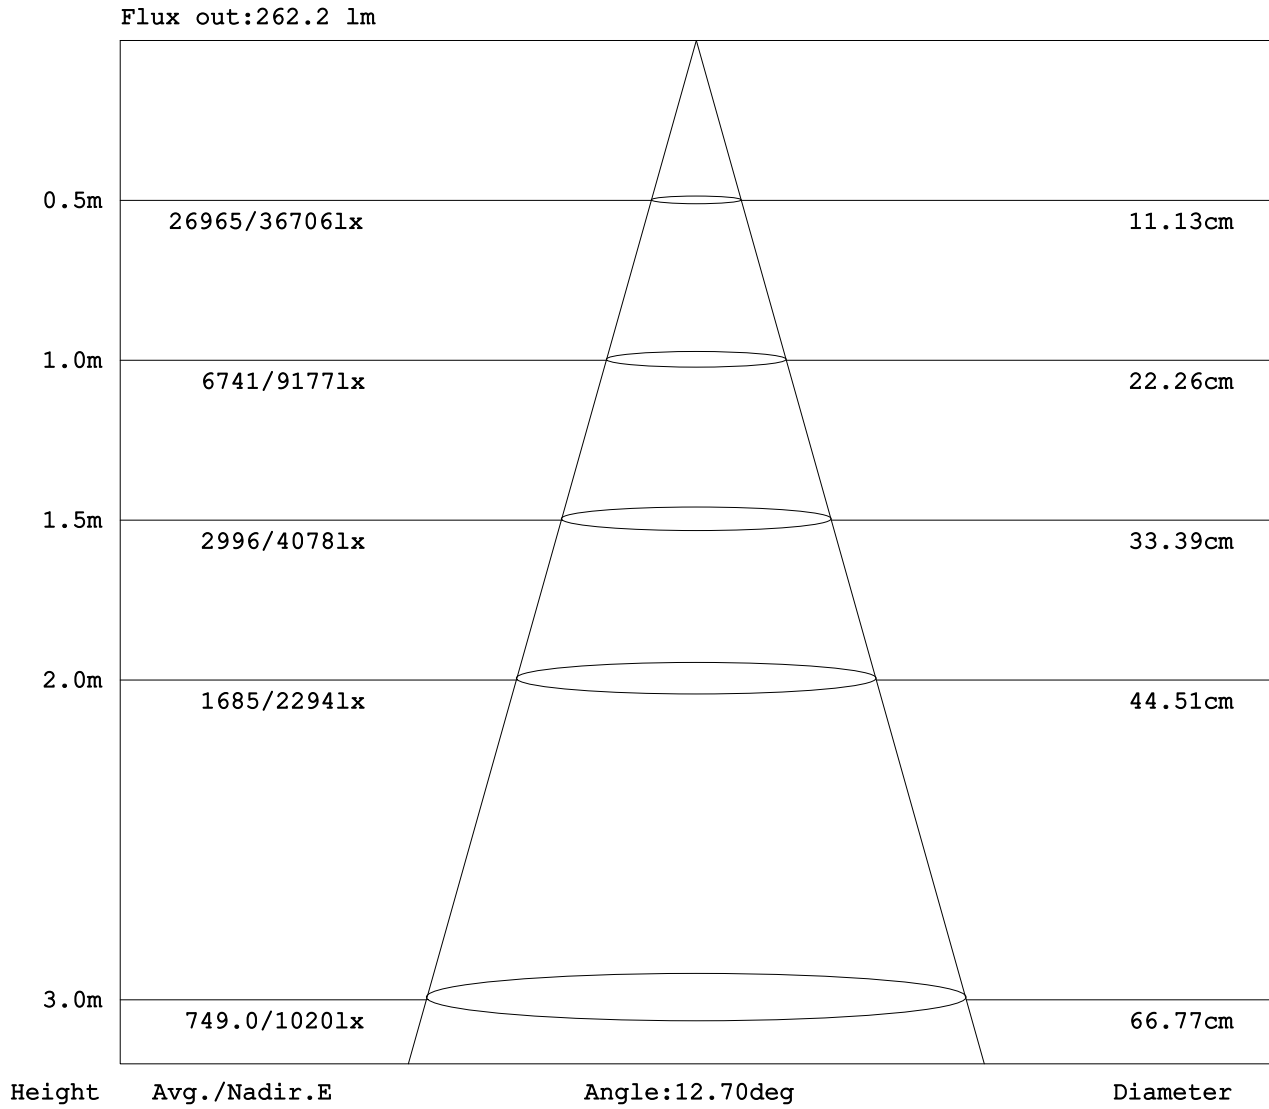

Lamp Type:DPAR38 WP01Q17
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:
 Test Date:2014-09-09
 Humidity:65%
 Remarks: