

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.2092	-58.5	34.25	-27.0	164.6	4.5	4971	36.0	113.5	67.5	22.79
-88.5	0.5247	-57.0	36.60	-25.5	179.1	6.0	4831	37.5	108.9	69.0	20.90
-87.0	1.294	-55.5	39.24	-24.0	195.4	7.5	4433	39.0	104.1	70.5	19.05
-85.5	2.379	-54.0	42.09	-22.5	218.3	9.0	3782	40.5	99.67	72.0	17.29
-84.0	3.726	-52.5	45.42	-21.0	252.9	10.5	2917	42.0	95.12	73.5	15.59
-82.5	5.178	-51.0	49.48	-19.5	302.6	12.0	2028	43.5	88.35	75.0	13.80
-81.0	6.750	-49.5	54.29	-18.0	378.8	13.5	1341	45.0	79.61	76.5	12.10
-79.5	8.413	-48.0	60.12	-16.5	509.7	15.0	893.1	46.5	70.40	78.0	10.45
-78.0	10.12	-46.5	67.18	-15.0	728.9	16.5	622.2	48.0	62.37	79.5	8.752
-76.5	11.71	-45.0	75.11	-13.5	1080	18.0	437.2	49.5	56.13	81.0	7.017
-75.0	13.46	-43.5	83.20	-12.0	1633	19.5	339.1	51.0	51.23	82.5	5.389
-73.5	15.13	-42.0	90.55	-10.5	2412	21.0	275.8	52.5	47.25	84.0	3.847
-72.0	16.80	-40.5	96.80	-9.0	3230	22.5	233.6	54.0	43.84	85.5	2.471
-70.5	18.53	-39.0	102.8	-7.5	3928	24.0	205.2	55.5	40.75	87.0	1.309
-69.0	20.27	-37.5	108.6	-6.0	4364	25.5	185.5	57.0	37.85	88.5	0.5119
-67.5	22.12	-36.0	112.7	-4.5	4580	27.0	170.3	58.5	35.36	90.0	0.0
-66.0	24.04	-34.5	116.4	-3.0	4683	28.5	155.1	60.0	33.06		
-64.5	25.95	-33.0	121.4	-1.5	4745	30.0	142.2	61.5	30.86		
-63.0	27.89	-31.5	128.6	0.0	4852	31.5	132.3	63.0	28.74		
-61.5	29.94	-30.0	138.0	1.5	4937	33.0	124.6	64.5	26.68		
-60.0	32.08	-28.5	150.2	3.0	4995	34.5	118.5	66.0	24.71		

Electricity Parameter:

Current I: 0.1700A Power: 17.79W
Voltage V: 119.5V PF: 0.875


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 972.9lm$ Efficiency: $Eff=54.67lm/W$
Diffuse angle: @ (25%): 26.6deg @ (50%): 21.4deg @ (75%): 16.9deg @ (50%): 21.4deg
Diffuse angle: @ (25%): 26.8deg @ (50%): 21.7deg @ (75%): 17.3deg @ (50%): 21.7deg
 $I_{max}=5001cd$ (C=0.0deg,G=3.5deg) C0-180Plane $I_{max}= 5001cd$ (G=3.5deg)
C0-180Plane $I_{0}= 4852cd$

Lamp Type: 低压V-LED DPAR38
Tester:
Temperature: 25.3deg
Manufactory: CIVILIGHT

Luminaires Type:
Test Date: 2014-06-25
Humidity: 65%
Remarks:

Average Illuminance Figure

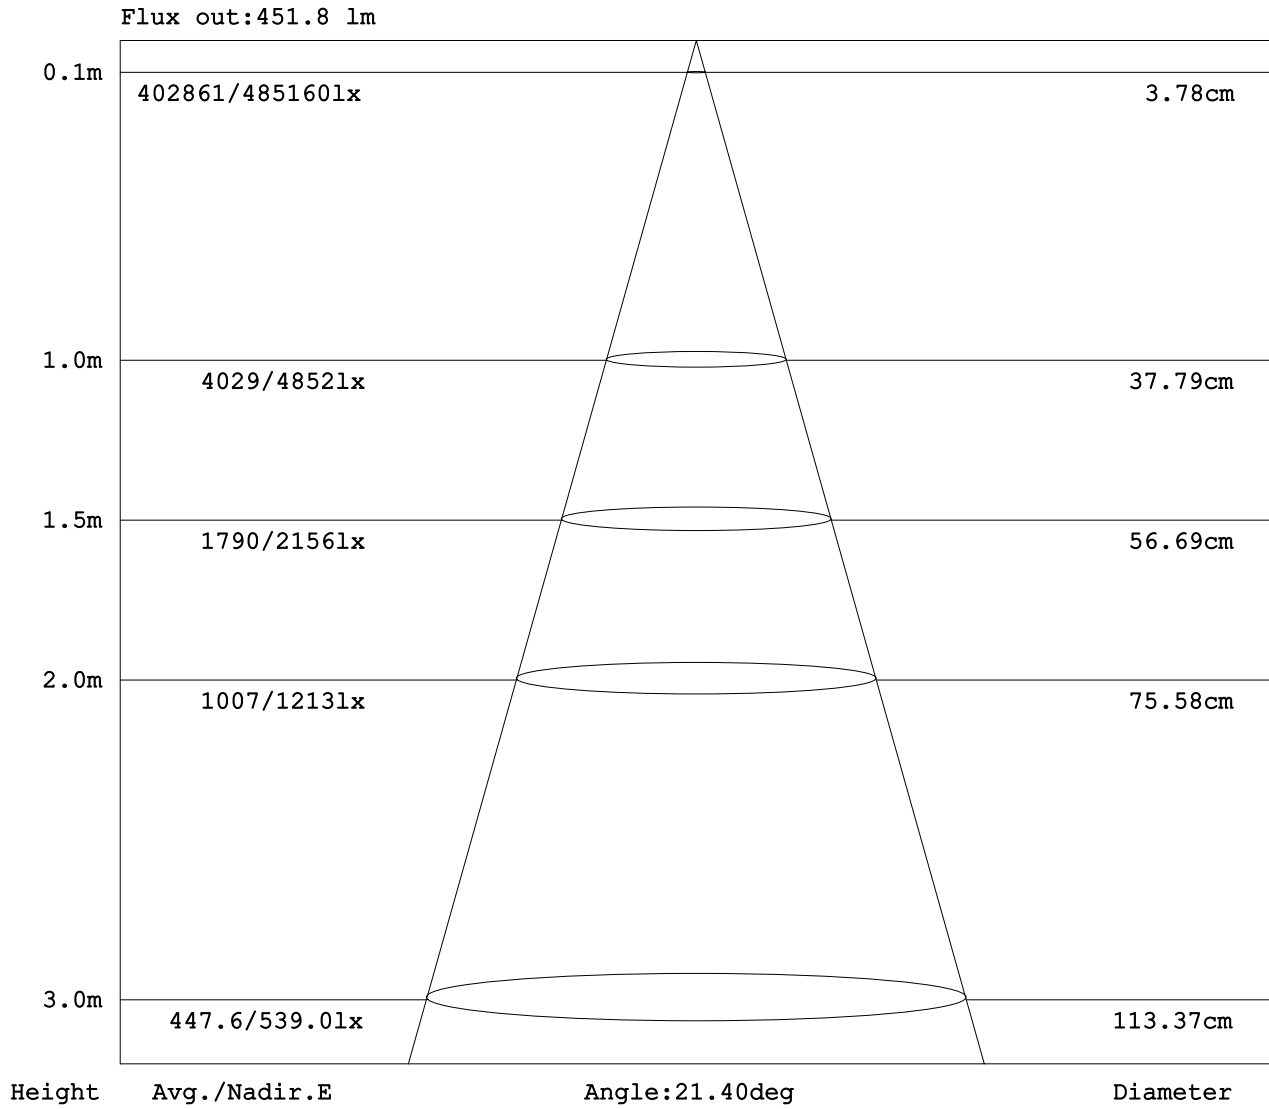

Lamp Type: 低压V-LED DPAR38
 Tester:
 Temperature:25.3deg
 Manufactory:CIVILIGHT

Luminaires Type:
 Test Date:2014-06-25
 Humidity:65%
 Remarks: