

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	1.272	-58.5	42.81	-27.0	573.8	4.5	2329	36.0	220.9	67.5	28.23
-88.5	2.271	-57.0	45.34	-25.5	675.1	6.0	2253	37.5	176.8	69.0	26.28
-87.0	4.175	-55.5	48.08	-24.0	797.4	7.5	2197	39.0	139.9	70.5	24.31
-85.5	5.887	-54.0	50.66	-22.5	933.9	9.0	2127	40.5	111.4	72.0	22.34
-84.0	7.601	-52.5	53.18	-21.0	1078	10.5	2033	42.0	90.44	73.5	20.35
-82.5	9.400	-51.0	55.83	-19.5	1233	12.0	1930	43.5	77.59	75.0	18.48
-81.0	11.23	-49.5	58.69	-18.0	1397	13.5	1832	45.0	69.66	76.5	16.41
-79.5	13.07	-48.0	62.11	-16.5	1565	15.0	1719	46.5	64.30	78.0	14.50
-78.0	14.99	-46.5	66.00	-15.0	1731	16.5	1568	48.0	60.05	79.5	12.61
-76.5	16.86	-45.0	71.10	-13.5	1872	18.0	1407	49.5	56.55	81.0	10.54
-75.0	18.87	-43.5	78.03	-12.0	1977	19.5	1259	51.0	53.50	82.5	8.608
-73.5	20.97	-42.0	88.57	-10.5	2068	21.0	1118	52.5	50.79	84.0	6.582
-72.0	22.97	-40.5	105.6	-9.0	2167	22.5	982.6	54.0	48.19	85.5	4.799
-70.5	25.06	-39.0	130.6	-7.5	2253	24.0	850.5	55.5	45.58	87.0	3.009
-69.0	26.96	-37.5	164.3	-6.0	2299	25.5	725.8	57.0	43.29	88.5	1.389
-67.5	28.86	-36.0	207.1	-4.5	2330	27.0	617.3	58.5	40.92	90.0	0.0
-66.0	30.89	-34.5	255.4	-3.0	2381	28.5	526.7	60.0	38.68		
-64.5	33.06	-33.0	304.2	-1.5	2437	30.0	441.8	61.5	36.43		
-63.0	35.33	-31.5	361.1	0.0	2474	31.5	377.8	63.0	34.34		
-61.5	37.69	-30.0	419.2	1.5	2473	33.0	322.1	64.5	32.29		
-60.0	40.13	-28.5	488.1	3.0	2414	34.5	268.9	66.0	30.26		

Electricity Parameter:

Current I: 0.2020A Power: 20.67W
Voltage V: 122.1V PF: 0.837


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 53.1deg @ (50%): 39.1deg @ (75%): 26.6deg @ (50%): 39.1deg
Diffuse angle: @ (25%): 53.2deg @ (50%): 39.1deg @ (75%): 26.7deg @ (50%): 39.1deg
Imax=2479cd (C=0.0deg,G=0.5deg) C0-180Plane Imax= 2479cd(G=0.5deg)
C0-180Plane I0= 2474cd

Lamp Type:DPAR38 WP01Q19
Tester:Kevin Li
Temperature:25.3deg
Manufactory:CIVILIGHT

Luminaires Type:
Test Date:2013-12-31
Humidity:65%
Remarks:

Average Illuminance Figure

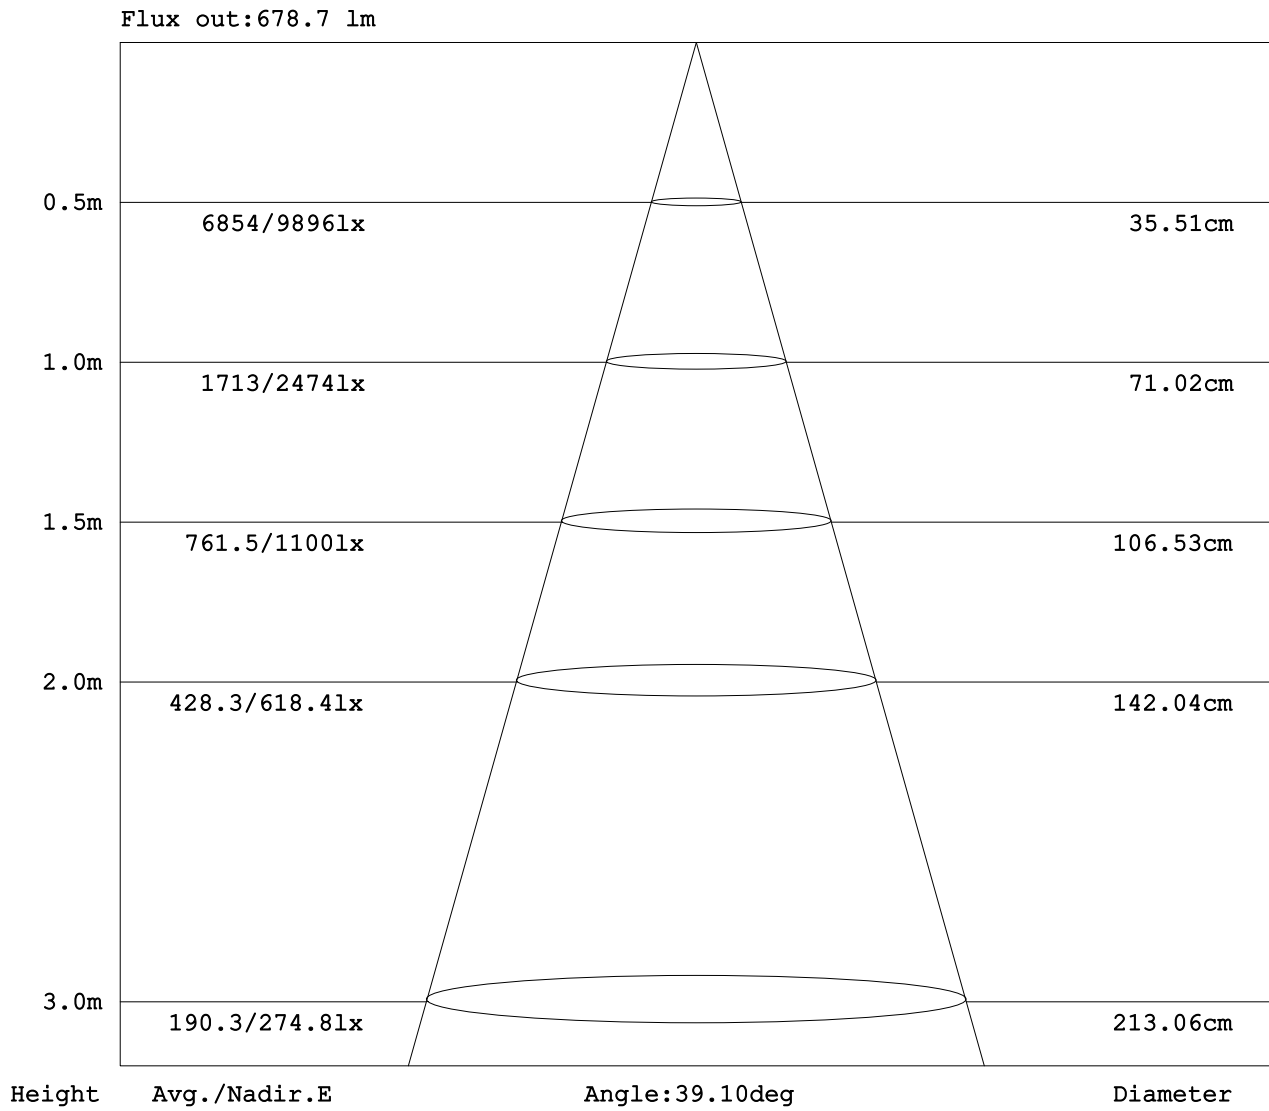

Lamp Type:DPAR38 WP01Q19
 Tester:Kevin Li
 Temperature:25.3deg
 Manufactory:CIVILIGHT

Luminaires Type:
 Test Date:2013-12-31
 Humidity:65%
 Remarks: