

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.0349	-58.5	8.475	-27.0	132.7	4.5	1934	36.0	43.93	67.5	4.695
-88.5	0.0699	-57.0	9.281	-25.5	169.7	6.0	1795	37.5	39.22	69.0	3.985
-87.0	0.1223	-55.5	10.27	-24.0	212.2	7.5	1661	39.0	35.71	70.5	3.321
-85.5	0.1921	-54.0	11.73	-22.5	260.8	9.0	1525	40.5	32.35	72.0	2.758
-84.0	0.2620	-52.5	13.61	-21.0	316.7	10.5	1364	42.0	29.84	73.5	2.158
-82.5	0.3674	-51.0	15.73	-19.5	386.3	12.0	1198	43.5	28.62	75.0	1.613
-81.0	0.4730	-49.5	17.78	-18.0	477.5	13.5	1026	45.0	27.31	76.5	1.103
-79.5	0.5771	-48.0	19.90	-16.5	610.8	15.0	852.6	46.5	26.13	78.0	0.7752
-78.0	0.6830	-46.5	23.03	-15.0	759.3	16.5	695.2	48.0	23.29	79.5	0.6676
-76.5	0.8462	-45.0	25.44	-13.5	934.0	18.0	561.3	49.5	20.76	81.0	0.5454
-75.0	1.249	-43.5	27.11	-12.0	1111	19.5	454.0	51.0	18.46	82.5	0.4254
-73.5	1.773	-42.0	28.52	-10.5	1284	21.0	374.8	52.5	15.59	84.0	0.3334
-72.0	2.281	-40.5	30.46	-9.0	1448	22.5	313.1	54.0	13.48	85.5	0.2461
-70.5	2.823	-39.0	33.77	-7.5	1599	24.0	264.3	55.5	11.70	87.0	0.1782
-69.0	3.419	-37.5	36.58	-6.0	1740	25.5	218.4	57.0	10.32	88.5	0.1064
-67.5	4.050	-36.0	40.14	-4.5	1865	27.0	175.5	58.5	9.388	90.0	0.0208
-66.0	4.720	-34.5	45.16	-3.0	1994	28.5	137.9	60.0	8.584		
-64.5	5.413	-33.0	52.35	-1.5	2099	30.0	105.3	61.5	7.732		
-63.0	6.084	-31.5	64.05	0.0	2131	31.5	80.96	63.0	6.924		
-61.5	6.870	-30.0	79.70	1.5	2117	33.0	63.60	64.5	6.125		
-60.0	7.639	-28.5	102.0	3.0	2060	34.5	51.28	66.0	5.428		

Electricity Parameter:

Current I: 0.1130A Power: 9.151W
Voltage V: 120.6V PF: 0.670


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 35.6deg @ (50%): 25.4deg @ (75%): 15.7deg @ (50%): 25.4deg
Diffuse angle: @ (25%): 35.6deg @ (50%): 25.4deg @ (75%): 15.7deg @ (50%): 25.4deg
Imax=2131cd (C=0.0deg,G=0.0deg) C0-180Plane Imax= 2131cd(G=0.0deg)
C0-180Plane I0= 2131cd

Lamp Type:KP01Q9
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:HALED DGU10
Test Date:2014-10-14
Humidity:65%
Remarks:

Average Illuminance Figure

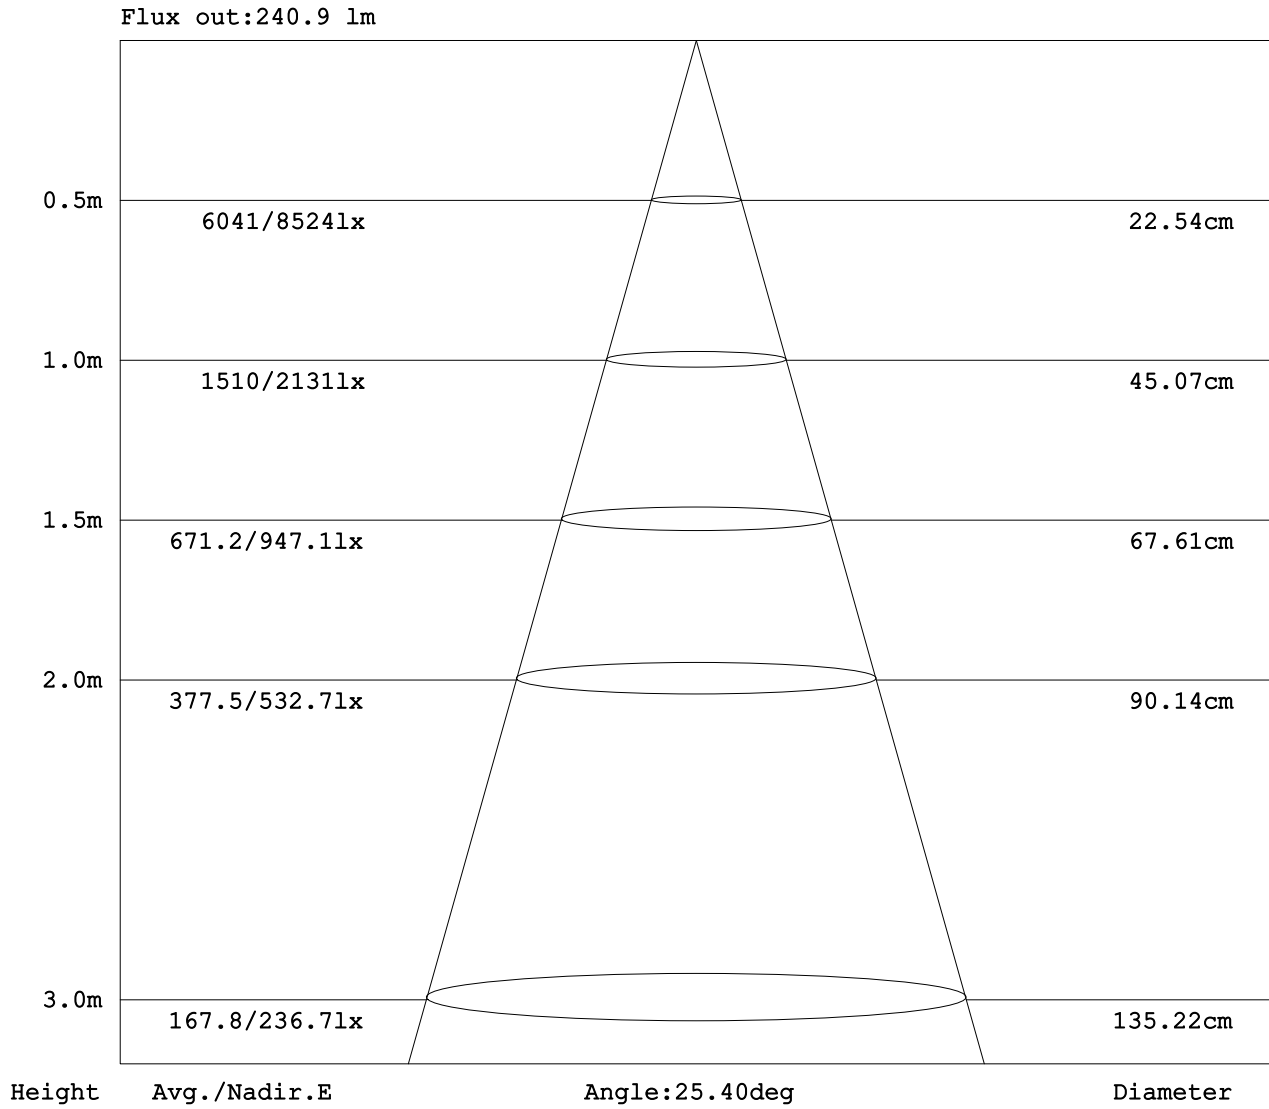

Lamp Type:KP01Q9
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:HALED DGU10
 Test Date:2014-10-14
 Humidity:65%
 Remarks: