

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.0	-58.5	7.626	-27.0	128.9	4.5	1953	36.0	49.23	67.5	5.012
-88.5	0.0	-57.0	8.561	-25.5	165.0	6.0	1842	37.5	43.20	69.0	4.247
-87.0	0.0351	-55.5	9.557	-24.0	207.2	7.5	1728	39.0	39.17	70.5	3.579
-85.5	0.1224	-54.0	10.66	-22.5	253.9	9.0	1595	40.5	35.83	72.0	2.981
-84.0	0.1928	-52.5	12.29	-21.0	300.4	10.5	1450	42.0	32.82	73.5	2.437
-82.5	0.2802	-51.0	14.19	-19.5	363.1	12.0	1305	43.5	30.60	75.0	1.912
-81.0	0.3684	-49.5	16.37	-18.0	439.8	13.5	1153	45.0	28.57	76.5	1.437
-79.5	0.4899	-48.0	18.53	-16.5	536.5	15.0	990.8	46.5	26.30	78.0	0.9808
-78.0	0.5948	-46.5	20.59	-15.0	657.7	16.5	827.8	48.0	23.81	79.5	0.7374
-76.5	0.6648	-45.0	22.87	-13.5	808.2	18.0	674.7	49.5	21.09	81.0	0.6500
-75.0	0.8285	-43.5	24.70	-12.0	966.4	19.5	543.8	51.0	18.74	82.5	0.5625
-73.5	1.268	-42.0	26.62	-10.5	1123	21.0	431.6	52.5	16.58	84.0	0.4751
-72.0	1.792	-40.5	28.45	-9.0	1276	22.5	353.0	54.0	14.33	85.5	0.3703
-70.5	2.335	-39.0	31.05	-7.5	1417	24.0	290.1	55.5	12.42	87.0	0.2963
-69.0	2.896	-37.5	34.49	-6.0	1559	25.5	238.7	57.0	10.87	88.5	0.2092
-67.5	3.457	-36.0	38.37	-4.5	1702	27.0	193.4	58.5	9.841	90.0	0.1743
-66.0	4.051	-34.5	43.45	-3.0	1830	28.5	153.4	60.0	8.841		
-64.5	4.683	-33.0	50.59	-1.5	1959	30.0	118.9	61.5	7.972		
-63.0	5.342	-31.5	61.55	0.0	2025	31.5	91.25	63.0	7.238		
-61.5	5.998	-30.0	77.73	1.5	2044	33.0	72.71	64.5	6.473		
-60.0	6.805	-28.5	99.45	3.0	2039	34.5	58.61	66.0	5.704		

**Electricity Parameter:**

Current I: 0.1080A      Power: 8.855W  
Voltage V: 121.7V      PF: 0.671


**Optical Parameter (Distance=2.900m) :**

Diffuse angle: @ (25%): 36.7deg @ (50%): 26.1deg @ (75%): 15.8deg @ (50%): 26.1deg  
Diffuse angle: @ (25%): 36.8deg @ (50%): 26.3deg @ (75%): 16.1deg @ (50%): 26.3deg  
Imax=2047cd (C=0.0deg,G=2.0deg)      C0-180Plane Imax= 2047cd(G=2.0deg)  
C0-180Plane I0= 2025cd

Lamp Type:WP01Q9  
Tester:  
Temperature:25.3deg  
Manufactory:

Luminaires Type:HALED DGU10  
Test Date:2014-10-17  
Humidity:65%  
Remarks:

**Average Illuminance Figure**

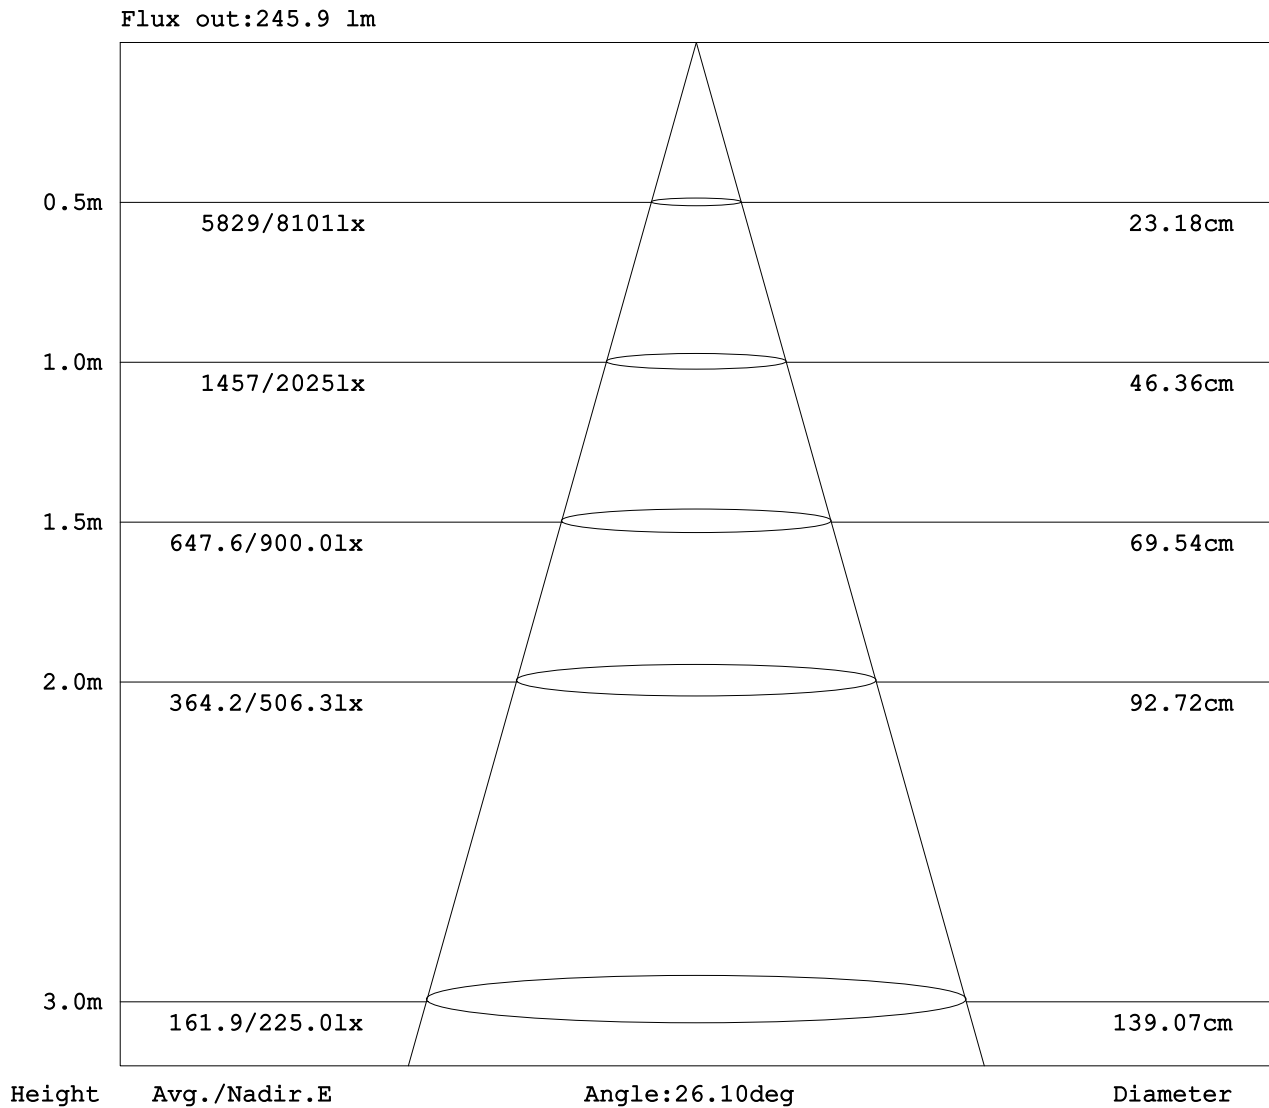

Lamp Type:WP01Q9  
 Tester:  
 Temperature:25.3deg  
 Manufactory:

Luminaires Type:HALED DGU10  
 Test Date:2014-10-17  
 Humidity:65%  
 Remarks: