

Intensity data:(deg , cd) C0-180

| | A | | I A | | I A | | I A | | I A | | I A |
|-------|--------|-------|-------|-------|-------|------|-------|------|-------|------|--------|
| -90.0 | 0.0349 | -58.5 | 8.982 | -27.0 | 168.2 | 4.5 | 1362 | 36.0 | 52.59 | 67.5 | 4.869 |
| -88.5 | 0.0523 | -57.0 | 10.14 | -25.5 | 219.6 | 6.0 | 1304 | 37.5 | 45.45 | 69.0 | 4.055 |
| -87.0 | 0.1051 | -55.5 | 11.46 | -24.0 | 276.1 | 7.5 | 1239 | 39.0 | 40.79 | 70.5 | 3.307 |
| -85.5 | 0.1751 | -54.0 | 12.99 | -22.5 | 341.6 | 9.0 | 1170 | 40.5 | 38.81 | 72.0 | 2.671 |
| -84.0 | 0.2287 | -52.5 | 14.72 | -21.0 | 420.6 | 10.5 | 1101 | 42.0 | 36.45 | 73.5 | 2.091 |
| -82.5 | 0.2983 | -51.0 | 16.71 | -19.5 | 508.9 | 12.0 | 1024 | 43.5 | 33.80 | 75.0 | 1.543 |
| -81.0 | 0.3851 | -49.5 | 19.09 | -18.0 | 598.7 | 13.5 | 949.0 | 45.0 | 30.82 | 76.5 | 1.054 |
| -79.5 | 0.4551 | -48.0 | 21.85 | -16.5 | 685.1 | 15.0 | 876.7 | 46.5 | 27.79 | 78.0 | 0.7083 |
| -78.0 | 0.5937 | -46.5 | 24.97 | -15.0 | 764.4 | 16.5 | 802.9 | 48.0 | 24.56 | 79.5 | 0.5631 |
| -76.5 | 0.7404 | -45.0 | 28.27 | -13.5 | 844.1 | 18.0 | 719.8 | 49.5 | 21.59 | 81.0 | 0.4607 |
| -75.0 | 1.144 | -43.5 | 31.61 | -12.0 | 922.2 | 19.5 | 627.6 | 51.0 | 19.06 | 82.5 | 0.3906 |
| -73.5 | 1.621 | -42.0 | 34.29 | -10.5 | 1001 | 21.0 | 532.6 | 52.5 | 16.63 | 84.0 | 0.2986 |
| -72.0 | 2.178 | -40.5 | 36.57 | -9.0 | 1085 | 22.5 | 434.5 | 54.0 | 14.68 | 85.5 | 0.2308 |
| -70.5 | 2.758 | -39.0 | 38.54 | -7.5 | 1164 | 24.0 | 356.0 | 55.5 | 12.89 | 87.0 | 0.1917 |
| -69.0 | 3.419 | -37.5 | 40.02 | -6.0 | 1237 | 25.5 | 286.4 | 57.0 | 11.35 | 88.5 | 0.0908 |
| -67.5 | 4.125 | -36.0 | 43.80 | -4.5 | 1302 | 27.0 | 226.8 | 58.5 | 10.01 | 90.0 | 0.0366 |
| -66.0 | 4.990 | -34.5 | 49.44 | -3.0 | 1360 | 28.5 | 177.2 | 60.0 | 8.880 | | |
| -64.5 | 6.006 | -33.0 | 58.69 | -1.5 | 1402 | 30.0 | 135.2 | 61.5 | 8.348 | | |
| -63.0 | 7.087 | -31.5 | 73.68 | 0.0 | 1419 | 31.5 | 102.0 | 63.0 | 7.761 | | |
| -61.5 | 7.946 | -30.0 | 95.53 | 1.5 | 1418 | 33.0 | 78.54 | 64.5 | 6.834 | | |
| -60.0 | 8.420 | -28.5 | 126.3 | 3.0 | 1401 | 34.5 | 62.68 | 66.0 | 5.820 | | |

Electricity Parameter:

Current I: 0.1080A Power: 8.899W
Voltage V: 123.1V PF: 0.669


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 46.2deg @ (50%): 34.1deg @ (75%): 20.5deg @ (50%): 34.1deg
Diffuse angle: @ (25%): 46.2deg @ (50%): 34.1deg @ (75%): 20.5deg @ (50%): 34.1deg
Imax=1419cd (C=0.0deg,G=0.0deg) C0-180Plane Imax= 1419cd(G=0.0deg)
C0-180Plane I0= 1419cd

Lamp Type:WP01Q9
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:HALED DGU10
Test Date:2014-10-16
Humidity:65%
Remarks:

Average Illuminance Figure

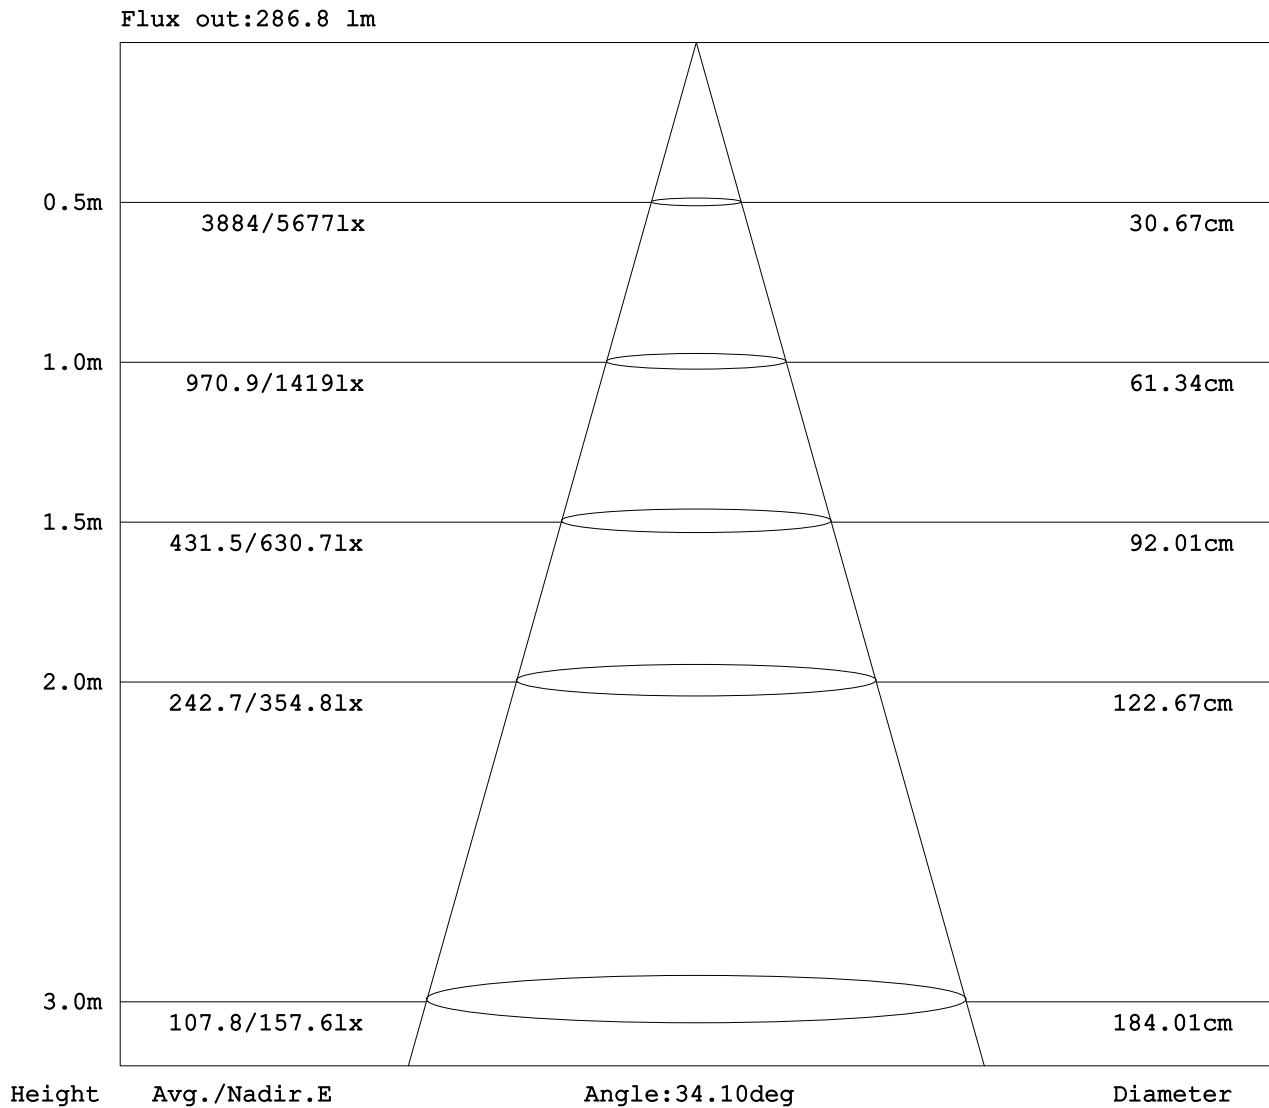

Lamp Type:WP01Q9
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:HALED DGU10
Test Date:2014-10-16
Humidity:65%
Remarks: