

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.0349	-58.5	6.915	-27.0	75.09	4.5	967.6	36.0	29.00	67.5	3.145
-88.5	0.0524	-57.0	7.489	-25.5	96.24	6.0	946.2	37.5	26.08	69.0	2.740
-87.0	0.0700	-55.5	8.504	-24.0	124.6	7.5	917.4	39.0	23.97	70.5	2.296
-85.5	0.1046	-54.0	9.591	-22.5	161.9	9.0	868.4	40.5	22.25	72.0	1.828
-84.0	0.1395	-52.5	10.75	-21.0	212.1	10.5	809.3	42.0	20.84	73.5	1.402
-82.5	0.1756	-51.0	12.21	-19.5	276.6	12.0	735.4	43.5	19.75	75.0	1.067
-81.0	0.2108	-49.5	13.71	-18.0	358.2	13.5	657.2	45.0	18.25	76.5	0.7320
-79.5	0.2826	-48.0	15.31	-16.5	443.5	15.0	574.0	46.5	16.76	78.0	0.4817
-78.0	0.4738	-46.5	16.99	-15.0	527.5	16.5	481.0	48.0	15.38	79.5	0.3164
-76.5	0.7218	-45.0	18.64	-13.5	610.9	18.0	396.9	49.5	13.95	81.0	0.2266
-75.0	1.071	-43.5	20.20	-12.0	693.0	19.5	318.4	51.0	12.51	82.5	0.1767
-73.5	1.423	-42.0	21.12	-10.5	771.0	21.0	248.0	52.5	11.06	84.0	0.1417
-72.0	1.863	-40.5	21.78	-9.0	838.4	22.5	192.2	54.0	9.751	85.5	0.0914
-70.5	2.351	-39.0	23.06	-7.5	894.7	24.0	149.1	55.5	8.621	87.0	0.0717
-69.0	2.803	-37.5	24.51	-6.0	933.8	25.5	116.2	57.0	7.607	88.5	0.0367
-67.5	3.229	-36.0	26.28	-4.5	955.3	27.0	90.31	58.5	6.925	90.0	0.0191
-66.0	3.805	-34.5	29.10	-3.0	957.6	28.5	70.75	60.0	6.261		
-64.5	4.476	-33.0	33.34	-1.5	960.9	30.0	56.54	61.5	5.615		
-63.0	5.220	-31.5	39.11	0.0	962.7	31.5	45.79	63.0	4.985		
-61.5	5.792	-30.0	47.32	1.5	967.0	33.0	38.31	64.5	4.300		
-60.0	6.344	-28.5	59.17	3.0	972.8	34.5	33.04	66.0	3.653		

Electricity Parameter:

Current I: 0.0410A Power: 7.785W
Voltage V: 230.5V PF: 0.823


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 41.3deg @ (50%): 32.1deg @ (75%): 23.3deg @ (50%): 32.1deg
Diffuse angle: @ (25%): 41.4deg @ (50%): 32.2deg @ (75%): 23.6deg @ (50%): 32.2deg
Imax=972.8cd (C=0.0deg,G=2.5deg) C0-180Plane Imax= 972.8cd(G=2.5deg)
C0-180Plane I0= 962.7cd

Lamp Type:HALED DMR16
Tester:
Temperature:25.3deg
Manufacturer:

Luminaires Type:
Test Date:2014-06-25
Humidity:65%
Remarks:

Average Illuminance Figure

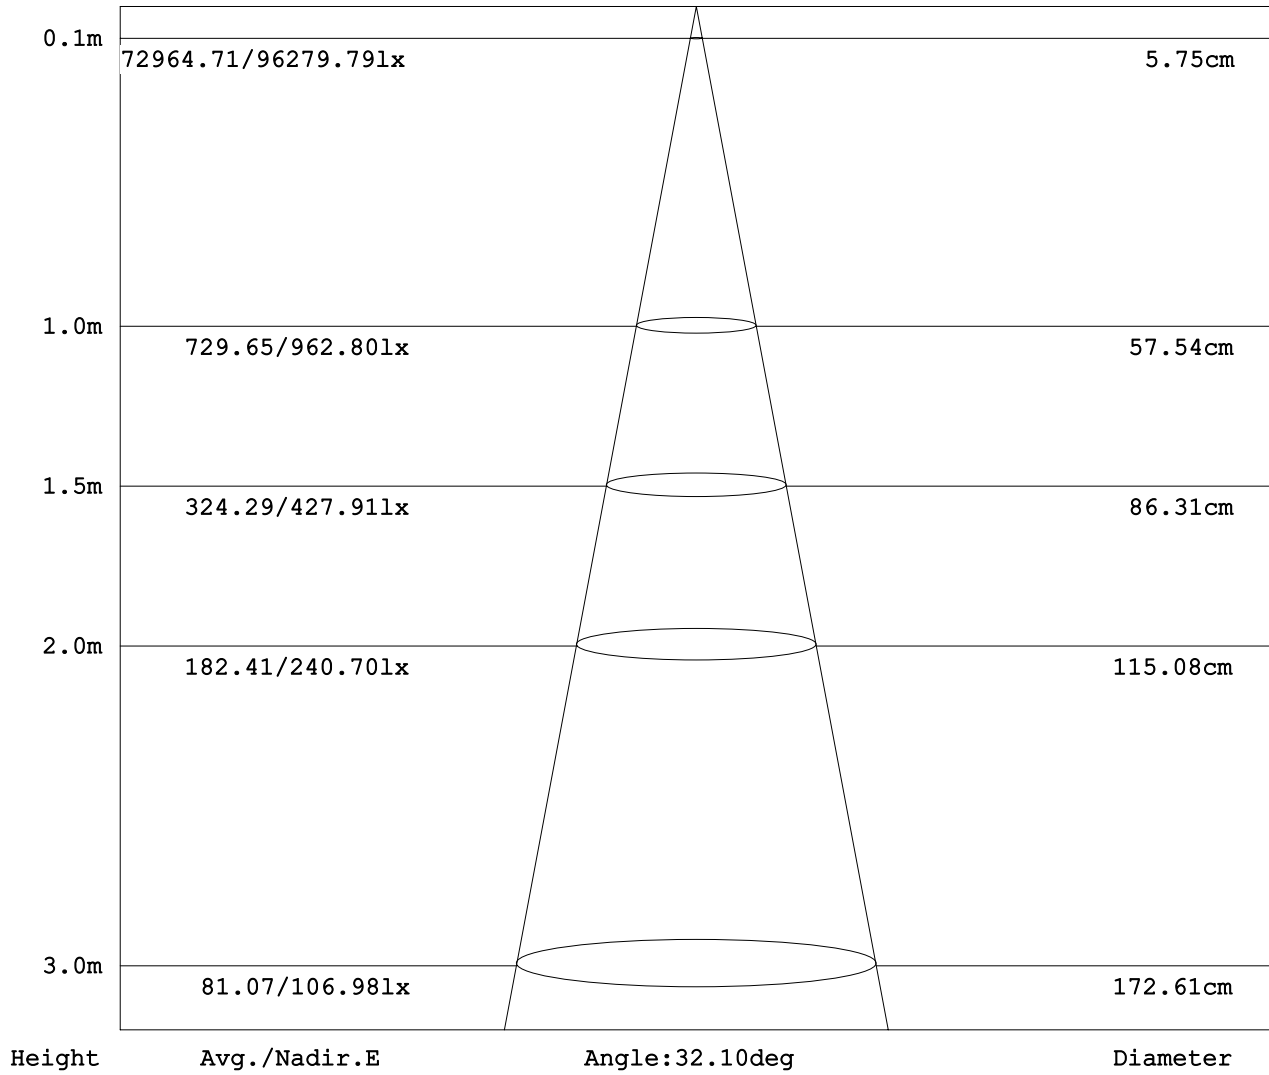

Lamp Type:HALED DMR16
 Tester:
 Temperature:25.3deg
 Manufacturer:

Luminaires Type:
 Test Date:2014-06-25
 Humidity:65%
 Remarks: