

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1395	-58.5	8.160	-27.0	195.0	4.5	916.6	36.0	34.03	67.5	3.377
-88.5	0.1917	-57.0	9.299	-25.5	242.4	6.0	884.2	37.5	30.36	69.0	2.838
-87.0	0.2266	-55.5	10.54	-24.0	293.1	7.5	850.3	39.0	28.80	70.5	2.317
-85.5	0.2615	-54.0	11.99	-22.5	356.4	9.0	810.0	40.5	27.68	72.0	1.790
-84.0	0.2789	-52.5	13.96	-21.0	423.5	10.5	766.2	42.0	26.29	73.5	1.353
-82.5	0.3144	-51.0	15.72	-19.5	493.9	12.0	716.7	43.5	24.90	75.0	0.9798
-81.0	0.3676	-49.5	18.13	-18.0	562.9	13.5	673.6	45.0	22.78	76.5	0.6448
-79.5	0.4404	-48.0	20.78	-16.5	622.9	15.0	617.2	46.5	20.61	78.0	0.4092
-78.0	0.7210	-46.5	22.76	-15.0	679.4	16.5	555.6	48.0	17.77	79.5	0.3338
-76.5	1.036	-45.0	24.86	-13.5	728.3	18.0	482.4	49.5	15.62	81.0	0.2814
-75.0	1.406	-43.5	26.58	-12.0	779.7	19.5	414.1	51.0	13.90	82.5	0.2464
-73.5	1.844	-42.0	27.65	-10.5	822.5	21.0	345.6	52.5	12.10	84.0	0.2288
-72.0	2.334	-40.5	28.72	-9.0	864.5	22.5	282.6	54.0	10.76	85.5	0.1785
-70.5	2.823	-39.0	31.08	-7.5	895.8	24.0	227.6	55.5	9.516	87.0	0.1589
-69.0	3.384	-37.5	35.71	-6.0	923.5	25.5	182.1	57.0	8.441	88.5	0.1064
-67.5	4.077	-36.0	42.40	-4.5	945.8	27.0	143.2	58.5	7.701	90.0	0.1220
-66.0	4.929	-34.5	53.25	-3.0	952.1	28.5	111.4	60.0	7.242		
-64.5	5.716	-33.0	70.07	-1.5	946.2	30.0	84.71	61.5	6.578		
-63.0	6.480	-31.5	92.46	0.0	946.4	31.5	64.53	63.0	5.778		
-61.5	7.027	-30.0	121.2	1.5	949.5	33.0	49.73	64.5	4.957		
-60.0	7.387	-28.5	154.5	3.0	940.6	34.5	40.21	66.0	4.101		

Electricity Parameter:

Current I: 0.0930A Power: 10.49W
Voltage V: 120.2V PF: 0.931


Optical Parameter (Distance=2.900m) :

Equivalent Luminous flux: $\Phi_{eff} = 431.4lm$ Efficiency: $Eff=41.13lm/W$
Diffuse angle: @ (25%): 49.2deg @ (50%): 37.9deg @ (75%): 25.8deg @ (50%): 37.9deg
Diffuse angle: @ (25%): 49.3deg @ (50%): 38.0deg @ (75%): 26.2deg @ (50%): 38.0deg
 $I_{max}=954.3cd$ (C=0.0deg,G=-3.5deg) C0-180Plane $I_{max}= 954.3cd$ (G=-3.5deg)
C0-180Plane $I_{0}= 946.4cd$

Lamp Type:
Tester:
Temperature:25.3deg
Manufactory:EVERFINE

Luminaires Type:CCD218-52025
Test Date:2014-03-19
Humidity:65%
Remarks:

Average Illuminance Figure

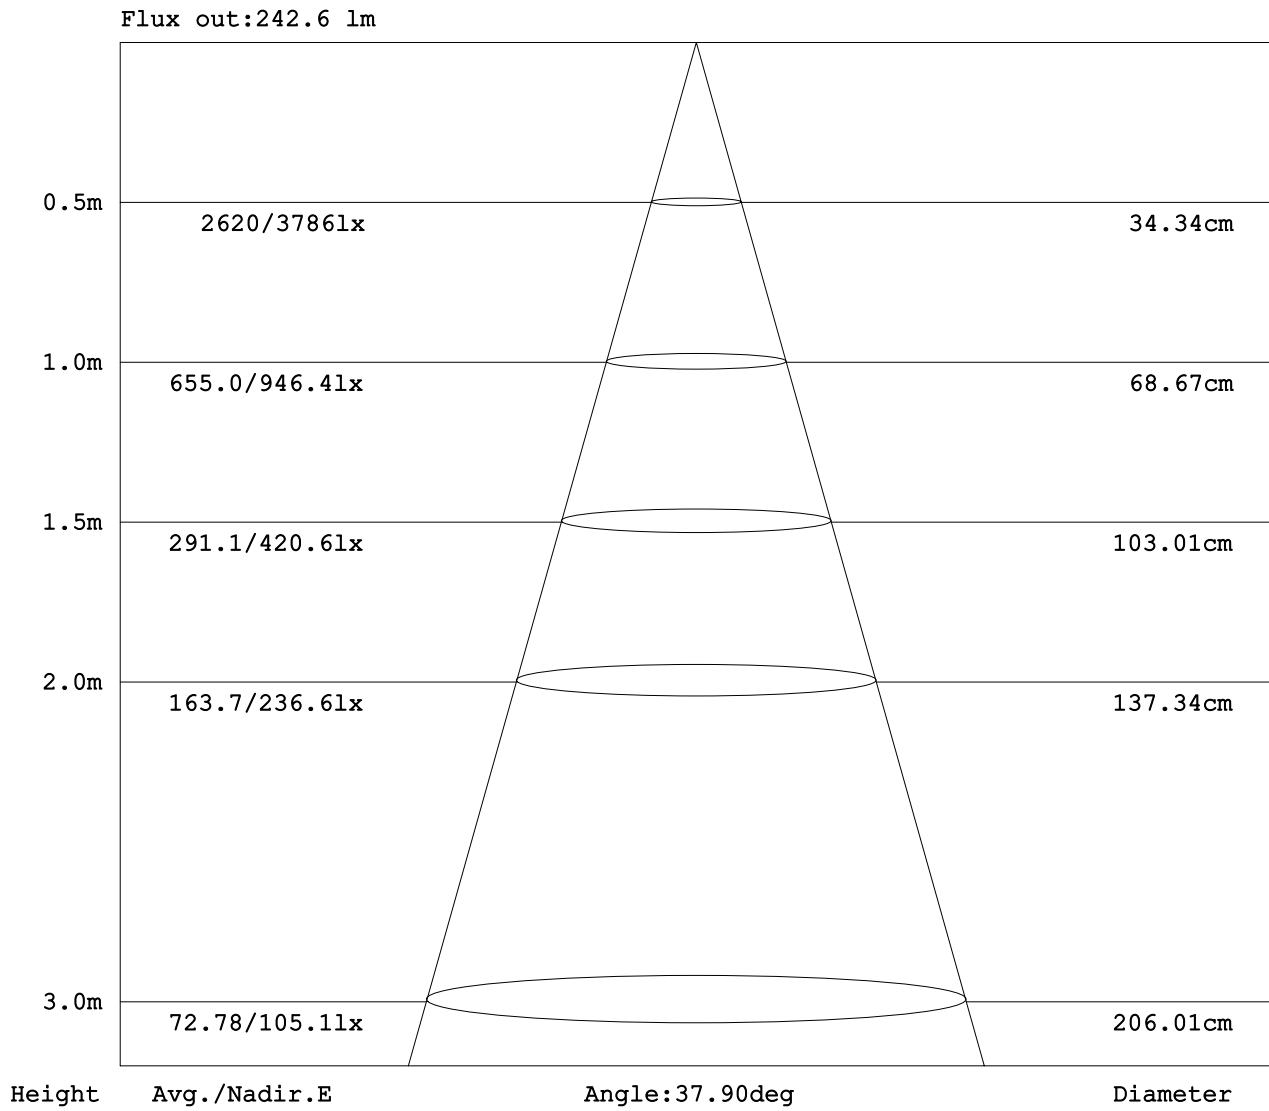

Lamp Type:
Tester:
Temperature:25.3deg
Manufactory:EVERFINE

Luminaires Type:CCD218-52025
Test Date:2014-03-19
Humidity:65%
Remarks: