

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.0	-58.5	6.756	-27.0	67.77	4.5	1506	36.0	27.77	67.5	3.544
-88.5	0.0001	-57.0	7.280	-25.5	83.68	6.0	1394	37.5	25.16	69.0	3.051
-87.0	0.0351	-55.5	7.959	-24.0	102.8	7.5	1257	39.0	23.84	70.5	2.558
-85.5	0.0701	-54.0	8.804	-22.5	128.0	9.0	1101	40.5	23.35	72.0	2.065
-84.0	0.1400	-52.5	9.900	-21.0	160.5	10.5	927.7	42.0	23.33	73.5	1.594
-82.5	0.2273	-51.0	11.71	-19.5	202.6	12.0	762.7	43.5	22.74	75.0	1.217
-81.0	0.2971	-49.5	13.20	-18.0	256.9	13.5	619.8	45.0	21.07	76.5	0.9063
-79.5	0.3853	-48.0	14.69	-16.5	326.2	15.0	493.5	46.5	19.08	78.0	0.6092
-78.0	0.5097	-46.5	16.07	-15.0	407.0	16.5	394.0	48.0	16.96	79.5	0.3966
-76.5	0.7741	-45.0	17.30	-13.5	502.2	18.0	309.2	49.5	14.93	81.0	0.2988
-75.0	1.106	-43.5	18.25	-12.0	614.1	19.5	234.8	51.0	13.24	82.5	0.2290
-73.5	1.439	-42.0	19.25	-10.5	740.3	21.0	179.3	52.5	11.69	84.0	0.1613
-72.0	1.842	-40.5	20.45	-9.0	883.5	22.5	141.1	54.0	10.38	85.5	0.1067
-70.5	2.318	-39.0	21.35	-7.5	1037	24.0	113.5	55.5	8.969	87.0	0.0717
-69.0	2.821	-37.5	22.29	-6.0	1187	25.5	92.85	57.0	7.747	88.5	0.0367
-67.5	3.258	-36.0	24.07	-4.5	1316	27.0	76.36	58.5	7.086	90.0	0.0174
-66.0	3.751	-34.5	27.10	-3.0	1429	28.5	63.08	60.0	6.540		
-64.5	4.293	-33.0	31.35	-1.5	1524	30.0	52.11	61.5	5.981		
-63.0	4.859	-31.5	37.26	0.0	1614	31.5	43.60	63.0	5.452		
-61.5	5.488	-30.0	44.98	1.5	1646	33.0	36.89	64.5	4.744		
-60.0	6.147	-28.5	54.98	3.0	1593	34.5	31.66	66.0	4.093		

**Electricity Parameter:**

Current I: 0.0380A Power: 7.552W  
Voltage V: 230.2V PF: 0.859


**Optical Parameter (Distance=2.900m) :**

Diffuse angle: @ (25%): 31.0deg @ (50%): 20.8deg @ (75%): 13.0deg @ (50%): 20.8deg  
Diffuse angle: @ (25%): 31.3deg @ (50%): 21.2deg @ (75%): 13.7deg @ (50%): 21.2deg  
Imax=1653cd (C=0.0deg,G=1.0deg) C0-180Plane Imax= 1653cd(G=1.0deg)  
C0-180Plane I0= 1614cd

Lamp Type:KP01P7  
Tester:KEVINLI  
Temperature:25.3deg  
Manufacturer:CIVILIGHT

Luminaires Type:HALED DMR16  
Test Date:2014-09-18  
Humidity:65%  
Remarks:内置电源

**Average Illuminance Figure**

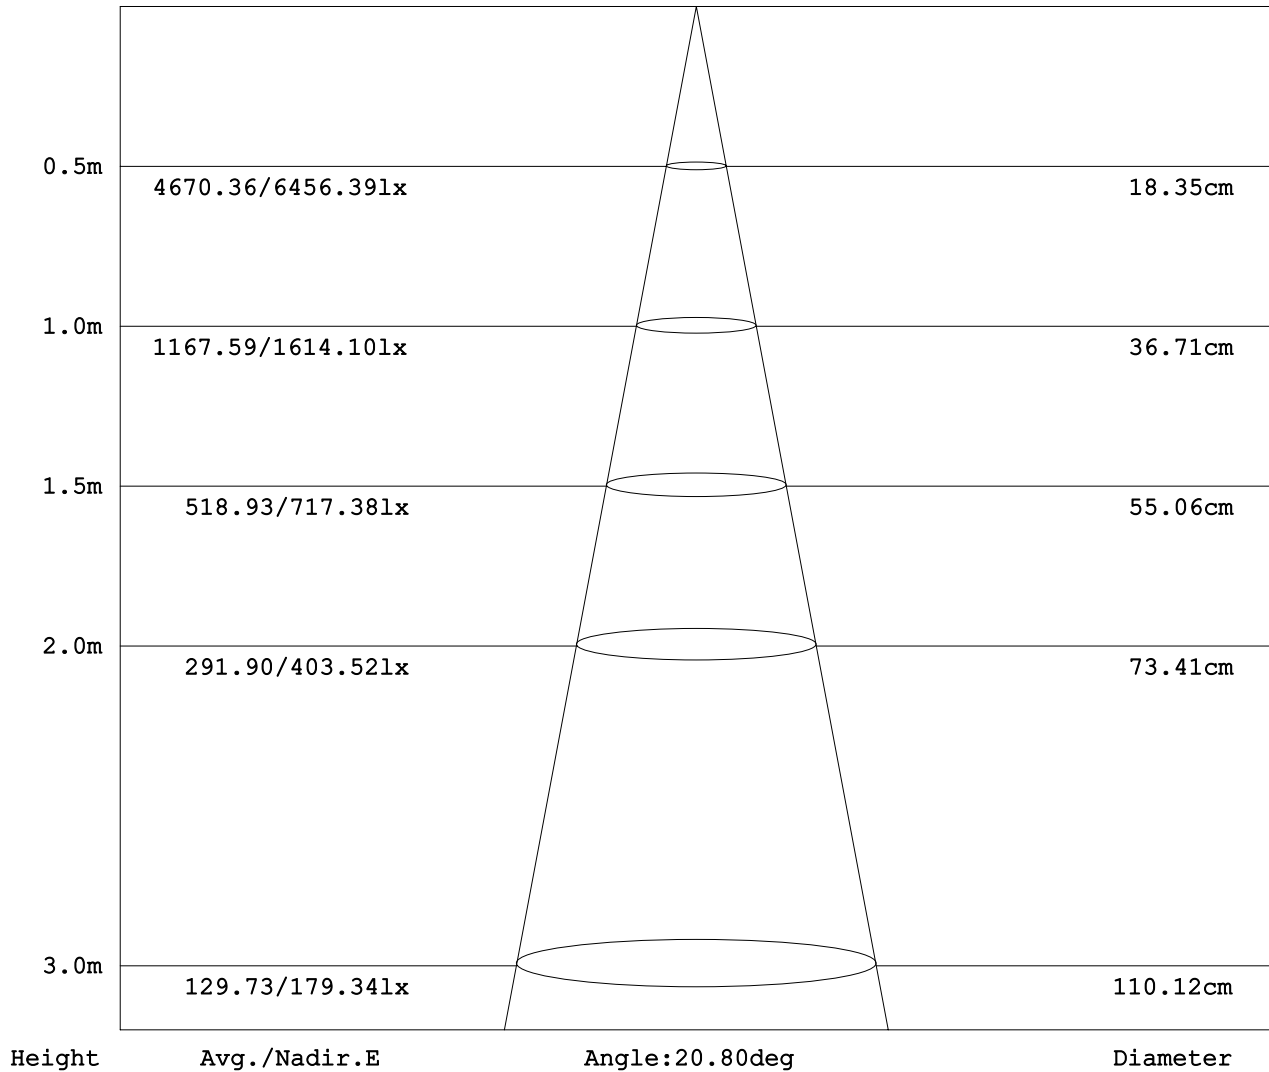

Lamp Type:KP01P7  
 Tester:KEVINLI  
 Temperature:25.3deg  
 Manufacturer:CIVILIGHT

Luminaires Type:HALED DMR16  
 Test Date:2014-09-18  
 Humidity:65%  
 Remarks:内置电源