

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.0174	-58.5	4.432	-27.0	51.19	4.5	1497	36.0	24.12	67.5	3.149
-88.5	0.0174	-57.0	4.848	-25.5	63.59	6.0	1402	37.5	21.73	69.0	2.730
-87.0	0.0349	-55.5	5.274	-24.0	79.00	7.5	1274	39.0	20.31	70.5	2.324
-85.5	0.0697	-54.0	5.825	-22.5	99.31	9.0	1122	40.5	19.54	72.0	1.975
-84.0	0.1046	-52.5	6.818	-21.0	127.1	10.5	942.5	42.0	18.95	73.5	1.674
-82.5	0.1401	-51.0	7.807	-19.5	165.7	12.0	772.8	43.5	18.29	75.0	1.360
-81.0	0.1759	-49.5	8.957	-18.0	216.8	13.5	622.4	45.0	17.77	76.5	1.060
-79.5	0.2440	-48.0	10.20	-16.5	276.1	15.0	490.0	46.5	16.60	78.0	0.7954
-78.0	0.2800	-46.5	11.53	-15.0	349.9	16.5	390.5	48.0	14.96	79.5	0.5361
-76.5	0.3510	-45.0	12.93	-13.5	437.6	18.0	310.6	49.5	13.28	81.0	0.3561
-75.0	0.5295	-43.5	14.49	-12.0	544.1	19.5	244.4	51.0	11.66	82.5	0.2836
-73.5	0.7568	-42.0	16.01	-10.5	670.8	21.0	191.1	52.5	10.24	84.0	0.2288
-72.0	1.020	-40.5	17.07	-9.0	829.8	22.5	150.4	54.0	8.931	85.5	0.1764
-70.5	1.317	-39.0	17.96	-7.5	1009	24.0	119.3	55.5	7.886	87.0	0.1395
-69.0	1.628	-37.5	19.10	-6.0	1176	25.5	95.36	57.0	6.822	88.5	0.1028
-67.5	1.909	-36.0	20.03	-4.5	1322	27.0	76.86	58.5	5.705	90.0	0.0540
-66.0	2.243	-34.5	21.82	-3.0	1450	28.5	61.88	60.0	5.307		
-64.5	2.647	-33.0	24.61	-1.5	1546	30.0	49.85	61.5	4.883		
-63.0	3.106	-31.5	28.62	0.0	1610	31.5	40.38	63.0	4.477		
-61.5	3.528	-30.0	34.01	1.5	1633	33.0	33.12	64.5	4.083		
-60.0	4.050	-28.5	41.50	3.0	1570	34.5	27.81	66.0	3.582		

Electricity Parameter:

Current I: 0.0380A Power: 7.516W
Voltage V: 231.6V PF: 0.837


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 30.0deg @ (50%): 20.7deg @ (75%): 13.5deg @ (50%): 20.7deg
Diffuse angle: @ (25%): 30.2deg @ (50%): 20.9deg @ (75%): 13.9deg @ (50%): 20.9deg
Imax=1635cd (C=0.0deg,G=1.0deg) C0-180Plane Imax= 1635cd(G=1.0deg)
C0-180Plane I0= 1610cd

Lamp Type:WP01P7
Tester:
Temperature:25.3deg
Manufactory:

Luminaires Type:HALED DMR16
Test Date:2014-10-14
Humidity:65%
Remarks:

Average Illuminance Figure

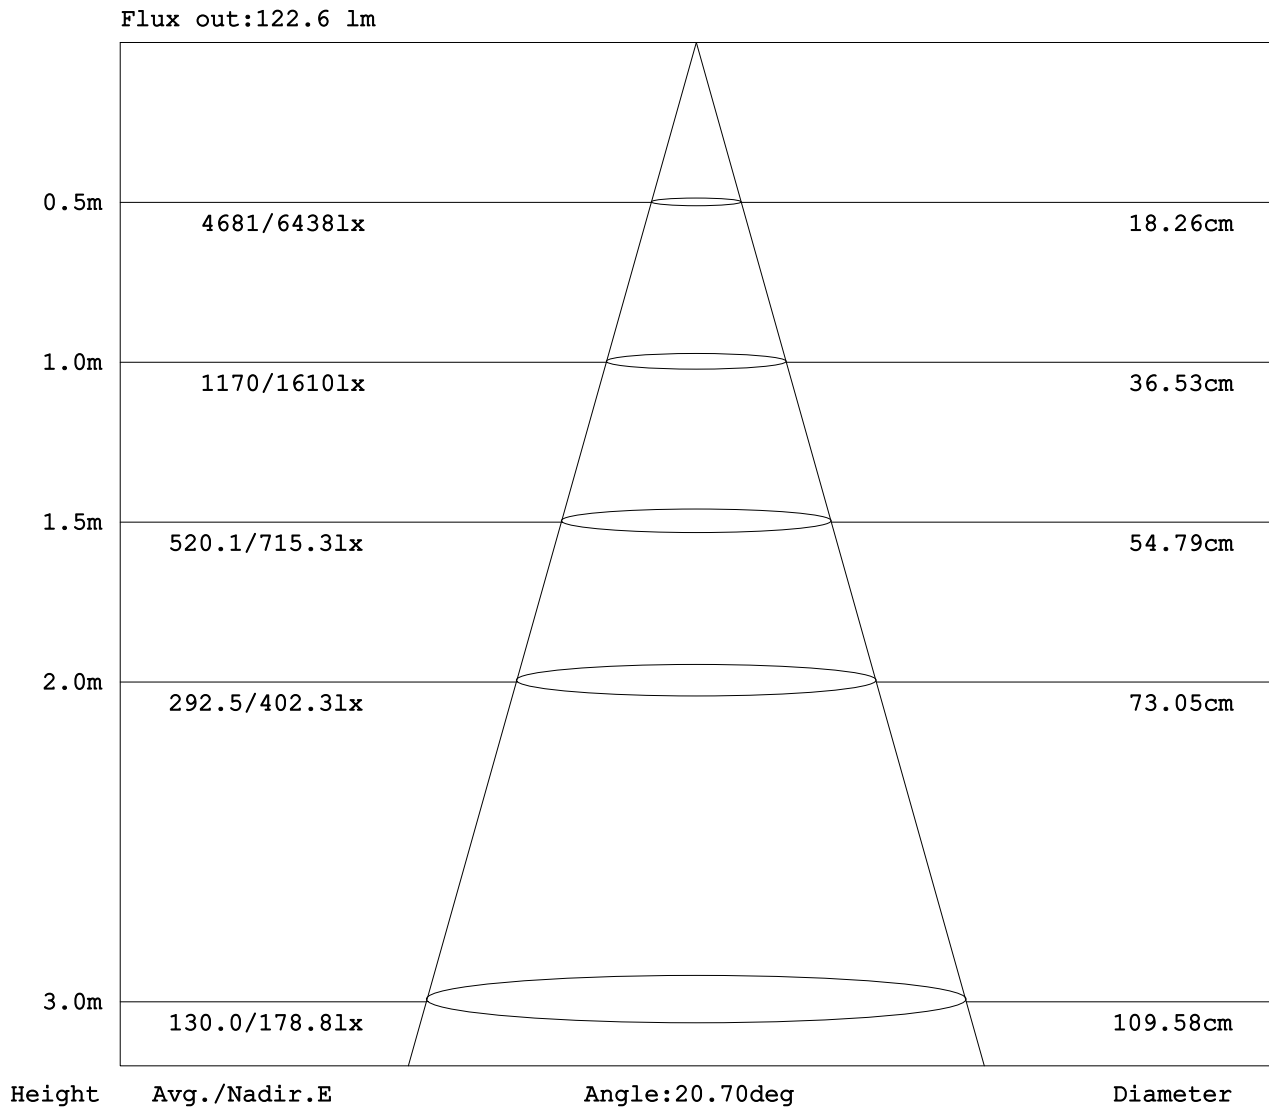

Lamp Type:WP01P7
 Tester:
 Temperature:25.3deg
 Manufactory:

Luminaires Type:HALED DMR16
 Test Date:2014-10-14
 Humidity:65%
 Remarks: