

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.0523	-58.5	5.585	-27.0	76.88	4.5	770.1	36.0	31.60	67.5	4.150
-88.5	0.0524	-57.0	6.129	-25.5	100.3	6.0	764.1	37.5	27.19	69.0	3.654
-87.0	0.0877	-55.5	6.887	-24.0	131.3	7.5	743.4	39.0	24.00	70.5	3.231
-85.5	0.1402	-54.0	8.116	-22.5	171.1	9.0	712.5	40.5	21.73	72.0	2.861
-84.0	0.2102	-52.5	9.271	-21.0	223.0	10.5	668.2	42.0	20.07	73.5	2.430
-82.5	0.2976	-51.0	10.74	-19.5	281.1	12.0	612.3	43.5	18.88	75.0	2.060
-81.0	0.3851	-49.5	12.25	-18.0	350.5	13.5	551.2	45.0	17.60	76.5	1.757
-79.5	0.4899	-48.0	13.97	-16.5	424.5	15.0	477.0	46.5	16.24	78.0	1.495
-78.0	0.6133	-46.5	15.79	-15.0	496.3	16.5	410.3	48.0	14.98	79.5	1.218
-76.5	0.8066	-45.0	17.77	-13.5	562.3	18.0	345.4	49.5	13.84	81.0	0.9861
-75.0	1.068	-43.5	19.56	-12.0	625.2	19.5	281.1	51.0	12.81	82.5	0.7741
-73.5	1.316	-42.0	20.19	-10.5	681.1	21.0	221.9	52.5	11.57	84.0	0.6320
-72.0	1.611	-40.5	20.59	-9.0	724.7	22.5	171.8	54.0	10.27	85.5	0.5271
-70.5	1.877	-39.0	21.53	-7.5	751.0	24.0	132.8	55.5	9.206	87.0	0.4378
-69.0	2.193	-37.5	22.62	-6.0	762.8	25.5	157.7	57.0	8.301	88.5	0.3174
-67.5	2.560	-36.0	24.43	-4.5	771.2	27.0	127.0	58.5	7.366	90.0	0.2457
-66.0	2.978	-34.5	27.30	-3.0	768.6	28.5	98.57	60.0	6.715		
-64.5	3.401	-33.0	31.50	-1.5	774.2	30.0	76.55	61.5	6.129		
-63.0	3.913	-31.5	37.73	0.0	786.0	31.5	59.86	63.0	5.658		
-61.5	4.507	-30.0	46.96	1.5	786.9	33.0	47.20	64.5	5.226		
-60.0	5.049	-28.5	59.50	3.0	778.1	34.5	37.96	66.0	4.696		

Electricity Parameter:

Current I: 0.0380A Power: 7.404W
Voltage V: 222.8V PF: 0.852


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 43.4deg @ (50%): 33.9deg @ (75%): 25.3deg @ (50%): 33.9deg
Diffuse angle: @ (25%): 43.4deg @ (50%): 34.0deg @ (75%): 25.4deg @ (50%): 34.0deg
Imax=787.4cd (C=0.0deg,G=2.0deg) C0-180Plane Imax= 787.4cd(G=2.0deg)
C0-180Plane I0= 786.0cd

Lamp Type:WP01P7
Tester:Damin
Temperature:25.3deg
Manufactory:

Luminaires Type:HALED DMR16
Test Date:2014-10-14
Humidity:65%
Remarks:

Average Illuminance Figure

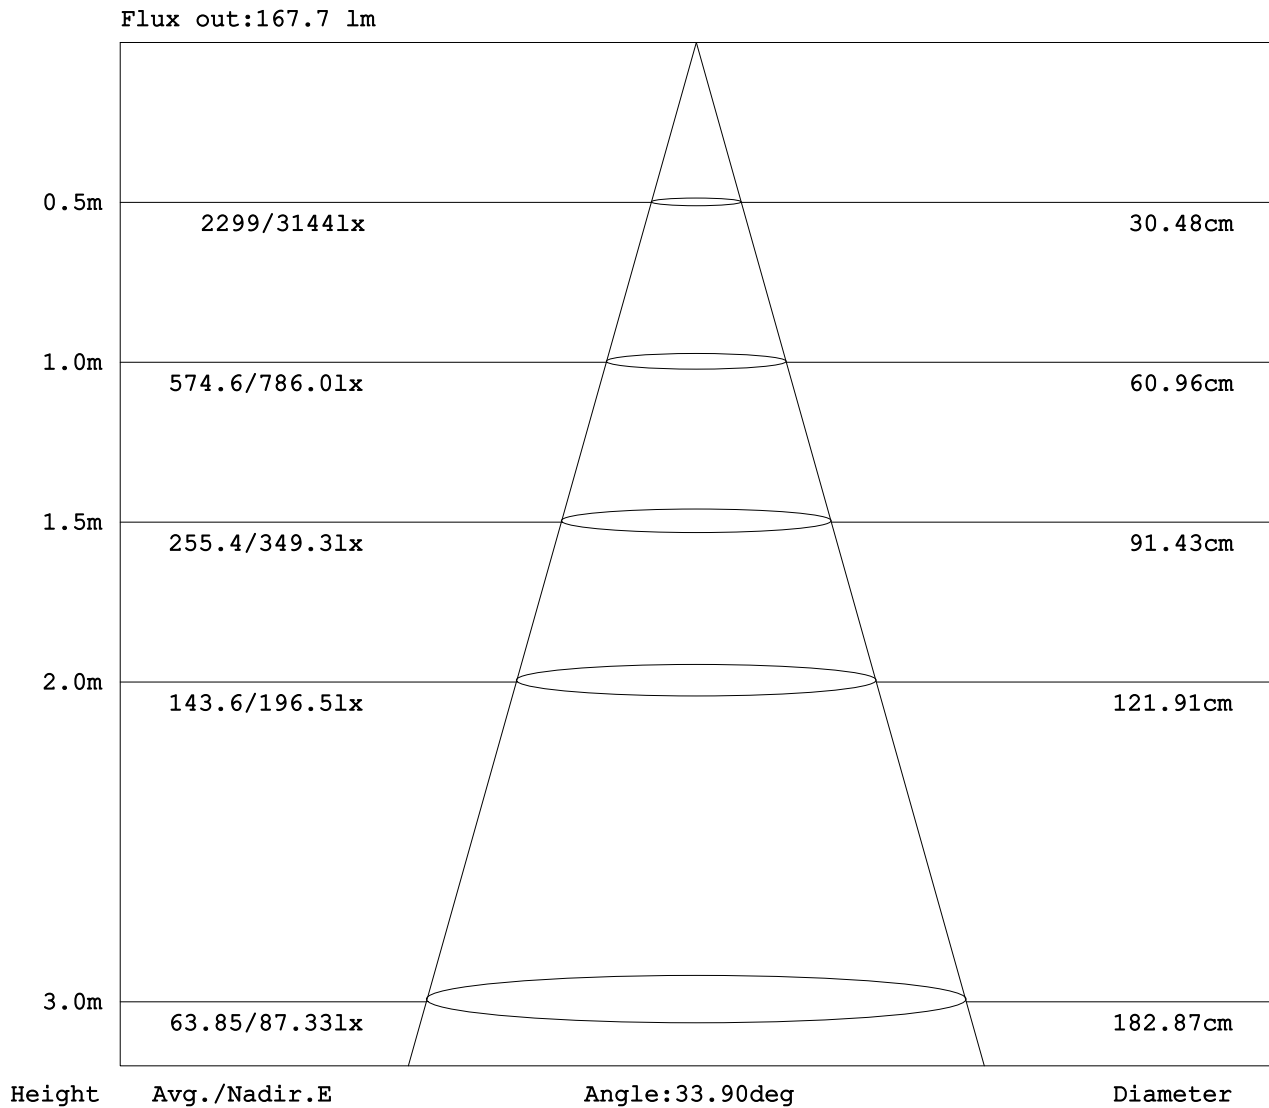

Lamp Type:WP01P7
 Tester:Damin
 Temperature:25.3deg
 Manufactory:

Luminaires Type:HALED DMR16
 Test Date:2014-10-14
 Humidity:65%
 Remarks: