

Professional 14W 5" /6" CRI 95 950LM Downlight **CIVILIGHT®**




Features

- CRI 95, R9=75, 70lm/W
- 75W incandescent equivalent
- 80% energy saving
- Smooth dimming

Applications

- Recessed downlight

Part No.	CUD216 -52117	CUD216 -52108	CUD216 -52118	CUD216 -52119
Wattage (W)	14	14	14	14
Incandescent Equivalent (W)	75	75	75	75
Dimmable	Yes	Yes	Yes	Yes
Socket	E26	E26	E26	E26
Lumens (lm)	910	950	1030	1000
Luminous Intensity (cd)	410	420	450	440
PF	0.98	0.98	0.98	0.98
CCT (K)	2500	2700	3000	5000
CRI (Ra)	97	97	95	95
Voltage (V)	120	120	120	120
Current (mA)	0.100	0.100	0.100	0.100
Frequency (Hz)	60	60	60	60
Beam Angle (deg)	90°	90°	90°	90°
Lifespan (hrs)	35000	35000	35000	35000
Working Temperature (°C)	-20-40	-20-40	-20-40	-20-40
Storage Temperature (°C)	-40-80	-40-80	-40-80	-40-80
Weight (ounces)	9.17	9.17	9.17	9.17

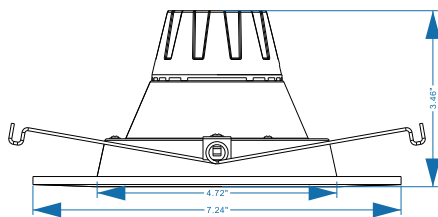

At \$0.11 per kWh, this 14W LED downlight estimates energy cost \$1.69 per year, using \$53.9 of electricity over its 35000 hour lifetime. This is a \$234.85 savings when compared to the \$288.75 required to run a 75W incandescent over the same period. Actual savings will vary depending on cost per kWh. 32 years means rated average life based on engineering testing and probability analysis where the lamp is used 3 hours per day, 7 days a week.

* Note: Data is subject to change without prior notice. Please visit www.civilight-na.com for further information.

Cautions

- Power off before replacing
- Don't touch lamp when lit



CIVILIGHT NORTH AMERICA CORP

Address: 522 Buxton Grant Drive, Cary, NC 27519
TEL: 919-234-0853 / WEB: www.civilight-na.com