

Intensity data:(deg , cd) C0-180

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	0.1105	-58.5	10.66	-27.0	222.5	4.5	1670	36.0	37.23	67.5	3.605
-88.5	0.1843	-57.0	12.04	-25.5	269.1	6.0	1540	37.5	33.87	69.0	3.021
-87.0	0.2581	-55.5	13.86	-24.0	315.6	7.5	1396	39.0	30.34	70.5	2.437
-85.5	0.3508	-54.0	15.89	-22.5	375.5	9.0	1244	40.5	28.07	72.0	1.802
-84.0	0.4616	-52.5	18.22	-21.0	450.6	10.5	1078	42.0	25.65	73.5	1.282
-82.5	0.5539	-51.0	20.44	-19.5	544.9	12.0	899.1	43.5	24.21	75.0	0.8175
-81.0	0.6647	-49.5	22.68	-18.0	667.5	13.5	735.5	45.0	21.75	76.5	0.6661
-79.5	0.7416	-48.0	25.37	-16.5	813.5	15.0	598.3	46.5	19.69	78.0	0.5584
-78.0	1.133	-46.5	27.09	-15.0	966.9	16.5	468.2	48.0	17.96	79.5	0.4844
-76.5	1.632	-45.0	29.12	-13.5	1133	18.0	377.2	49.5	15.80	81.0	0.3921
-75.0	2.187	-43.5	30.89	-12.0	1294	19.5	307.4	51.0	13.94	82.5	0.3156
-73.5	2.761	-42.0	33.56	-10.5	1450	21.0	253.5	52.5	12.25	84.0	0.2441
-72.0	3.315	-40.5	36.56	-9.0	1593	22.5	208.2	54.0	10.87	85.5	0.1886
-70.5	3.966	-39.0	40.05	-7.5	1711	24.0	168.3	55.5	9.915	87.0	0.1126
-69.0	4.719	-37.5	45.31	-6.0	1829	25.5	133.4	57.0	8.978	88.5	0.0921
-67.5	5.421	-36.0	54.27	-4.5	1940	27.0	104.5	58.5	8.151	90.0	0.0755
-66.0	6.148	-34.5	67.56	-3.0	2013	28.5	82.12	60.0	7.371		
-64.5	6.981	-33.0	85.22	-1.5	2013	30.0	66.53	61.5	6.535		
-63.0	7.773	-31.5	109.5	0.0	2007	31.5	54.41	63.0	5.779		
-61.5	8.661	-30.0	141.7	1.5	1913	33.0	46.22	64.5	5.082		
-60.0	9.651	-28.5	179.7	3.0	1796	34.5	41.00	66.0	4.366		

**Electricity Parameter:**

Current I: 0.0790A Power: 9.073W  
Voltage V: 122.4V PF: 0.931


**Optical Parameter (Distance=2.900m) :**

Diffuse angle: @ (25%): 36.0deg @ (50%): 25.5deg @ (75%): 16.1deg @ (50%): 25.5deg  
Diffuse angle: @ (25%): 36.0deg @ (50%): 25.6deg @ (75%): 16.3deg @ (50%): 25.6deg  
Imax=2021cd (C=0.0deg,G=-2.5deg) C0-180Plane Imax= 2021cd(G=-2.5deg)  
C0-180Plane I0= 2007cd

Lamp Type: 泛光灯  
Tester:  
Temperature: 25.3deg  
Manufacturer:

Luminaires Type:  
Test Date: 2015-03-20  
Humidity: 65%  
Remarks:

**Average Illuminance Figure**

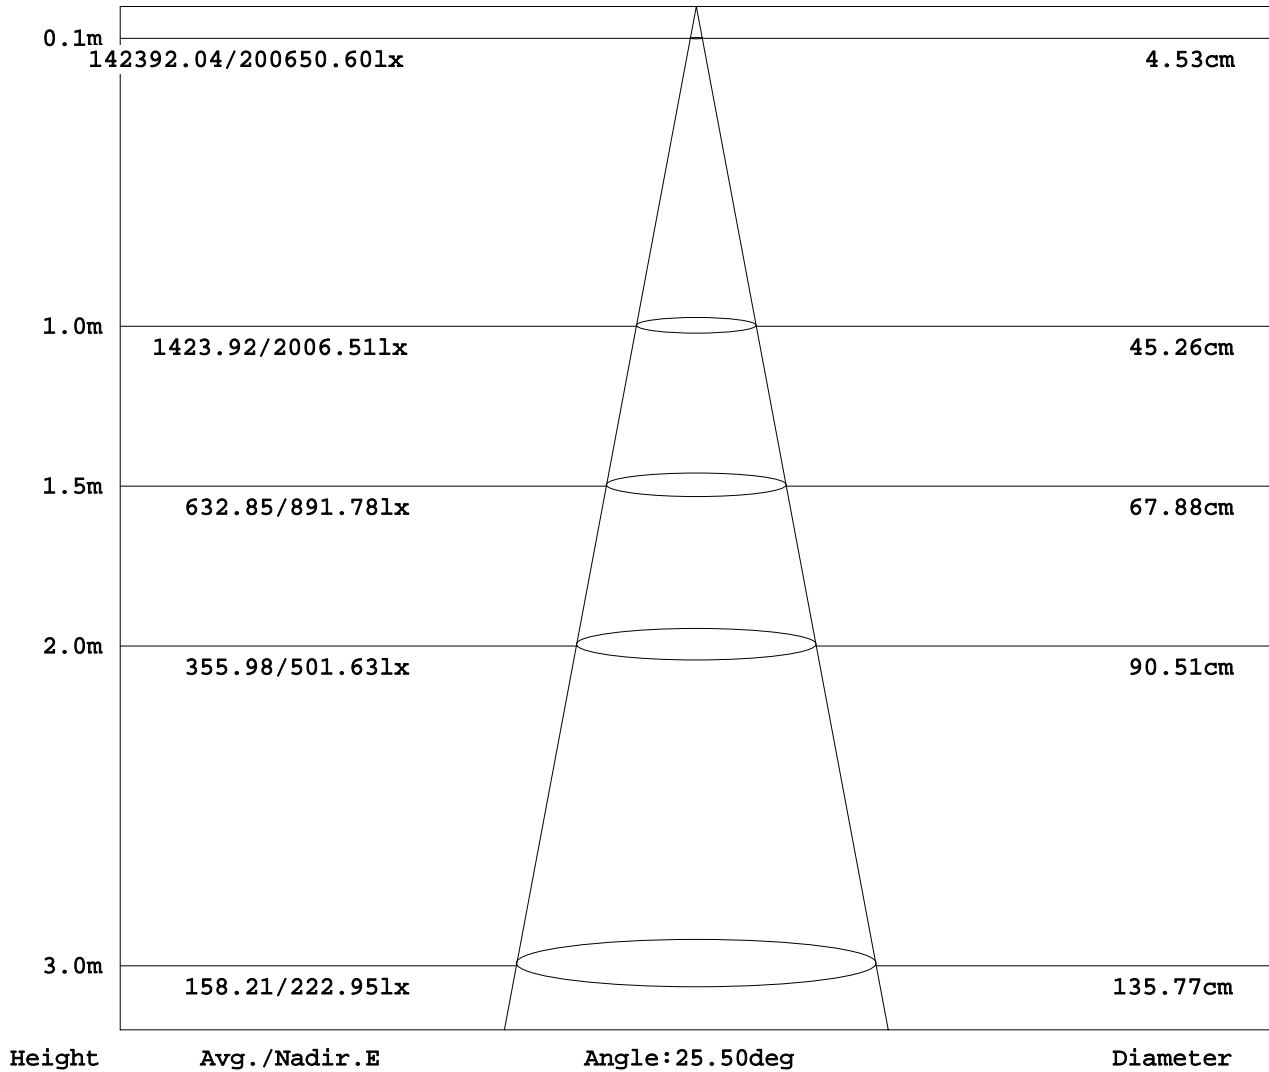

Lamp Type: 泛光灯  
 Tester:  
 Temperature: 25.3deg  
 Manufacturer:

Luminaires Type:  
 Test Date: 2015-03-20  
 Humidity: 65%  
 Remarks: