

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.7321	-58.5	54.58	-27.0	646.1	4.5	2157	36.0	247.3	67.5	34.45
-88.5	2.654	-57.0	58.33	-25.5	743.1	6.0	2107	37.5	208.7	69.0	31.80
-87.0	4.822	-55.5	62.25	-24.0	852.0	7.5	2056	39.0	175.6	70.5	29.26
-85.5	7.095	-54.0	66.48	-22.5	971.0	9.0	1991	40.5	149.0	72.0	26.78
-84.0	9.452	-52.5	71.06	-21.0	1099	10.5	1912	42.0	128.0	73.5	24.40
-82.5	11.69	-51.0	76.40	-19.5	1232	12.0	1826	43.5	112.3	75.0	21.90
-81.0	14.06	-49.5	82.47	-18.0	1368	13.5	1731	45.0	100.2	76.5	19.44
-79.5	16.42	-48.0	89.53	-16.5	1500	15.0	1618	46.5	91.07	78.0	17.09
-78.0	18.78	-46.5	98.09	-15.0	1622	16.5	1485	48.0	83.78	79.5	14.61
-76.5	21.19	-45.0	109.0	-13.5	1726	18.0	1343	49.5	77.65	81.0	12.18
-75.0	23.66	-43.5	123.0	-12.0	1819	19.5	1200	51.0	72.34	82.5	9.825
-73.5	25.99	-42.0	141.3	-10.5	1906	21.0	1062	52.5	67.57	84.0	7.375
-72.0	28.45	-40.5	165.0	-9.0	1986	22.5	933.2	54.0	63.35	85.5	4.977
-70.5	31.02	-39.0	195.2	-7.5	2051	24.0	813.4	55.5	59.41	87.0	2.728
-69.0	33.58	-37.5	231.8	-6.0	2103	25.5	705.4	57.0	55.63	88.5	0.6395
-67.5	36.27	-36.0	274.1	-4.5	2153	27.0	610.3	58.5	52.18	90.0	0.1603
-66.0	39.01	-34.5	317.2	-3.0	2203	28.5	528.0	60.0	48.90		
-64.5	41.79	-33.0	369.7	-1.5	2241	30.0	450.9	61.5	45.71		
-63.0	44.79	-31.5	426.2	0.0	2254	31.5	392.0	63.0	42.71		
-61.5	47.95	-30.0	489.6	1.5	2240	33.0	338.9	64.5	39.86		
-60.0	51.17	-28.5	561.6	3.0	2204	34.5	290.8	66.0	37.14		

Electricity Parameter:

Current I: 0.1960A Power: 19.41W
Voltage V: 119.6V PF: 0.824


Optical Parameter (Distance=2.900m) :

Diffuse angle: @ (25%): 56.2deg @ (50%): 40.8deg @ (75%): 28.0deg @ (50%): 40.8deg
Diffuse angle: @ (25%): 56.2deg @ (50%): 40.8deg @ (75%): 28.0deg @ (50%): 40.8deg
Imax=2254cd (C=0.0deg,G=0.0deg) C0-180Plane Imax= 2254cd(G=0.0deg)
C0-180Plane I0= 2254cd

Lamp Type:DPAR38 NP01Q19
Tester:
Temperature:25.3deg
Manufactory:EVERFINE

Luminaires Type:
Test Date:2014-04-10
Humidity:65%
Remarks:

Average Illuminance Figure

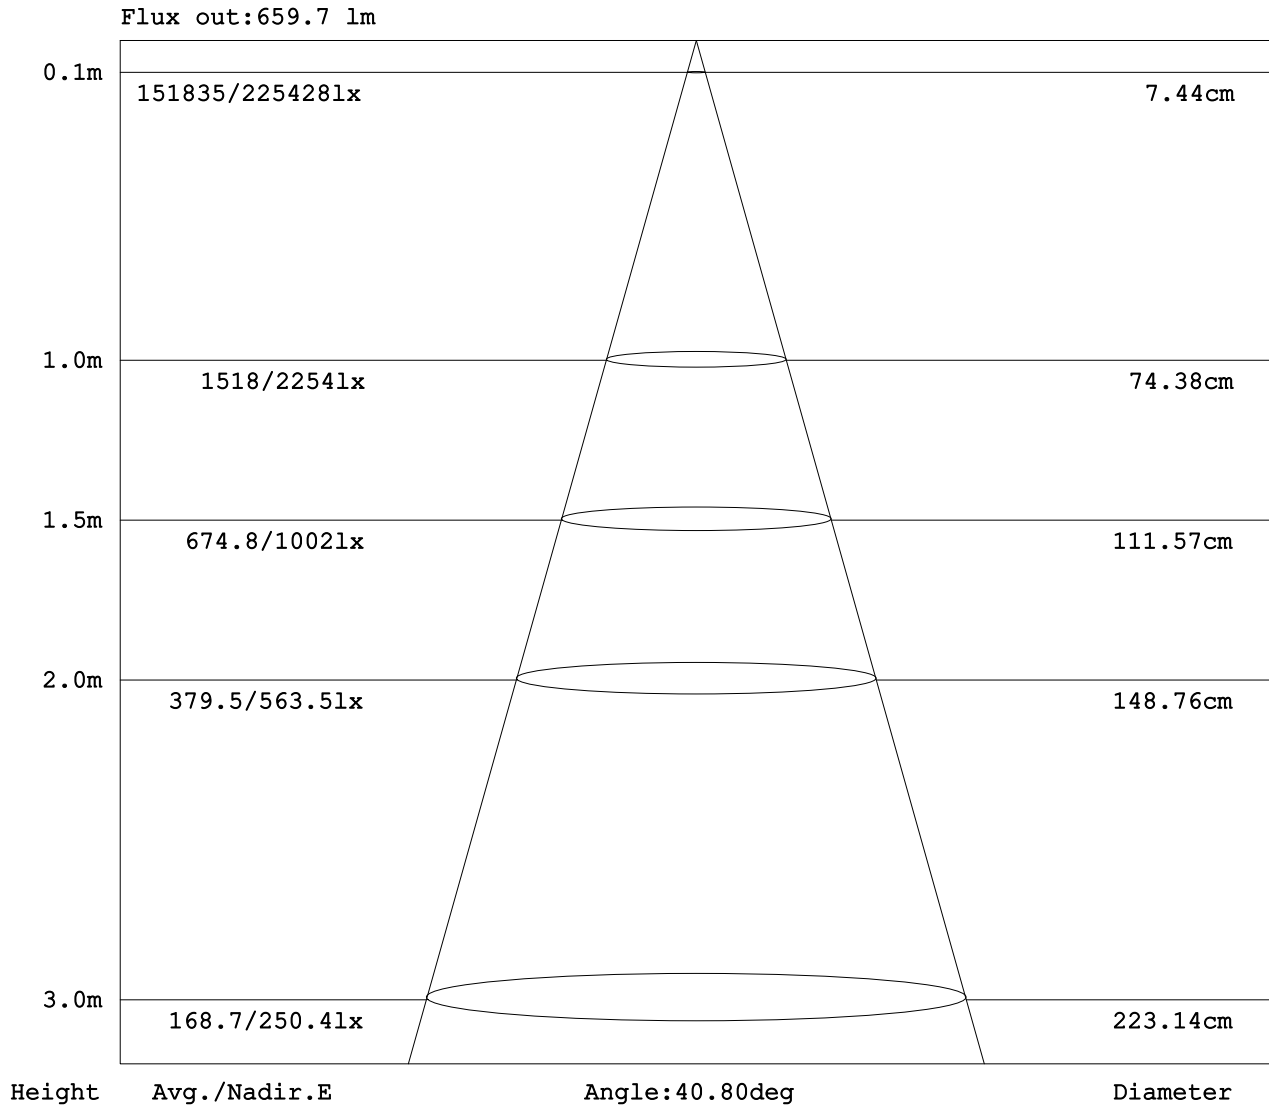

Lamp Type:DPAR38 NP01Q19
 Tester:
 Temperature:25.3deg
 Manufactory:EVERFINE

Luminaires Type:
 Test Date:2014-04-10
 Humidity:65%
 Remarks: