

Intensity data:(deg , cd) C0-180

	A		I A		I A		I A		I A		I A
-90.0	0.0523	-58.5	9.803	-27.0	157.4	4.5	1375	36.0	51.58	67.5	5.309
-88.5	0.0873	-57.0	10.68	-25.5	208.4	6.0	1334	37.5	46.06	69.0	4.515
-87.0	0.1577	-55.5	12.01	-24.0	268.3	7.5	1270	39.0	42.03	70.5	3.809
-85.5	0.2448	-54.0	13.64	-22.5	336.5	9.0	1198	40.5	40.28	72.0	3.107
-84.0	0.3317	-52.5	15.43	-21.0	416.9	10.5	1119	42.0	38.41	73.5	2.587
-82.5	0.4197	-51.0	17.38	-19.5	501.9	12.0	1035	43.5	36.33	75.0	2.020
-81.0	0.5063	-49.5	19.89	-18.0	590.1	13.5	955.7	45.0	33.37	76.5	1.490
-79.5	0.6119	-48.0	22.50	-16.5	675.4	15.0	874.9	46.5	30.10	78.0	1.047
-78.0	0.7353	-46.5	25.79	-15.0	760.6	16.5	791.9	48.0	26.38	79.5	0.7949
-76.5	0.8973	-45.0	29.91	-13.5	845.3	18.0	705.5	49.5	22.57	81.0	0.6699
-75.0	1.284	-43.5	32.70	-12.0	926.1	19.5	619.1	51.0	19.99	82.5	0.5475
-73.5	1.809	-42.0	36.06	-10.5	1005	21.0	516.2	52.5	17.70	84.0	0.4577
-72.0	2.386	-40.5	37.83	-9.0	1080	22.5	416.7	54.0	15.58	85.5	0.3835
-70.5	2.929	-39.0	39.96	-7.5	1159	24.0	332.5	55.5	13.86	87.0	0.2983
-69.0	3.599	-37.5	41.40	-6.0	1234	25.5	260.9	57.0	12.29	88.5	0.2128
-67.5	4.317	-36.0	44.65	-4.5	1293	27.0	200.1	58.5	10.97	90.0	0.1080
-66.0	5.106	-34.5	49.50	-3.0	1353	28.5	151.4	60.0	9.896		
-64.5	6.043	-33.0	57.12	-1.5	1386	30.0	113.9	61.5	9.136		
-63.0	7.094	-31.5	69.15	0.0	1391	31.5	87.51	63.0	8.406		
-61.5	8.202	-30.0	87.92	1.5	1388	33.0	70.15	64.5	7.355		
-60.0	9.034	-28.5	117.0	3.0	1387	34.5	59.21	66.0	6.333		

**Electricity Parameter:**

Current I: 0.1120A Power: 9.027W  
Voltage V: 119.6V PF: 0.672


**Optical Parameter (Distance=2.900m) :**

Diffuse angle: @ (25%): 45.9deg @ (50%): 34.2deg @ (75%): 21.4deg @ (50%): 34.2deg  
Diffuse angle: @ (25%): 45.9deg @ (50%): 34.2deg @ (75%): 21.4deg @ (50%): 34.2deg  
Imax=1392cd (C=0.0deg,G=-0.5deg) C0-180Plane Imax= 1392cd(G=-0.5deg)  
C0-180Plane I0= 1391cd

Lamp Type:HALED DGU10  
Tester:  
Temperature:25.3deg  
Manufacturer:EVERFINE

Luminaires Type:  
Test Date:2014-09-04  
Humidity:65%  
Remarks:

**Average Illuminance Figure**

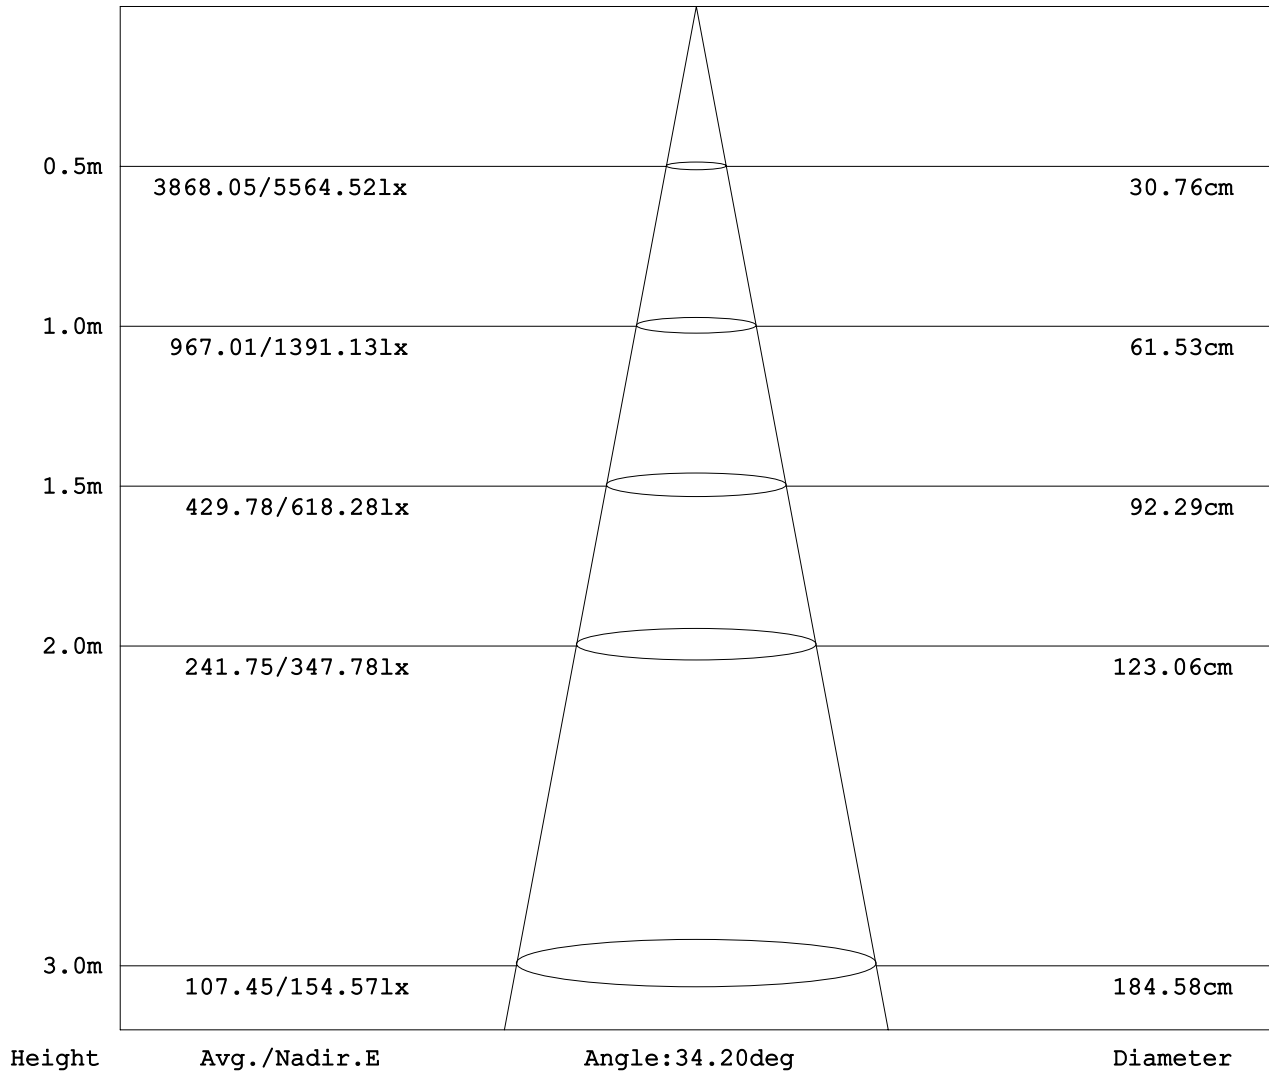

Lamp Type:HALED DGU10  
 Tester:  
 Temperature:25.3deg  
 Manufacturer:EVERFINE

Luminaires Type:  
 Test Date:2014-09-04  
 Humidity:65%  
 Remarks: